

WORK CYCLE

SAP Configuration Guide

Version: 7.3

Written by: Product Knowledge, R&D
Date: January 2017

© 2016 Lexmark International Technology, S.A. All rights reserved.

Lexmark is a trademark of Lexmark International Technology, S.A., or its subsidiaries, registered in the U.S. and/or other countries. All other trademarks are the property of their respective owners. No part of this publication may be reproduced, stored, or transmitted in any form without the prior written permission of Lexmark.

Table of Contents

Introduction	5
Welcome.....	5
About this guide.....	5
Typographical conventions.....	6
Creating workflows	6
Other configuration options	6
Creating workflow shells.....	7
Creating workflow steps	7
Assigning workflow steps to workflow shells	7
Activating workflows	8
Assigning default recipients.....	8
Processor pre-allocation and assignment matrix	9
Line-item approval	10
Workflow step conditions.....	11
Deleting workflows.....	15
Other configuration tasks	15
User management.....	15
Email templates	20
One-time vendor fields in the Web Application	28
Viewing PROCESS DIRECTOR documents.....	29
Creating field statuses	29
Integrating with SAP Business Workflow	32
Programs and functions.....	49
ARCHIV_NOTE_LATE	50
ARCHIV_WCLOG_REPAIR	50
DUE_DATE_CHECK.....	51
/COCKPIT/WC_CHK_DEL_USRS.....	52
WC_DEBUG	52
WC_RFC_LOG.....	52
WC_SET_NOT_ARCHIVED	53
WC_UMA_PASSWD_INIT	53
WC_USER_UPDATE	54
WC_WEB_LOGGING.....	56

XPRA_V720_SP0.....	56
Appendix A – IMG	56
Setting the Web Application URL	57
Define workflow	57
Define workflow steps.....	59
Optional settings for workflow steps	66
Workflow steps, assign processors	69
Workflow processes and step conditions	70
Activate workflows	72
Set up general workflow texts.....	73
Activate authorization checks in WORK CYCLE	74
Message transformation for checks	74
Limit attachment visibility in applications.....	75
Email settings	75
Presentation and interface.....	78
User management.....	91
Set notes.....	97
Schedule background processing	98
Amendments	99
Appendix B – User Exits.....	99
Interface structure.....	99
Developing User Exits	100
List of User Exits.....	102
Appendix C – Other tasks	158
Copying forms to another client.....	158
Support for other languages.....	159
Index	160

Introduction

Welcome

Welcome to the *ReadSoft WORK CYCLE 7.3 SAP Configuration Guide*.

WORK CYCLE is the workflow component for PROCESS DIRECTOR Accounts Payable, for approving invoices. SAP users can perform these tasks inside the SAP environment. For non-SAP users, a Web Application is available.

This document explains how you can configure WORK CYCLE to suit the requirements of your organization.

Note: This guide explains how to configure WORK CYCLE for PROCESS DIRECTOR Accounts Payable only. For information on configuring workflows for other process types, refer to the *PROCESS DIRECTOR SAP Configuration Guide*.

Please also refer to the following ReadSoft guides:

- *PROCESS DIRECTOR Web Application Configuration Guide*
- *PROCESS DIRECTOR Accounts Payable Configuration Guide*

About this guide

This guide describes how to configure WORK CYCLE, the workflow component for PROCESS DIRECTOR Accounts Payable.

The guide contains the following chapters:

- [Creating workflows](#)

Explains how to create and configure workflows.

- [Other configuration tasks](#)

Describes user management, creating email templates, and other tasks.

- [Programs and functions](#)

Details about some programs and functions to perform routine tasks, such as sending emails for overdue invoices.

- [IMG](#)

A complete reference for the WORK CYCLE IMG.

- [User Exits](#)

Descriptions for the User Exit interfaces/templates that come packaged with WORK CYCLE.

- [Other tasks](#)

Information about copying forms between clients in SAP.

Typographical conventions

The following typographical conventions are used:

- Menu names, commands, and dialog names appear in **bold**.
- Names of keys on your keyboard appear in SMALL CAPITAL LETTERS.
- Names of files, folders, and settings appear in `Courier` font.
- SAP transaction codes and program names appear in ARIAL MONOSPACE.
- Variables that have to be replaced by an actual value are *italicized* or appear in <>.

Creating workflows

There are four steps to create a workflow:

1. [Create a workflow "shell."](#)
2. [Create one or more workflow steps.](#)
3. [Assign workflow steps to the workflow shell.](#)
4. [Activate the workflow.](#)

The above four steps are the minimum that is required to get a workflow up and running.

Other configuration options

- [Assigning default recipients](#)
- [Optional settings for workflow steps](#)

Creating workflow shells

Workflow shells are the framework for workflows. To create a shell:

1. Go to [/COCKPIT/WC_WCID](#).
2. Specify a **Workflow ID** and a **Workflow description**.

The workflow description is displayed to workflow recipients, so enter a helpful description.

3. Enter a **Maximum processing time, in days**, **Selection list order**, **Workflow type**.
4. Specify values for remaining settings, which are all optional.
5. Save your entry.

Creating workflow steps

Workflow steps are the building blocks that are combined to form workflows. To create a workflow step, go to [/COCKPIT/WI3](#) and complete all relevant fields.

Assigning workflow steps to workflow shells

After you have created both [workflow shells](#) and [workflow steps](#), you must assign the steps to the shells, thereby building a workflow. To do so:

1. Go to [/COCKPIT/WI4](#).
2. Create a new entry.
3. Specify a workflow.
4. Specify the workflow step that will be the first step in the workflow.
5. Specify **1** as the position of the workflow step in the workflow.
6. Repeat steps 4-5 for each subsequent step in the workflow, using position, 2, 3, 4, etc.
7. Save your entry.

Note: A workflow step can be assigned to more than one workflow shell. For example, if you create a general approval workflow step intended for a manager, you can use this step in multiple workflows, without having to recreate the same workflow step for each workflow.

Activating workflows

Activating workflows is the last step in creating workflows. You must activate your workflow in order for it to be used.

1. Go to [/COCKPIT/WI7](#).
2. Optional: Select a **Company Code** and/or a **PD document type**.

Do this only if you wish to restrict a workflow to one or both of these parameters.

3. Select the workflow to activate.
4. Select either **MM** or **FI**.

If you want to make the workflow available for both types of documents, create a new entry and specify the other document type.

5. Save your entry.

Assigning default recipients

Users can be assigned as recipients of workflow steps in the following ways:

- Manually, either in PROCESS DIRECTOR or WORK CYCLE, when starting or continuing a workflow.
- Automatically and statically, via a [pre-defined recipient allocation to a workflow step](#).
- Automatically and dynamically, via a [User Exit](#).

Note: The Business Solution Package contains other methods for determining the workflow recipient, for example, based on the creator of the purchase order.

Processor pre-allocation and assignment matrix

The result of the [processor assignment settings](#) is influenced by the [Pre-assign processors setting for the workflow step and any user exits](#) that may pre-assign users to workflow steps. The following table shows the results of using the processor assignment and pre-assign processors settings together.

/COCKPIT/WI3	/COCKPIT/WUM2		Result		
Pre-assign processors	Non-default processors assigned	Default processors assigned	Non-default processors pre-assigned to step	Default processors pre-assigned to step	Possible processor allocation to step
() Default assigned processors only	No	No	N/A	N/A	Email and User Groups only
	Yes	No	None	N/A	/COCKPIT/WUM2 users, Email users, and User Groups only
	Yes	Yes	None	Default processor	/COCKPIT/WUM2 users, Email users, and User Groups only
(X) All assigned processors	No	No	N/A	N/A	Email and User Groups only
	Yes	No	Yes	N/A	/COCKPIT/WUM2 users, Email users, and User Groups only
	Yes	Yes	Yes	Default processor	/COCKPIT/WUM2 users, Email users, and User Groups only

/COCKPIT/WI3	/COCKPIT/WUM2		Result		
(A) Default assigned, any other processor	No	No	N/A	N/A	All users
	Yes	No	None	N/A	All users
	Yes	Yes	None	Default processor	All users
(B) All assigned, any other processor	No	No	N/A	N/A	All users
	Yes	No	Yes	N/A	All users
	Yes	Yes	Yes	Default processor	All users

Line-item approval

Line and accounting items for MM and FI invoices can be approved individually, including by different processors. This feature is intended for documents where different persons are responsible for different items on invoices. Workflow steps are completed when all processors have either approved or rejected their items.

Process description

The following describes the basic features of line-item approval:

1. A workflow is started for a document with multiple line or accounting items.
2. Recipients are either entered manually by the PROCESS DIRECTOR user, or determined by a User Exit.
3. Workflow processors open the document and can view and approve all items assigned to them as well as unassigned items.
4. After all items have been approved or rejected, the workflow step is completed.

Activating line-item approval

1. Go to [/COCKPIT/WI3](#).
2. Activate **Line item/account approval** and **All recipients must process**.

Note: You should only activate line-item approval for one step per workflow.

Assigning users to items

When a user is assigned to an item, no other workflow recipients can view the item.

There are two ways users can be assigned to an item:

- *Post-workflow start:* Whenever the user checks the **Approve** box for the item and clicks the **Approve** button.

As no items are pre-assigned to anyone, workflow recipients can initially view all items in the document. After approving one or more items, these items are cleared and other workflow recipients can no longer view or approve them.

- *Pre-workflow start:* Users can be manually assigned to each line item in PROCESS DIRECTOR Accounts Payable. Alternatively, users can be determined via [Step User Exit 2: Determine processor of step](#). ReadSoft recommends this method as the best practice.

Workflow step conditions

Workflow step conditions are rules that determine whether a step is started or not. For example, in a typical two-step FI approval workflow, you may only want to have the second approval step performed if the value for an invoice is above a certain amount. You create conditions based on the values of certain fields, and can have more than one condition for a step.

Creating workflow step conditions

1. Go to [/COCKPIT/WI4](#).
2. Select a workflow step and double-click [Step conditions](#).
3. Enter **1** for **Sequence**.

This will be the first condition executed. Subsequent steps will be 2, 3, and so on.

4. Specify the **Structure** and **Internal field** that the condition is based on.

Note: If using the COSTCENTER field in the **Account assignments** table, the **From value** and **To value** must be 10 digits long. For example, for cost center 2500, enter 0000002500. Otherwise, the step condition will not activate.

5. Set **Inclusion/exclusion** to **Including** if you want the **From/To values** included in the step condition.
6. Set the **Comparative options** as appropriate.

For example, use **GE – Greater than or equal to from-value** to create a condition based on an amount exceeding the value in the **From value** field.

7. Enter values for **From value** and **To value**.

You only need a **To value** if using **BT – Between from-value and to-value**.

Note: Enter the values in SAP internal format. For example, for cost center 1000 enter 0000001000, for vendor 2500 enter 0000002500.

8. Select an **Opening bracket** or **Closing bracket**, if there are multiple steps conditions and you want to perform two or more conditions together before performing another.
9. If more than one condition is created, use **AND** or **OR** for the **Boolean operator**, as appropriate.

Example

To create a step condition for a gross amount exceeding 1000EUR or 1400USD, you need the following four items:

Setting	Value
Item/Sequence	1
Structure	HEADER (header data)
Internal field	GROSS_AMOUNT
Inclusion/exclusion	Including
Comparative options	GT – Greater than from-value
From value	1000

Setting	Value
Opening bracket/Closing bracket	Opening bracket
Boolean operator	AND
Setting	Value
Item/Sequence	2
Structure	HEADER (header data)
Internal field	CURRENCY
Inclusion/exclusion	Including
Comparative options	EQ – Same as from-value
From value	EUR
Opening bracket/Closing bracket	Closing bracket
Boolean operator	OR
Setting	Value
Item/Sequence	3
Structure	HEADER (header data)
Internal field	GROSS_AMOUNT

Setting	Value
Inclusion/exclusion	Including
Comparative options	GT – Greater than from-value
From value	1400
Opening bracket	Active
Boolean operator	AND
Setting	Value
Item/Sequence	4
Structure	HEADER (header data)
Internal field	CURRENCY
Inclusion/exclusion	Including
Comparative options	EQ – Same as from-value
From value	USD
Opening bracket/Closing bracket	Closing bracket
Boolean operator	[Blank]

Deleting workflows

Before deleting any workflows or workflow steps, ensure that no documents are currently active in them. You must either wait for the workflows for these documents to finish, or recall the documents from the workflow.

You can use /COCKPIT/1 to view which documents are currently active for specified workflows and workflow steps, by using the **Workflow ID** and **Workflow step ID** fields.

Other configuration tasks

- [User management](#)
- [Email templates](#)
- [One-time vendor fields in the Web Application](#)
- [Viewing PROCESS DIRECTOR documents](#)
- [Integrating with SAP Business Workflow](#)

For all other configuration topics, refer to the IMG reference in [Appendix A](#).



User management

SAP users, provided they have the appropriate [authorization](#), can access WORK CYCLE in both SAP and the Web Application using the regular username and password. In addition, you can create WORK CYCLE users who can access the Web Application. This is an easy way for non-SAP users to access and participate in workflows.

- [Creating users](#)
- [Importing users](#)
- [Creating user groups](#)
- [Using a substitute profile](#)
- [Define search help for workflow processors](#) (/COCKPIT/WI5)

Creating users

You can create WORK CYCLE users who can access the Web Application.

1. Go to [/COCKPIT/WUM](#).
2. In the **Workflow processor** field:
 - Enter a username if you want to specify one yourself.
 - Leave it blank if you want the system to generate one automatically (see the **User generation** setting in [/COCKPIT/WI6](#) for the methods of creating a username).
3. Click the  **Create user** icon.
4. Complete the details for the user and click the  **Continue** icon.

A password for the user is displayed. You can specify a default initial password in [/COCKPIT/WI6](#). If no default password is set, a random password is generated.

Tip: Activate the sending of emails to newly-created users. You can do this by enabling the **Create or delete** setting in [/COCKPIT/WI6](#).



Importing users from a file

You can import users into WORK CYCLE from a file (for example, CSV).

1. Write a function module to perform the import.

The function module must map and save the data to the `/COCKPIT/TWC_UMP` table (which contains the WORK CYCLE users).

You can copy `/COCKPIT/WC_MAP_IMP_EXAMPLE`, an example function, and modify it to your requirements. This example function works with CSV files.

2. Go to [/COCKPIT/WI6](#).
3. Enter the name of the function module you created in **Mapping module**.
4. Go to [/COCKPIT/WUM](#).
5. Click the  **Import user** icon.
6. Enter the filename to import and click .

Importing users from an LDAP directory

You can import users into WORK CYCLE from an LDAP directory.

1. Go to [/COCKPIT/WI27](#).
2. Map the fields you want to import between the LDAP directory (**Attribute name**) and WORK CYCLE (**Internal field name**).

If you want to modify any imported values, you can write your own function module and specify it here as well.

3. Go to SE38 and run /COCKPIT/WC_USER_UPDATE. This program imports the user data using the mapping table in [/COCKPIT/WI27](#).

Creating user groups

User groups can be created that can consist of:

- [WORK CYCLE users](#)
- SAP users
- Other user groups

1. Go to [/COCKPIT/WUM1](#).
2. Specify a **Work group** ID and a **Description**.
3. Select the group and double-click **Assigned processors**.
4. Specify the users and user groups that belong to this user group.

Using a substitute profile

When processors create substitutes, they can specify a substitution **Profile** to assign:

Detail Screen Substitution

Substitute for Jason NICHOLS

Substitute Helen Apps

☒ Personal substitution

Substitution data

Validity 13.05.2011 to 31.12.9999

Profile ☐ General substitution

☐ Substitution active

When documents are sent to workflow recipients, the substitutes who can view them can be filtered:

1. Go to [/COCKPIT/WI33](#).
2. Enter a substitute profile and save (you can only specify one).

Result

- Substitutes with the defined profile in /COCKPIT/WI33 are the *preferred* substitutes for the document (see **Rules**, below).
- Substitutes created in the Web Application are assigned to this profile automatically (there is no **Profile** field in the Web Application).

Rules

- If no profile is specified in /COCKPIT/WI33, the substitute **Profile** setting is ignored and documents are available for all substitutes.
- If a profile is specified in /COCKPIT/WI33, documents are available only to substitutes with this profile. If no substitutes have this profile, documents are available to substitutes with no profile specified.

Example

Settings

User 1: Jones

Substitute	Profile
Muller	PD
Schmidt	ALL

User 2: Smith

Substitute	Profile
Muller	[None]

/COCKPIT/WI33

Profile
PD

Action

Two separate documents are sent to Jones (100) and Smith (200).

Result

Substitute	Available documents
Muller	100, 200
Schmidt	[None]

Email templates

Templates are used for workflow emails, which are sent at [various times](#), such as when a workflow is started, is overdue, and so on. WORK CYCLE comes with its own templates, and you can also create your own.

- [Creating custom email templates](#)
- [Creating custom HTML email templates](#)
- [Built-in email templates](#)
- [Email text variables](#)

Creating email templates

Plain text or HTML?

Before creating email templates, you must first decide whether the emails will be plain text or HTML (you cannot use both).

With HTML emails, URLs can be displayed as more user-friendly hyperlinks rather than as long URLs. Header, line-item, and account assignment data can also be displayed in HTML emails (and not in plain text emails).

1. Go to [/COCKPIT/WI30](#).
2. Under **Format**, select either **Plain text** or **HTML**.

Creating templates

There are two steps to creating email templates:

1. Create the text to use in SE61.

Use plain text. Even if you have activated HTML emails, the text will be formatted as HTML before being sent. You specify the styles in the [HTML start](#) template.

There are [built-in templates](#) that you can use or copy to your own templates and modify.

There are [variables](#) that you can use in the text (for example, &WEB_CYCLE_USER_NAME& to insert the recipient's name).

Note: The Document class in SE61 must be set to General text.

2. Activate the use of the text in either the workflow step configuration (for workflow starts) or the general workflow text configuration.

For plain text emails, no further configuration is required. For HTML emails, please refer to [Creating HTML email templates](#).

Built-in email templates

PROCESS DIRECTOR Accounts Payable comes packaged with the following email templates that you can use or copy to your own templates and modify.

Action	Built-in template	Activated in*
Starting a workflow	/COCKPIT/WEB_CYCLE_START (for plain text emails) /COCKPIT/WEB_CYCLE_TEMPL_HTM (for HTML emails)	/COCKPIT/WI3
Recalling a document	/COCKPIT/WEB_CYCLE_STOP	/COCKPIT/WI9
Reminders for overdue workflows	/COCKPIT/WEB_CYCLE_REMINDER	
Substitute taking over processing	/COCKPIT/WEB_CYCLE_TAKEOVER	
Collective email	/COCKPIT/WEB_CYCLE_COLLECT	
Starting a workflow – email to active substitutes	/COCKPIT/WEB_CYCLE_SUBST	
Answering a query	/COCKPIT/WEB_CYCLE_ANSWER	
Sending a query	/COCKPIT/WEB_CYCLE_QUERY	
Forwarding a workflow	/COCKPIT/WEB_CYCLE_FORWARD	

* The subjects of the emails are specified in the same transactions.

Email text variables

There are various variables (aliases) that you can use in the text (for example, &WEB_CYCLE_USER_NAME& to insert the recipient's name). The following variables are available:

Variable	Description
&SENDER_EMAIL&	The email address of the person who starts the workflow, as saved in the /SU01.
&SENDER_PHONE&	The phone number of the person who starts the workflow, as saved in the /SU01.
&SENDER_FAX&	The fax number of the person who starts the workflow, as saved in the /SU01.
&SENDER_NAME&	The full name of the person who starts the workflow, as saved in the /SU01.
&SENDER_DEPARTMENT&	The department of the person who starts the workflow, as saved in the /SU01.
&SENDER_FUNCTION&	The function of the person who starts the workflow, as saved in the /SU01.
&SENDER_COMPANY&	The company of the person who starts the workflow, as saved in the /SU01.
&WEB_CYCLE_DESCRIPTION&	The description of the workflow, as saved in /COCKPIT/WI2.
&WEB_CYCLE_STEP_DESCRIPTION&	The description of the workflow step, as saved in /COCKPIT/WI3.

Variable	Description
&HEADER-x	The name of the PROCESS DIRECTOR Accounts Payable header field, where x is the field ID in the /COCKPIT/THDR table.
&VENDOR-x	The name of the vendor, where x is a field ID from the BAPI1008_4 table.
&SY-x	The name of a system variable, where x is a field ID of the SYST structure.
&WEB_CYCLE_SINGLE_DOCUMENT_LINK&	The URL of the Web Application to a single document.
&WEB_CYCLE_SINGLE_SIGN_ON_LINK&	The URL of the Web Application logon page.
&WEB_CYCLE_DOCUMENT_LIST_LINK& &WEB_CYCLE_DIRECT_DOCUMENT_LINK&	The URL of the Web Application to the list of documents to approve. Note: Two aliases/variables exist to provide backward compatibility with previous versions.
&WEB_CYCLE_SUBST_DOC_LIST_LINK&	The URL of the list of documents from a person of whom another person is a substitute.
&WEB_CYCLE_USER&	The ID of the workflow processor.
&WEB_CYCLE_USER_NAME&	The full name of the workflow processor.
&WEB_CYCLE_SUBST_NAME&	The full name of a substitute.
&DUE_DAYS&	The number of days remaining for the document to be approved.

Variable	Description
&MOBILE_APPROVE&	The mailto URL to approve the document.*
&MOBILE_REJECT&	The mailto URL to reject the document.*
&MOBILE_NOTE&	The mailto URL to add a note the document.*

* MOBILE APPROVAL must be active for the link to appear in the email.

Variables for HTML emails

The following variables can only be used in HTML emails, not in plain text emails.

If no document data exists in the line item, account and multi-account assignment tables, these tables are not displayed in emails.

Variable	Description
&HEADER_DATA&	Displays the document header data, as a table.
&ITEM_DATA&	Displays the document line-item data, as a table.
&ACCOUNT_DATA&	Displays the document account assignment data, as a table.
&MULTI_ACC_ASS_DATA&	Displays the (MM) document account assignment data, as a table. Note: If Add multi acc. ass. to items is active in /COCKPIT/WI30 , the account-assignment data is included in the line-item table (&ITEM_DATA&).
&WORKFLOW_HISTORY&	Displays the current log of the workflow (basically the same information that is presented in the workflow status in the SAP GUI and in the Web Application). It also includes any notes that have been created in WORK CYCLE.

Variable	Description
	Note: The workflow history table is not included in emails sent for the first step of workflows.
&MOBILE_BUTTONS&	Displays the Approve , Reject and Note buttons for MOBILE APPROVE. Note: MOBILE APPROVAL must first be active for the workflow step (/COCKPIT/MAI2).

- To specify which fields appear in each of these tables, see </COCKPIT/WI32>.
- To specify how many fields per row are displayed, see the **Fields number per row** setting in </COCKPIT/WI30>.

Creating HTML email templates

To create an email template in HTML format:

1. Go to </COCKPIT/WI30>.
2. Under **WORK CYCLE email type**, select **HTML**.
3. Specify the HTML code to use for the [HTML Start, HTML End](#) and **MOBILE APPROVAL links**.
4. Specify the [display names for the links to the Web Application](#).
5. Under **Fields number per row**, enter the number of fields to appear in each table row.

Example showing four fields per row:

Items						
Item 1						
Gross	0,00	Item 1	Net amount	0,00	Purch.doc.	4500000016
Quantity	0,000					
Item 2						
Gross	0,00	Item 2	Net amount	0,00	Purch.doc.	4500000016
Quantity	9,456					

6. Select **Add Multi acc. ass. to items** to include multi-account assignment fields (for MM documents) in the line-item table. If not selected, multi-account assignment fields are displayed as a separate table.

7. If MOBILE APPROVAL is active for a workflow step, only one field is displayed per table row and the **Field numbers per row** setting *is not* used. By selecting **Ignore MOBILE APPROVAL**, the **Field numbers per row** setting *is* used.

Default table display for MOBILE APPROVAL, with only one field per row:

Items	
Item 1	
Gross	0,00
Item	1
Net amount	0,00
Purch.doc.	4500000016
Quantity	0,000
Item 2	
Gross	0,00
Item	2
Net amount	0,00
Purch.doc.	4500000016
Quantity	9,456

8. Specify the [fields that are displayed in HTML emails](#).
9. Specify the [email Background image](#).

HTML emails - Start and end code

When creating [HTML email templates](#), you must specify the start and end of the HTML code (**HTML start** and **HTML end** settings).

PROCESS DIRECTOR Accounts Payable comes with templates you can use for both of these: /COCKPIT/HTML_START and /COCKPIT/HTML_END.

If you want to create your own templates, you should copy the code from these default templates to your own files. The main thing to change is the styles, to change the appearance of the HTML emails.

Background image filename

The [background image](#) filename that appears in the /COCKPIT/HTML_START template cannot be changed: backgrnd.gif. However, the image file [you upload and use from the SAP repository](#) can be any filename. It does not have to be backgrnd.gif. PROCESS DIRECTOR Accounts Payable links your image with this filename automatically.

HTML emails – Background images

You can add a background image to your HTML emails. For example, the image could be a bar extending across the top of the email, a company logo, or an image/color as a background to the entire email.

If no background image is specified, the default (`backgrnd.gif`) is used:

To set a background image:

1. [Upload the image you want to use to the SAP Web Repository](#).
2. Go to [/COCKPIT/WI30](#).
3. In **Background**, enter the ID of the image you uploaded.

Enter the image ID in the repository, not the original filename.

There is no requirement for the image filename. It does not have to be `backgrnd.gif`, as it appears in the HTML start template. PROCESS DIRECTOR links your image with this filename automatically.

Note: Not all email programs (including some versions of Microsoft Office) support background images for HTML emails. In this case, the background image appears as an email attachment.

Disabling background images

To disable the use of background images, check the **Disable email background** option in [/COCKPIT/WI30](#).

Adding an image to the SAP Web Repository

To add an image to the SAP Web Repository, for use as a [background image to an HTML email](#):

1. Go to `/SMW0`.
2. Select **Binary data for WebRFC applications** and click the **Find** button.
3. Click the **Execute** button.
4. Click the **Create** button.
5. Enter an **Obj. name** and **description**.
6. Click **Import**.
7. Select the image file and click **Transfer**.

Note: There is no requirement for the image filename. It does not have to be `backgrnd.gif`, as it appears in the HTML start template. PROCESS DIRECTOR Accounts Payable links your image with this filename automatically.

8. Specify the **Development class** and click **Save**.

One-time vendor fields in the Web Application

Workflow processors can enter and save information about one-time vendors, for which there is no master record. For WORK CYCLE users in the SAP GUI, users can add this information on the Vendor tab. For WORK CYCLE users in the Web Application, you must specify which fields are displayed. However, the Name (NAME1) and City (ORT01) fields always appear—you do not need to add them here.

1. Go to [/COCKPIT/WI29](#).
2. Click the **Display/Change** button and click **New entries**.
3. Specify a **Vendor** number only if the field should be displayed for that vendor only.
4. Enter the PROCESS DIRECTOR **Field name**.
5. Under **Display**, specify whether the field is displayed (**Normal field**), if a value must be entered (**Mandatory field**), is read-only (**Only display**), or hidden (**Hide**).
6. Specify the **Priority** number. This determines the row order in which the fields are displayed (lowest to highest value).
7. Save your changes.

Viewing PROCESS DIRECTOR documents

In the WORK CYCLE Web Application, an additional tab called **PD documents** can be displayed for members of a [specific user group](#). In this tab, users can select and view any PROCESS DIRECTOR document, that is, not just ones sent to these users in a workflow.

To display the **PD documents** tab:

1. Go to [/COCKPIT/WI25](#) and specify the user group for whom this tab is displayed.
2. Go to [/COCKPIT/WI26](#) and specify which fields to have as the selection criteria.

Creating field statuses

1. Go to [/COCKPIT/C23](#).
2. Add a new entry.
3. Enter a name/ID in **Field status**.
4. Under **Field status identification**, specify if header fields, line-item fields, and/or account assignment fields should be made read-only.

Checking **No account assignment line with MM invoices** hides the account assignment fields section for FI items in MM documents.

5. Double-click **Characteristic value of status**.
6. Specify the individual fields that will be hidden, read-only, mandatory, or normal.

Note: Mandatory fields here prevent the document from being saved if the field has no value.

7. Save the new field status
8. Go to [/COCKPIT/WI3](#).
9. Open the desired workflow step and enter the name of the **Field status** you created.

Note: The field status is only activated for the selected workflow step, and not for PROCESS DIRECTOR. Field statuses for PROCESS DIRECTOR are activated in [/COCKPIT/C24](#).

10. Save the change.

Example

Objective: To make all header fields read-only, except for:

Header field	Display setting
Business area	Normal field (a field whose value can be changed)
Assignment	Hidden
Reference document	Mandatory

Step 1: Make all header fields read-only.

Field status identification

☒ Head. data can only be displayed

☐ Display invoice items only (no entry)

☐ Only display account assignment (no entry)

☐ No acc. assignment line with MM invoices

Screen variants

Invoice items

Account assignments

PO account assignment

PO data

Field status

TRAINING

Field status identification

☒ Head. data can only be displayed

☐ Display invoice items only (no entry)

☐ Only display account assignment (no entry)

☐ No acc. assignment line with MM invoices

Screen variants

Invoice items

Account assignments

PO account assignment

PO data

Ia. Select which field types should be read-only

Ib. Double-click to select field-by-field statuses

Step 2: Specify the three fields that will not be read-only.

Characteristic value of status

Structure	Internal field name	Display
HEADER Hdr. ...	BUS_AREA	Normal field
HEADER Hdr. ...	ALLOC_NMBR	H Hide
HEADER Hdr. ...	REF_DOC_NO	M Mandatory field
		Normal field
		Normal field
		Normal field

Ic. Here, we create individual field exceptions to the general rule we just set.

31

Result:

Before:

Training test doc type / 20008 Victoria Office Equipment Ltd., Bristol Bal. 0.00 GBP

General Invoice Taxes, rates Vendor Others

Vendor: 20008 Victoria Office Equipment Ltd., Bristol

Document date: 25.05.2010

Posting date:

Reference:

GL account no:

Service entry:

Document no:

Business area:

Gross amount: 541.43

Net amount: 460.79

Company Code: 2000 Currency: GBP

Document type: RE Pay meth: Pay Meth. Ref:

Gen. bank ind:

Part bank type:

PayReference:

Unpl. del. csts: 0.00

Assignment:

After:

All fields are read-only, except for:

Mandatory

Editable/"Normal"

Hidden

Training test doc type / 20008 Victoria Office Equipment Ltd., Bristol Bal. 0.00 GBP

General Invoice Taxes, rates Vendor Others

Vendor: 20008 Victoria Office Equipment Ltd., Bristol

Document date: 25.05.2010

Posting date:

Reference: X

GL account no:

Service entry:

Document no:

Business area:

Gross amount: 541.43

Net amount: 460.79

Company Code: 2000 Currency: GBP

Document type: RE Pay meth: Pay Meth. Ref:

Gen. bank ind:

Part bank type:

PayReference:

Unpl. del. csts: 0.00

Assignment:

Integrating with SAP Business Workflow

This tutorial shows you how set up SAP Business Workflow integration for WORK CYCLE. This means that if a WORK CYCLE workflow step is sent to an SAP user, it also appears as a new work item in the **Workflows** category of the receiver's SAP Business Workplace Inbox (SAP transaction SBWP). With a little [extra configuration](#), the WORK CYCLE step can also be accessed from the Universal Worklist (UWL).

Overview

1. Go to SAP transaction SWDD.
2. [Create a new workflow definition](#)—initial setup.
3. [Create a Container element](#)—this is what is responsible for mapping a WORK CYCLE workflow step to an SAP Business Workflow step.
4. [Set up the workflow start event](#)—this lets WORK CYCLE trigger an SAP Business Workflow when a WORK CYCLE workflow step is started.
5. [Add a Container operation to delete superfluous attachments](#)—since any actual step processing occurs in WORK CYCLE, we want to display only the work item itself and remove any extraneous attachments that might be confusing. By selecting the work item, the user will click through to WORK CYCLE.
6. [Add an activity for the WORK CYCLE workflow step](#).

7. [Activate your workflow definition](#)—this finalizes the configuration and takes it into production.


Additional information

As a supplement to the information in this topic, Ginger Gatling's SDN eLearning session "[Building a Workflow from Scratch](#)" (requires SDN login) provides a tutorial-style introduction to developing SAP Business Workflows.

Creating a new workflow definition

1. In SWDD, select the menu path **Workflow > New**, then save.


A popup appears, prompting you to enter an abbreviation and name for the workflow definition:

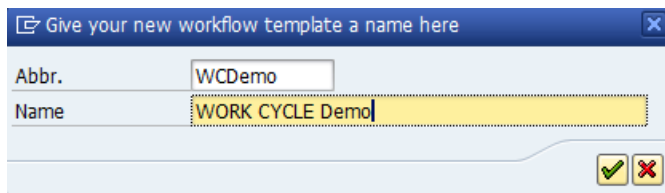

The dialog box has a title bar that says "Give your new workflow template a name here". It contains two input fields: "Abbr." with the value "WCDemo" and "Name" with the value "WORK CYCLE Demo". At the bottom right, there are two buttons: a green checkmark and a red X.

2. Confirm.

Another popup appears, asking you to create an Object Directory entry for the workflow definition:

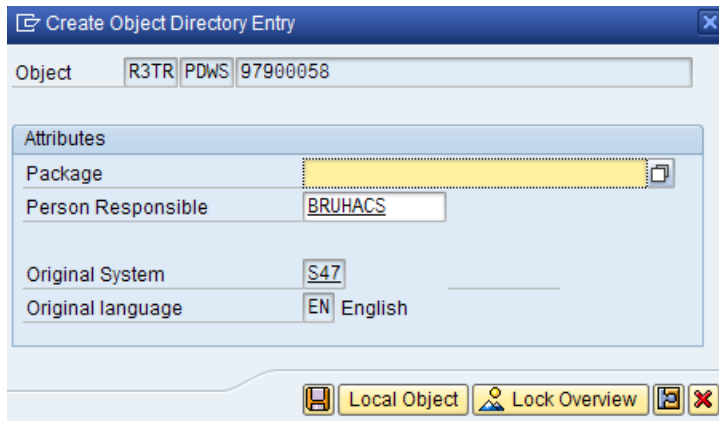


The dialog box has a title bar that says "Create Object Directory Entry". It contains an "Object" field with the value "R3TR PDWS 97900058". Below this is an "Attributes" section with several fields: "Package" (empty), "Person Responsible" (BRUHACS), "Original System" (S47), and "Original language" (EN English). At the bottom, there are four buttons: "Local Object", "Lock Overview", and two small icons (a document and a red X).

3. Use search help to pick a package name, then save.


Creating a container element

1. Select the **Workflow Container** tab and double-click the item **<Double-Click to Create>**:

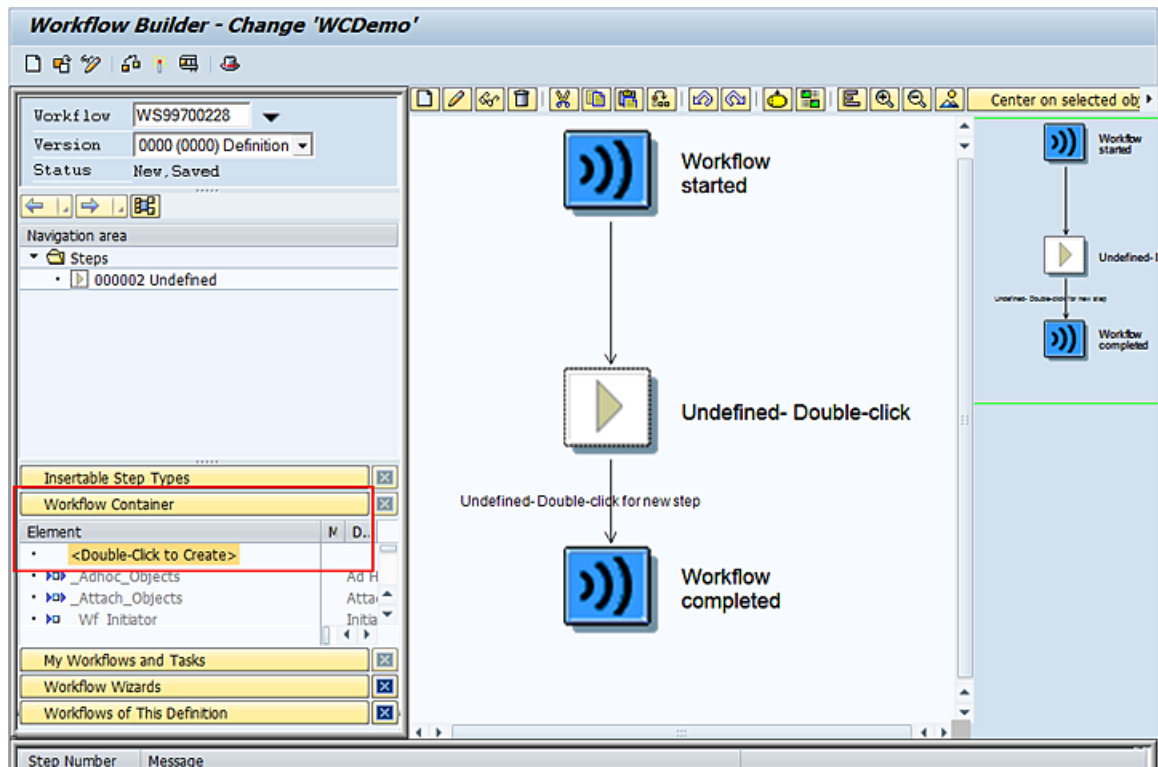

The **Change Container Element** popup appears.

2. Enter an element, name and description and the object type `/COCKPIT/W`. Your screen should look like this:

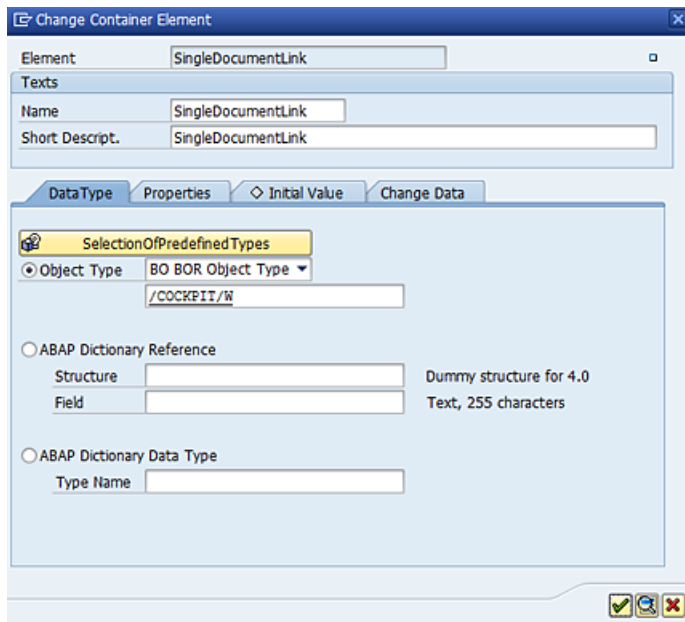

Change Container Element

Element: SingleDocumentLink

Texts

Name: SingleDocumentLink

Short Descript.: SingleDocumentLink

Data Type Properties Initial Value Change Data

SelectionOfPredefinedTypes

Object Type: BO BOR Object Type

/COCKPIT/W

ABAP Dictionary Reference


Structure: Dummy structure for 4.0

Field: Text, 255 characters

ABAP Dictionary Data Type

Type Name:

- Click the tab **Properties** and check the checkbox **Parameter settings > Import**.

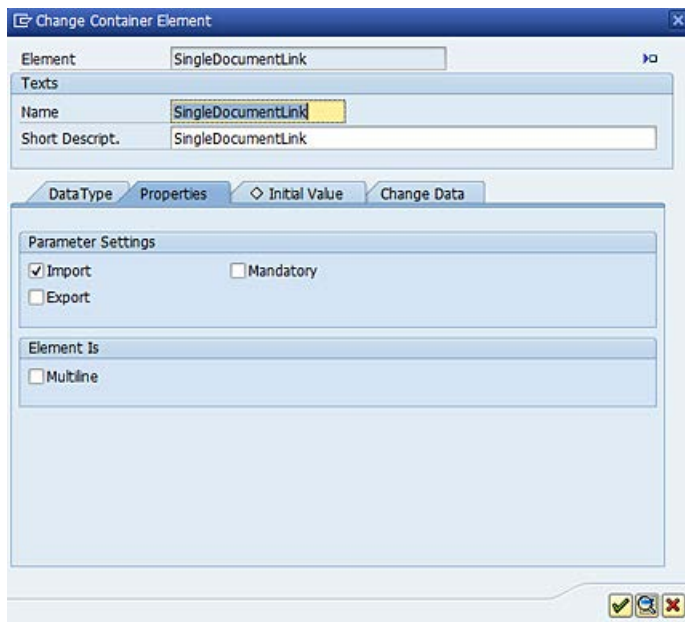

Change Container Element

Element: SingleDocumentLink

Texts

Name: SingleDocumentLink

Short Descript.: SingleDocumentLink

Data Type Properties Initial Value Change Data

Parameter Settings

☒ Import ☐ Mandatory


☐ Export

Element Is

☐ Multiline


- Confirm.


Setting up the workflow start event

- 1. Click the toolbar button .
- 2. Select the tab **Version-Independent (Task) > Start Events** and add these settings:


Required settings	
Object Category	BO BOR Object Type
Object Type	/COCKPIT/W
Event of the object	STARTED


Your screen should look like this:

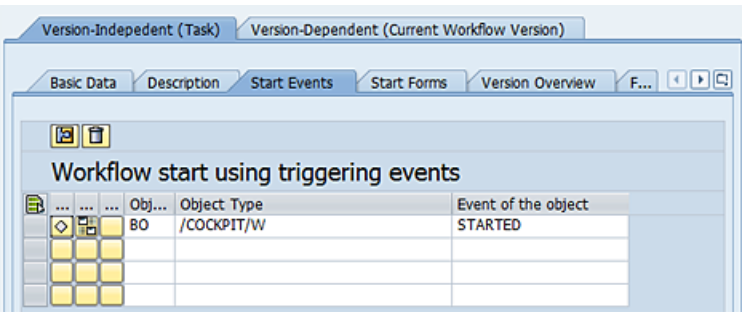

- 3. Then activate the event linkage by clicking the button . You will be prompted for a customizing request.

Note: In some customer implementations, the activation may need to be executed manually in every client and system.




- 4. Next, configure the event binding by clicking the button . The **Change Binding for Workflow popup** appears.
- 5. Drag and drop the Event container field `_EVT_OBJECT` onto your new workflow container `SingleDocumentLink`, as shown here:

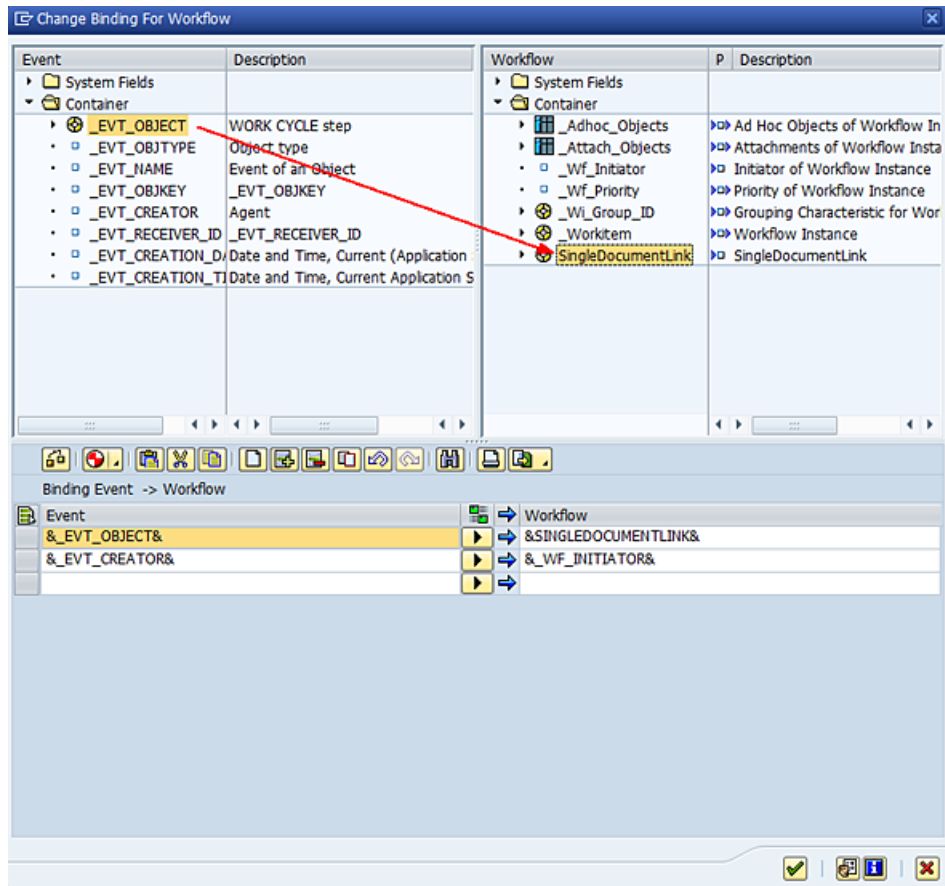

If an event is raised, the instance of the object which raised the event is available in the Event container field `_EVT_OBJECT`. This field must be copied into the corresponding field in the Workflow Container. This is the field `SingleDocumentLink`, which was created in the workflow step. And it is the only available field for event binding, since it is the only field marked as an Input field.


6. Confirm.


Now you can specify how the work item recipients will be determined.

1. Click the toolbar button . The **Maintain Agent Assignment** dialog appears.
2. Click the toolbar button .
3. Select the radio button **General task** and confirm. This setting allows all SAP users as possible work item recipients.
4. Finally, activate the assignment by clicking the toolbar button .

Adding a container operation

Since you do not need to transport any attachments from PROCESS DIRECTOR into SBWP, you can simply delete them from the workflow.

- 1. Click the toolbar button  to return to the overview.
- 2. Double-click on **Undefined- Double-click** as shown here:

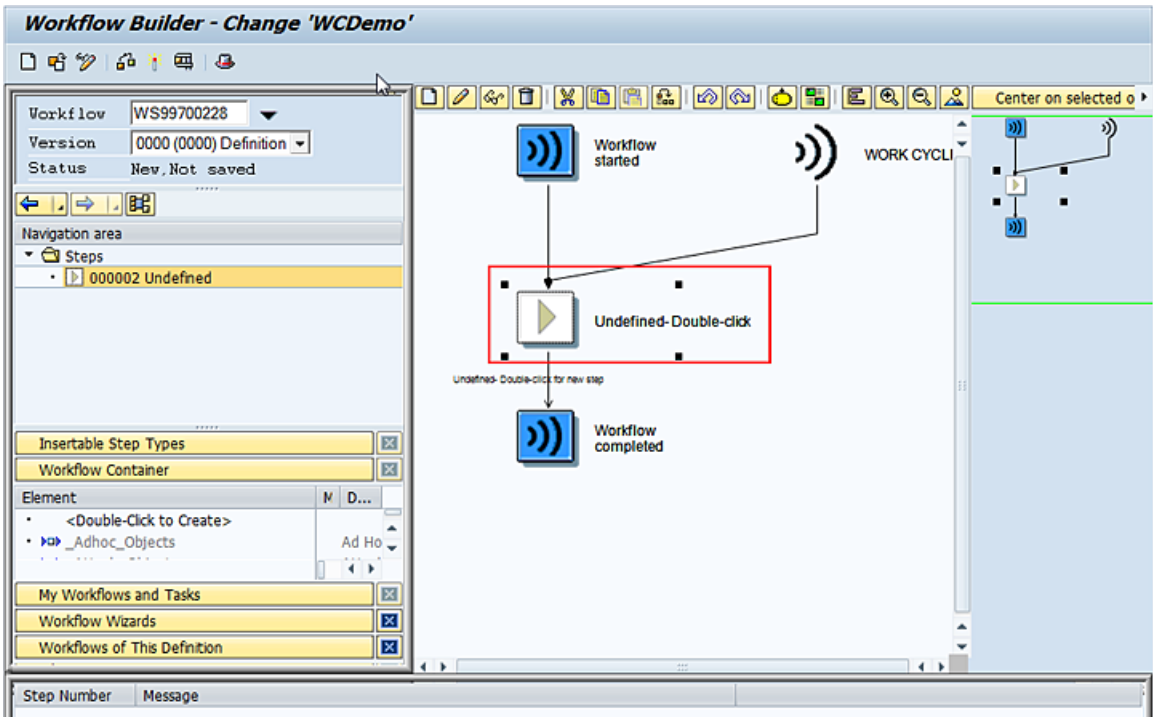

The **Step Selection** popup appears.

- 3. Double-click the step type **Container Operation**.
- 4. Enter these settings in the **Control** tab:

Required settings	
Step name	Enter Delete useless attachments.
Outcome name	Enter Attachments deleted.
Step not in workflow log	Check this checkbox.

Required settings	
Result element	Use search help to pick <code>_Attach_Objects</code> .

- Confirm.

Your screen should look like this:

Container operation 000004

Control Properties Change Data

Step Name Delete useless attachments

Outcome name Attachments deleted

☒ Step not in workflow log

Operation

Result Element _Attach_Objects Attachments

Assignment = Assign (contents of table are deleted first)


Expression

Operator Assignment

Expression


Adding an activity for the WORK CYCLE workflow step

- Right-click **Workflow completed**, then select the context menu item **Create...** :

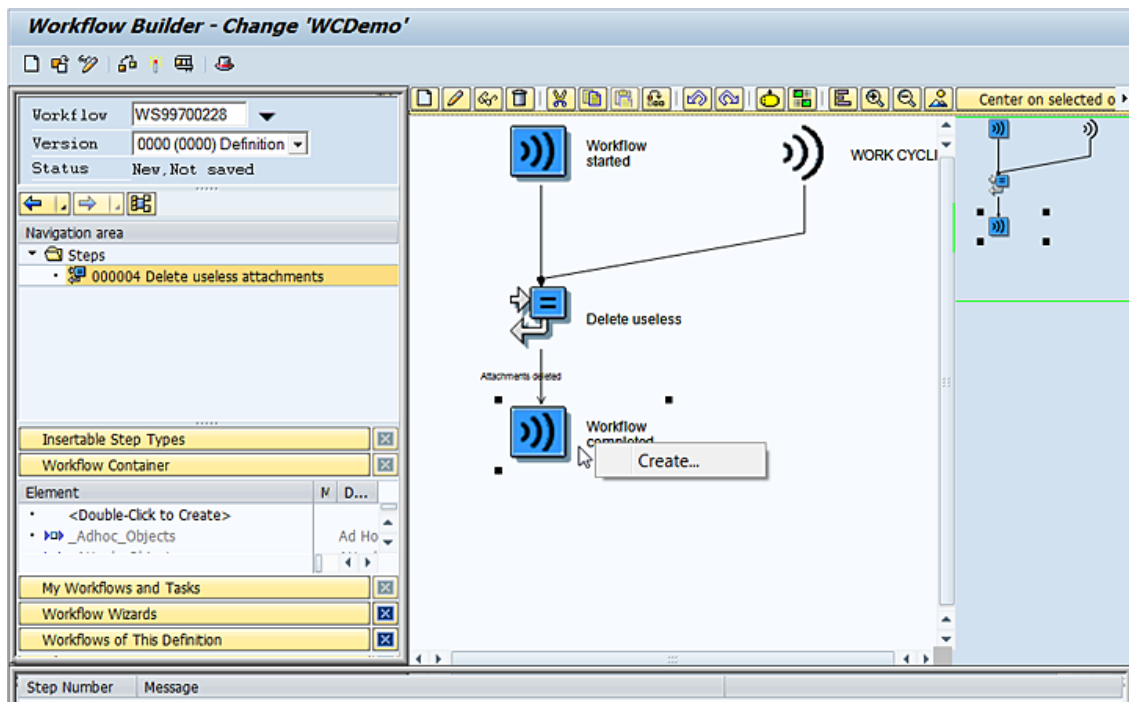

The **Step Selection** popup appears.

- 2. Double-click the step type **Activity**.
- 3. In the **Control** tab, open the **Task** dropdown menu and then select **Create task**:

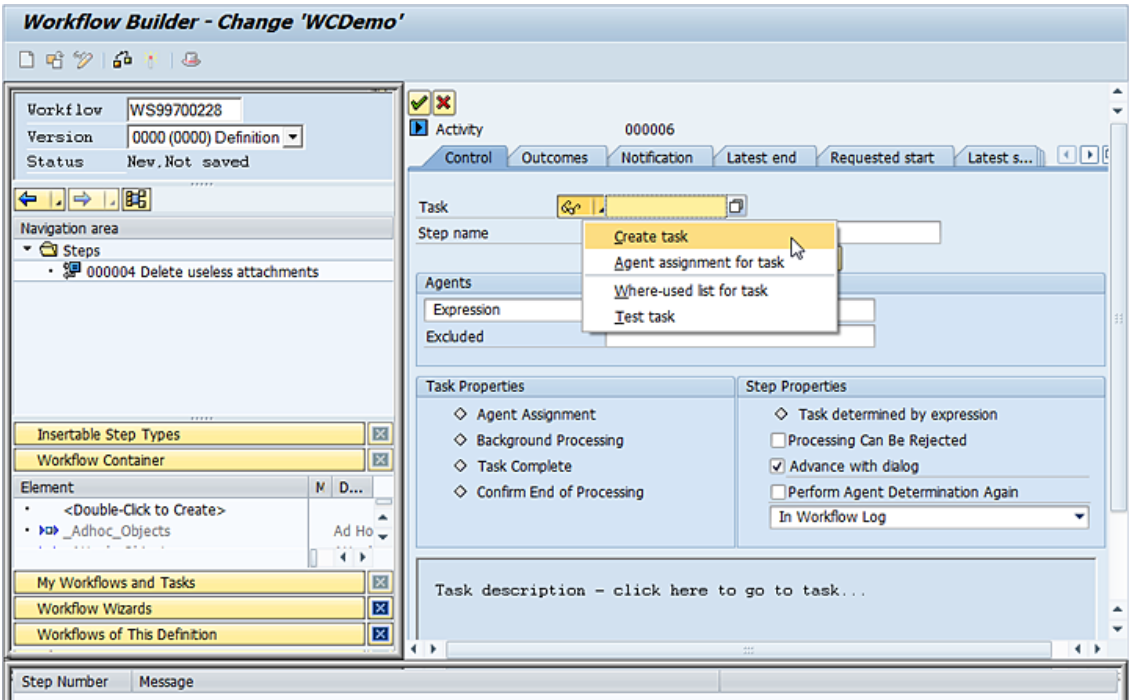

The task creation dialog appears.

- 4. In the **Basic Data** tab, enter these settings:

Required settings	
Abbr	PDWCProcess
Name	WORK CYCLE process
Object Category	BO BOR Object Type
Object Type	/COCKPIT/W

Required settings	
Method	DISPLAY

Your screen should now look like this:

Standard Task: Change

Standard task

99700117

PDWCPProcess

Name

WORK CYCLE process

Package

\$TMP

Appl. component

Basic data

Description

Container

Triggering events

Terminating

Name

Abbr.

Name

Work item text

Release status

PDWCPProcess

WORK CYCLE process

Not defined

Object method

Object Category

Object Type

Method

BO BOR Object Type

/COCKPIT/W

DISPLAY

Display object

☐ Synchronous object method

☒ Object method with dialog

You can also add some documentation for the task in the **Description** tab (optional).


5. Next, you need to ensure that the work item will disappear from the Workplace if it has been canceled, retracted or finished from within PROCESS DIRECTOR Accounts Payable or WORK CYCLE. To configure this, select the **Terminating events** tab and define a terminating event:


Required settings	
Element	_WI_OBJECT_ID
Object Category	BO BOR Object Type
Object Type	/COCKPIT/W

Required settings	
Event	FINISHED


6. Save your settings.
7. The **Create Object Directory Entry** popup appears and prompts you to assign a package. Enter an appropriate Z package.

Warning: Be sure to double-check your work before returning to the activity definition, as then, you will no longer be able to edit the task.

8. Click the SAP GUI toolbar button  to return to the activity definition dialog.
9. You will receive a proposal for a binding:

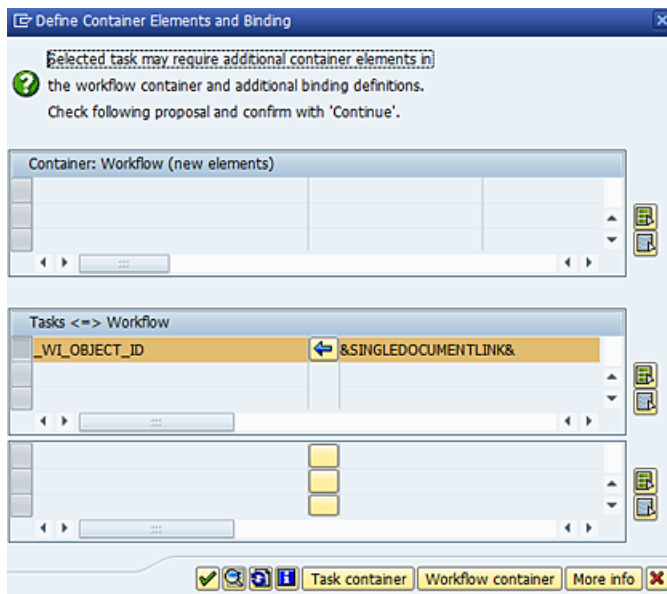


10. Confirm.
11. Now use the search help to select an expression for the **Agents** assignment:

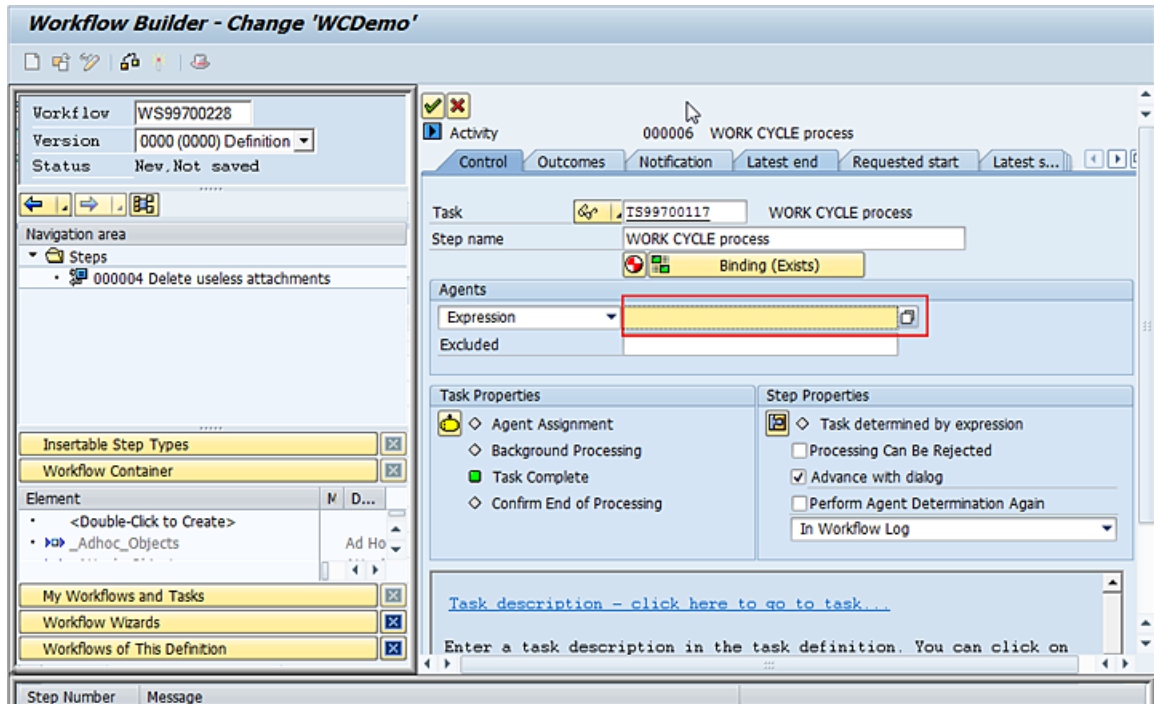




The **Expression** for step agent popup appears.


12. Select the expression **Container > SingleDocumentLink > User**, as shown here:

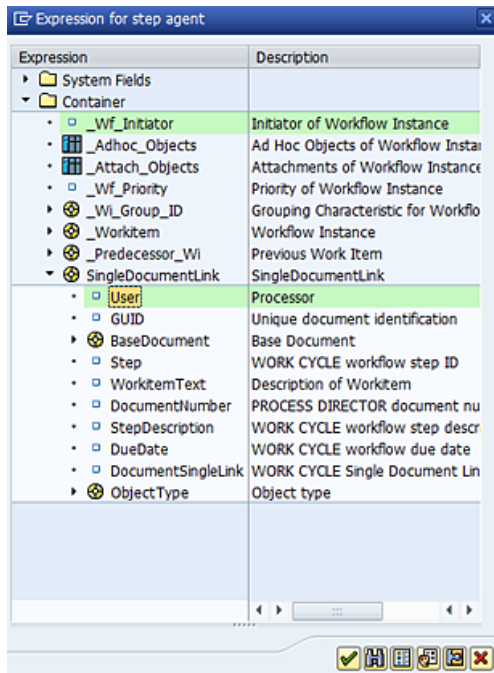


13. Confirm.

14. Specify the agent assignment by clicking the button  in **Task Properties**. The **Maintain Agent Assignment** dialog appears.
15. Click the toolbar button .
- The **Task** popup appears.
16. Select the radio button **General Task** and confirm.
17. Return to the Workflow Builder by clicking the SAP GUI toolbar button  twice.

Activating the workflow definition

Click the toolbar button  to generate and activate the runtime version of the workflow.


Your screen should now look like this:

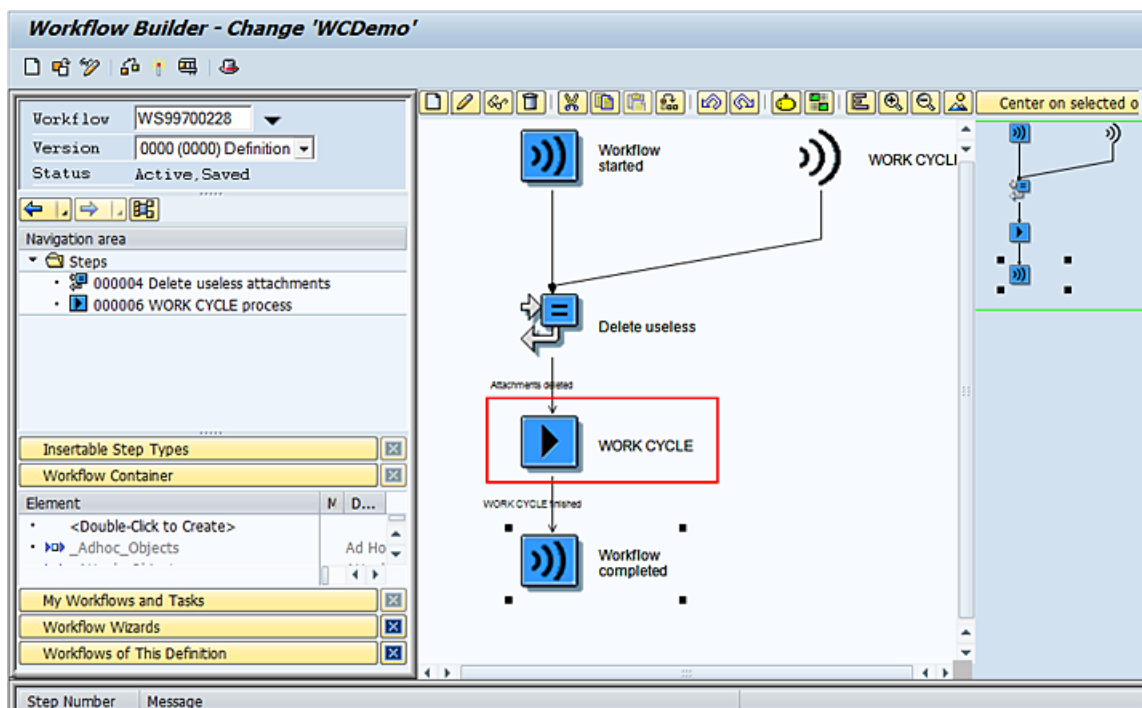


Prerequisites for UWL

SAP Business Workflow tasks can also be accessed via the SAP Universal Worklist (UWL). To access WORK CYCLE workflows from UWL, in addition to the [steps described for integrating WORK CYCLE with SAP Business Workflow](#), you must also create a binding from the workflow container to the task container in order that the WORK CYCLE URL can be accessed from UWL. For information on configuring UWL, refer to the SAP documentation.

1. Go to SWDD.
2. Double-click the [WORK CYCLE activity that you created previously](#).

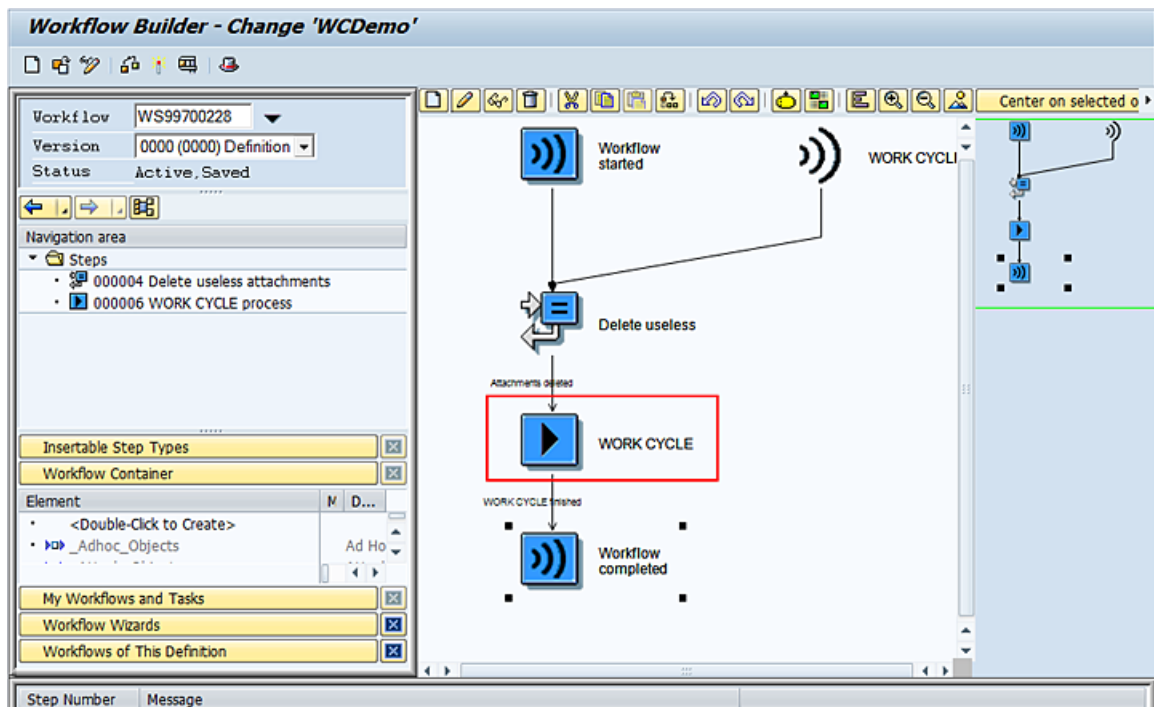

3. In the **Task** field, double-click the task number to open the task details.

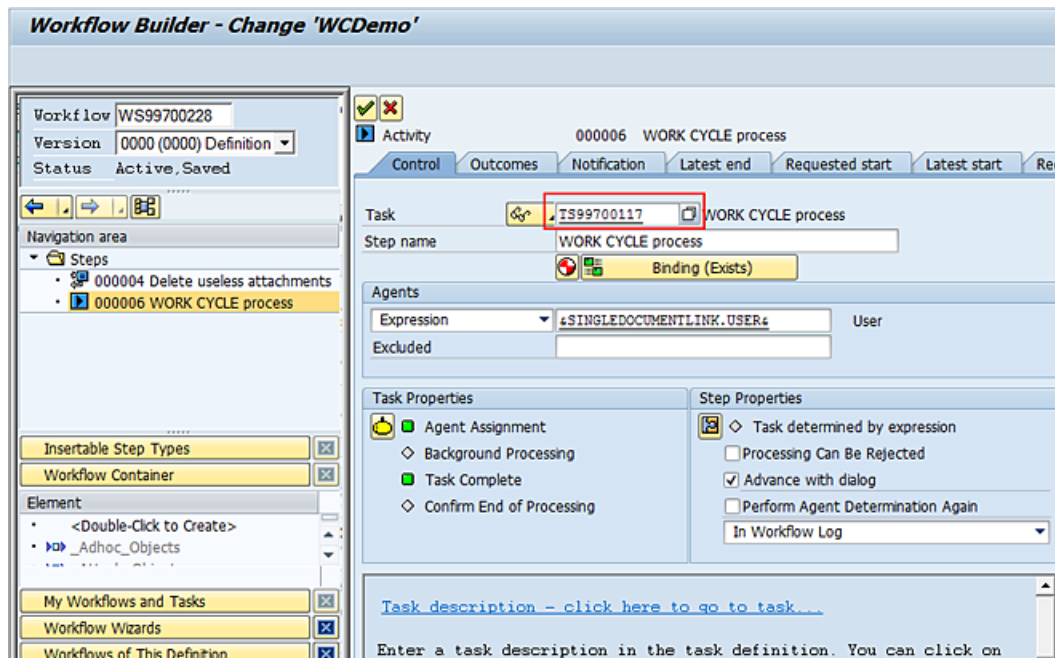

4. Select the **Container** tab or the **Container** button on the toolbar (depending on your SAP version).
5. In change mode, click the **New** button on the tab toolbar.
6. Select **ABAP Dictionary Reference** and enter the structure `/COCKPIT/SWC_DUMMY` and the field `URL`. Your screen should look like this:

Standard Task: Change

Standard task: 99700117 PDWCPProcess
 Name: WORK CYCLE process
 Package: \$TMP Appl. component: _____

Basic data | Description | **Container** | Triggering events | Terminating

Expression | Description | Initial value
 • Ad Hoc Objects | Ad Hoc Objects of Workflow Instance | < Not Set >

Change Container Element


Element: SingleDocumentLink

Texts
 Name: SingleDocumentLink
 Short Descript.: SingleDocumentLink

DataType | Properties | **Initial Value** | Change Data

SelectionOfPredefinedTypes
☐ Object Type
☒ ABAP Dictionary Reference
 Structure: /COCKPIT/SWC_DUMMY
 Field: URL
☐ ABAP Dictionary Data Type
 Type Name: _____

7. Save and go back.
8. In the Activity screen, click the **Binding (Exists)** button.
9. Expand the **SingleDocumentLink** workflow container on the left-hand side and drag and drop the **DocumentSingleLink** field to the **SingleDocumentLink** task container on the right-hand side.

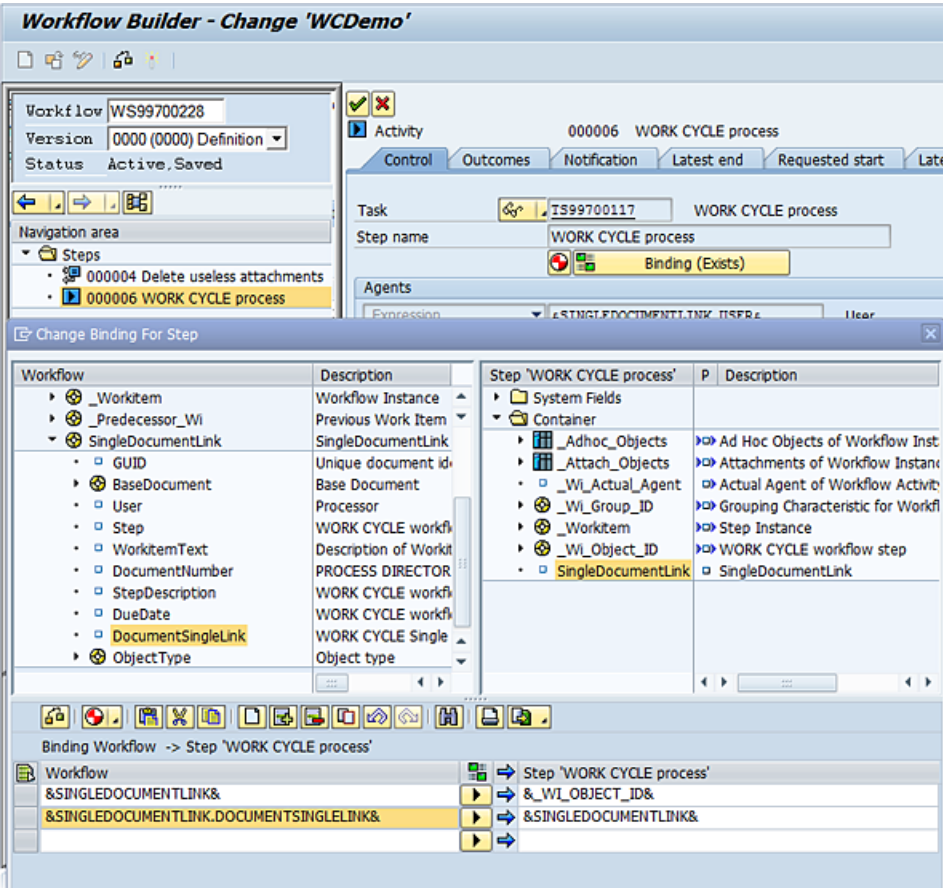

A new entry is added in the table **Binding Workflow -> Step 'WORK CYCLE process'**.

10. Confirm and save.

Programs and functions

WORK CYCLE comes with a series of programs and functions that you can use.

Name*	Description
<u>ARCHIV_NOTE_LATE</u>	Archives notes that have not been archived normally.
<u>ARCHIV_WCLOG_REPAIR</u>	Archives workflows that have not yet been archived.
<u>DUE_DATE_CHECK</u>	Send reminder emails for overdue workflows, as well as collective emails.
<u>WC_CHK_DEL_USRS</u>	Checks whether a user who no longer exists, is still assigned to user groups or workflow steps, or as a substitute.
<u>WC_DEBUG</u>	Enables the creation of log entries for PROCESS DIRECTOR and WORK CYCLE RFC calls, including those by the Web Application and User Exits.
<u>WC_RFC_LOG</u>	Displays all the RFC log entries (a record of RFC calls made by the Web Application).
<u>WC_SET_NOT_ARCHIVED</u>	Resets the ARCHIVED flag so that the workflow can be archived again.
<u>WC_UMA_PASSWD_INIT</u>	Resets passwords for multiple users.
<u>WC_USER_UPDATE</u>	Import users from an LDAP directory.
<u>WC_WEB_LOGGING</u>	Records all RFC calls made by the Web Application. Used in conjunction with WC_DEBUG.

Name*	Description
<u>XPRA V720 SP0</u>	Required to enable searching for WUM users by email address after upgrading to PROCESS DIRECTOR 7.2 from a previous version. Also required in order that the user-type independent search help on workflow start functions correctly after upgrade.

* All programs and functions are contained within the /COCKPIT/ namespace.

ARCHIV_NOTE_LATE

Archives notes that have not been archived normally.

The program archives internal notes and all other notes that have not yet been archived with workflow. All notes relevant to the workflow are already automatically archived when terminating the workflow. Notes that have been entered after the termination of the workflow and internal notes (are not displayed in the workflow) can be archived with this program.

Workflow notes can be created by workflow recipients in WORK CYCLE and the Web Application and are visible there, while internal notes can be created only in /COCKPIT/1 and are not visible in WORK CYCLE or the Web Application.

ARCHIV_WCLOG_REPAIR

Archives workflows that have not yet been archived. Sometimes the archiving can fail (for example, a wrong configuration could result in the archive being offline).

If this program also fails to archive your workflow, follow this procedure:

11. Run [/COCKPIT/WC_SET_NOT_ARCHIVED](#).




This program resets the **ARCHIVED** flag so that the workflow can be archived again.

12. Run /COCKPIT/ARCHIV_WCLOG_REPAIR again.


DUE_DATE_CHECK

You can use the DUE_DATE_CHECK program to send reminder emails for overdue workflows. Use the standard SAP transaction /SE38 to run the program once, or /SM36 to schedule it as a background job.

Reminder function for overdue workflows

Selection parameters

Document number to 

Workflow due date

☐ Overdue to specified date

☐ Activate email dispatch

Action on archiving error

Send collective emails

☐ Send collective emails

WEB CYCLE user

User type

Application log

☐ Create application log

☐ Show application log on finish

Object

Sub-object

Setting	Description
Document number	The range of INVOICE COCKPIT documents to be processed.
Workflow due date	Specify if the program should only run for workflows whose due date is past this date.
Overdue to specified date	Select if you have specified a due date above.
Activate email dispatch	Select to send reminder emails.
Send collective emails	You can set collective versus individual email sending in the customizing of the workflow step. The program, when executed, will check for processors who have received a workflow step and are now due new collective email.

Setting	Description
WEB CYCLE user	The user specified here is used as the sender of collective emails.
User type	I – WEB CYCLE user S – SAP user G – User group
Create application log	Creates messages in the SAP application log.
Show application log on finish	Displays the SAP application log after the program has been executed.
Object & Sub-object	The object and sub-object that are included in the messages in the SAP application log.

/COCKPIT/WC_CHK_DEL_USRS

Checks whether a user who no longer exists, is still assigned:

- To user groups
- To workflow steps
- As a substitute

WC_DEBUG

Enables the creation of log entries for PROCESS DIRECTOR and WORK CYCLE RFC calls, including those by the Web Application and User Exits. It can be used for debugging purposes. You can record log entries for calls made by specific users.

WC_RFC_LOG

Displays all the RFC log entries (a record of RFC calls made by the Web Application) stored in the /COCKPIT/TWC_LOG table. That is, it displays all log entries created by the [WC_WEB_LOGGING](#) function.

Setting	Description
Show RFC log	Displays the RFC log file saved in the /COCKPIT/TWC_LOG table.

Setting	Description
Put separator after seconds	Displays a horizontal line between entries after each specified period.
Delete all RFC log entries	Deletes all RFC log entries saved in the /COCKPIT/TWC_LOG table.

WC_SET_NOT_ARCHIVED

This program resets the archive flag so that the workflow can be archived again with [/COCKPIT/ARCHIV WCLOG REPAIR](#).

/COCKPIT/WC_SET_NOT_ARCHIVED can be used for workflows that have been marked as archived, but actually have the archive missing.

WC_UMA_PASSWD_INIT

This program is used to reset passwords for WORK CYCLE users, or force them to change their passwords when they next log on.

Setting	Description
Workflow processor	The WORK CYCLE user(s).
Email (in uppercase letters)	The email address(es) of the WORK CYCLE user(s).
Language key	The language setting for the WORK CYCLE user(s).
Complete name	The WORK CYCLE user(s) full name.
Telephone	The telephone number of the WORK CYCLE user(s).
Department	The department of the WORK CYCLE user(s).
Test run	Displays a log of users whose passwords will be reset, without actually performing the reset operation (where reset is either generating a new password or forcing the user to change their password, see below).

Setting	Description
Password is being regenerated	Generate a new password for the WORK CYCLE user(s).
User must change password	Force WORK CYCLE user(s) to change their password(s) the next time they log on.

WC_USER_UPDATE

This program is used to [import users from an LDAP directory](#).

Setting	Description
LDAP server	The LDAP server ID configured in the SAP system. (They can be viewed and managed using the LDAP transaction.)
Search filter	<p>Allows you to import only selected users based on search criteria.</p> <p>The default search filter is (&(objectclass=user)(mail=*)), which selects all users.</p> <p>Example: To select only users from a specific user group, you might use (&(objectCategory=group)(description=Sales)).</p>
System user active	<p>Uses the current SAP system user to logon to the LDAP server.</p> <p>If this setting is <i>not</i> selected, you must specify the username and password for an LDAP domain account to use instead (see below).</p>
User ID for logon	Username for the LDAP domain account to logon to the LDAP server.
Password for logon	Password for the LDAP domain account to logon to the LDAP server.
Send email	Existing users whose data is updated are notified via email.
Retrieve WORK CYCLE	Recalls (cancels) all workflows that are currently being processed by a user whose data is updated.

Setting	Description
No duplicate user check	Checks whether a duplicate email address exists (for example, if an LDAP user is already an SAP user, with the same email address).
Exclude from update	Specify users whose data will not be updated by the import (even if updated data exists).
Attribute name	Name of the LDAP attribute/field. Note: This field must be mapped to a WORK CYCLE field in /COCKPIT/WI27 .
Attribute value	The value for the above field. If this value is found in any of the existing users, they are deleted. Note: The WC_USER_UPDATE program searches for the value in the WORK CYCLE field that the above LDAP Attribute name has been mapped to in /COCKPIT/WI27 .
Delete all others	Deletes any existing user whose data is not updated by the import.
Exclude from delete	Specify existing users who are not deleted (only valid if Delete all others is active).
Commit database changes	Saves the imported data. If unselected, WC_USER_UPDATE performs a test run only and no data is imported or changed.
Create application log	Creates a log of the import
Show application log on finish	Displays the log after the import has finished.
Object	The name of the object to use to classify the log.

Setting	Description
	In order to create an application log (which is based on standard SAP functionality), you must specify an Object and Subobject (see below). The Object and Subobject classify the log, so it is best to use custom (Z*) ones.
Sub object	The name of the sub-object to use to classify the log.

WC_WEB_LOGGING


This function module records all RFC calls made by the Web Application. You should activate it in the [WC_DEBUG](#) program. The resulting log messages can be viewed using the [WC_RFC_LOG](#) program.

XPRA_V720_SP0

This program is only required if you have upgraded to PROCESS DIRECTOR 7.2 from a previous version and created Web Application (WUM) users in that previous version. This program ensures that it is possible to search for WUM users by email address.

Appendix A – IMG

To open the WORK CYCLE IMG, call the transaction /COCKPIT/WI.

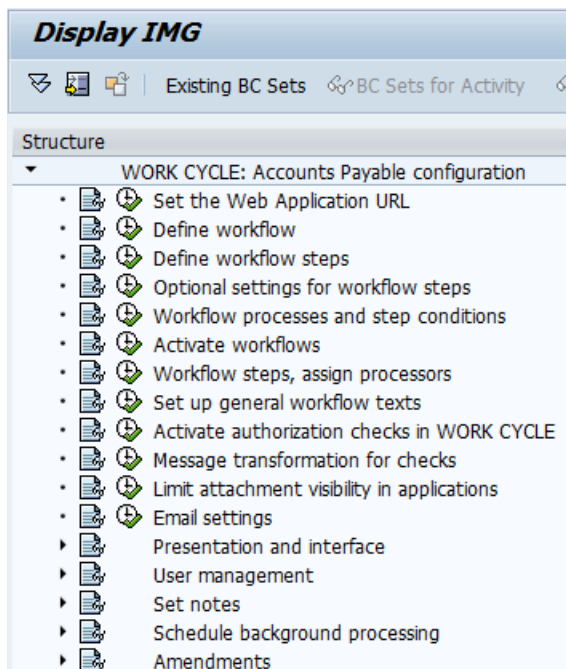

Setting the Web Application URL

/COCKPIT/WI1

Setting	Description
Activate WORK CYCLE	Turns on/off WORK CYCLE.
URL of WORK CYCLE Web Application	<p>The URL that is used in email templates for workflow starts, reminders, and so on.</p> <p>Note: This URL does not affect the setup or configuration of the Web Application.</p>

Define workflow

/COCKPIT/WI2

Setting	Description
Workflow ID	The name of the workflow.
Workflow description	The description of the workflow that appears in PROCESS DIRECTOR Accounts Payable.
Maximum processing time, in days	The period in which the workflow must be completed, after which daily reminder emails are sent.
Selection list order	<p>An integer that determines the position of the workflow in the workflow selection list in PROCESS DIRECTOR Accounts Payable. 0 places the workflow at the top of the list.</p> <p>The values for this field for each workflow do not have to be in sequential order. For example, you could have 0 = Workflow1, 5 = Workflow2, 20 = Workflow3.</p>
Workflow type	<ul style="list-style-type: none"> Unposted or unparked documents – Only unposted or unparked documents can be sent to the workflow.

Setting	Description
	<ul style="list-style-type: none"> Posted or parked documents – Only posted or parked documents can be sent to the workflow. All documents – All documents except rejected documents can be sent to the workflow.
Save notes in archive	Notes created in WORK CYCLE are saved in the archive.
Omit Friday/Saturday/Sunday	Determines whether Fridays, Saturdays and Sundays are used in the calculation of the Maximum processing time (above).
Factory or Holiday calendar ID	<p>Determines if a specified factory or holiday calendar is used in the calculation of the Maximum processing time (above). In other words, non-working days in these calendars are not included in the Maximum processing time calculation.</p> <p>You can only select a factory calendar <i>or</i> a holiday calendar, not both. If a calendar for both is selected, the factory calendar is used. If you want to use both a factory and a holiday calendar, assign a holiday calendar to a factory calendar in /OY05, and then select a factory calendar here for the workflow.</p>
PD document type for document creation	The PD document type used when creating documents using WORK CYCLE.
Mandatory note	Before the workflow can be started, a WORK CYCLE note must be created.

Define workflow steps

/COCKPIT/WI3

Setting	Description
Workflow step	The workflow step ID.

Necessary settings


Setting	Description
Step description	The description of the workflow step that appears in PROCESS DIRECTOR Accounts Payable and WORK CYCLE.
Workflow type	<ul style="list-style-type: none"> • 1 - Release: Document cannot be edited, only approved or rejected. Notes can be added. Document cannot be edited in PROCESS DIRECTOR Accounts Payable while in workflow. • 2 - Correction: Document can be edited and approved or rejected. Document cannot be edited in PROCESS DIRECTOR Accounts Payable while in a workflow. • 3 - Release and correction: Document can be edited and approved or rejected. Document cannot be edited in PROCESS DIRECTOR Accounts Payable while in a workflow. • 4 - For information purposes: Document can be edited, but a field status disallowing edits is recommended, as the document can be edited in PROCESS DIRECTOR Accounts Payable while in a workflow. No approval or reject functions, just a button to acknowledge receipt/viewing of document. A workflow step of this type can only be the last step of the entire workflow (thus, the only step in the workflow or the last step in a multi-step workflow).
Text of release function	<p>The text label of the Approve/Release button in the Web Application.</p> <p>Note: In the SAP GUI, the tooltip text is always Approve document.</p>

Setting	Description
Subject of email message	The subject of the email sent to the recipient(s) of the workflow step.
Text for the confirmation email	The content of the email sent to the recipient(s) of the workflow step. There are pre-installed templates you can use or copy and edit. For example: /COCKPIT/WEB_CYCLE_START.
Field status	<p>The field status to apply to the document when it is opened in WORK CYCLE.</p> <p>Note: If you leave the Field status blank, then no document edits are permitted.</p>
Validity period	<p>The period in which the workflow step must be completed, after which reminder emails are sent.</p> <p>Note that the sum total of the validity periods for all workflow steps assigned to a workflow must equal the Maximum processing time in the workflow configuration.</p>
Interval for reminder emails	For overdue workflow steps, the interval of sending reminder emails (in days).

Optional settings

Setting	Description
Forward	<p>Determines if documents can be forwarded to other users, and if queries can be sent.</p> <ul style="list-style-type: none"> • Not allowed Document cannot be forwarded. Queries cannot be sent. • X - Forward Document can be forwarded. Queries cannot be sent. • 1 - Queries without document handover Queries are allowed. After a query is sent, the document remains in the sender's worklist. Forwarding is not allowed.

Setting	Description
	<ul style="list-style-type: none"> • 2 - Queries with document handover Queries are allowed. After a query is sent, the document disappears from the sender's worklist until the query is answered. Forwarding is not allowed. • 3 - Forwards, and queries without document handover Forwarding and queries are allowed. After a query is sent, the document disappears from the sender's worklist until the query is answered. • 4 - Forwards, and queries with document handover Forwarding and queries are allowed. After a query is sent, the document remains in the sender's worklist.
All recipients must process	<p>If activated, all recipients of the workflow step must approve/release the document in order for the document to move to the next workflow step, or for the workflow to be completed (when the workflow step is the last in the workflow).</p> <p>If deactivated, after one recipient has approved/released the document, the document moves to the next workflow step/the workflow is completed.</p>
Line item/ account approval	<p>Permits each line item (MM invoices) and accounting lines (FI invoices) to be approved by separate processors. For example, when each processor is responsible for a different cost center.</p> <p>Note: To use this feature, you must also select All recipients must process, above.</p> <p>See Line item approval.</p>
Send emails	<p>Determines if recipients of the workflow step receive an email notification, and if so, what kind of email (single or collective, and if the document image is included as an attachment).</p> <ul style="list-style-type: none"> • Individual email without image attachment A single email is sent to each recipient of the workflow step. The document image is not included. • A - Individual email with image attachment A single email is sent to each recipient of the workflow step. The document image is included as an attachment.

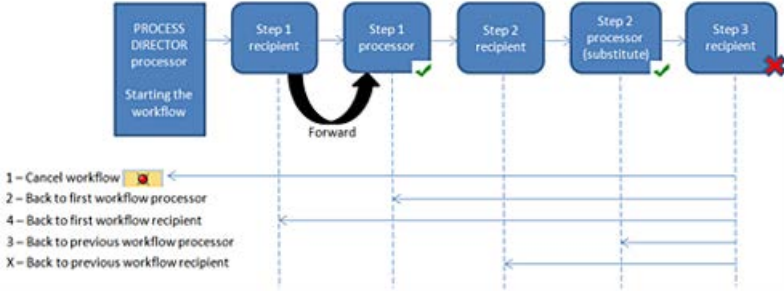Setting	Description
	<ul style="list-style-type: none"> • X - No email No email is sent. Recipients must manually check their WORK CYCLE worklists for new documents. • S - Collective email A collective email is sent to each recipient of the workflow step. Collective emails are scheduled and sent using the DUE_DATE_CHECK program.
Reject	<p>Specifies what happens when the workflow is rejected. The workflow can be canceled completely, or the document can be returned to the first or previous workflow step recipient or processor.</p> <p>A recipient is the person to whom the workflow step is sent. A processor is the person who actually approves or rejects the workflow step. In most cases, this will be the same person. However, if the recipient forwards the document to another person, or the recipient's substitute processes the document, the processor is not the same person as the recipient. Thus, it is possible to specify whether the document should be returned to the person who received the workflow step or to the person who actually processed it.</p> <p><i>This diagram illustrates the process.</i></p>  <p>Important: If it is possible for this step to be a start step of a workflow, you <i>must</i> set this to: 1 Cancel the workflow.</p> <ul style="list-style-type: none"> • Back to PROCESS DIRECTOR processor. Document remains in the workflow, but a PROCESS DIRECTOR Accounts Payable user must determine what action to take (cancel workflow, send document to another recipient, etc.) • X - Back to previous workflow recipient Document is sent to the recipient of the previous step in the workflow.

Setting	Description
	<ul style="list-style-type: none"> • 1 - Cancel workflow Entire workflow is canceled. • 2 - Back to first workflow processor Document is sent to the processor of the first step in the workflow (default behavior). • 3 - Back to first workflow recipient Document is sent to the recipient of the first step in the workflow. • 4 - Back to previous workflow processor Document is sent to the processor of the previous step in the workflow. <p>Note: For invoice documents created in the Web Application, the following rules apply:</p> <ul style="list-style-type: none"> • If the Reject setting for the first workflow step is set to Cancel workflow, the document is deleted from the system if the first workflow processor rejects it and it has not been processed by other users. • However, if the document has undergone processing by other users (for example, it was forwarded, queried, processed by a substitute or returned to the first workflow processor through the rejection of the subsequent steps), the document is not deleted when the first workflow processor rejects it.
Email archive	<p>Determines if notification emails are archived or not and if these emails can be edited before sending in WORK CYCLE.</p> <ul style="list-style-type: none"> • Do not archive as a note Notification emails are not recorded as notes. Emails cannot be changed in WORK CYCLE. • X - Archive as a note Notification emails are recorded as notes. Emails cannot be changed in WORK CYCLE. • A - Do not archive as a note, changeable in WORK CYCLE Notification emails are not recorded as notes. Emails can be changed in WORK CYCLE. • B - Archive as a note, changeable in WORK CYCLE Notification emails are recorded as notes. Emails can be changed in WORK CYCLE.

Setting	Description
Executability	Determines whether a workflow step must be completed (Mandatory) or not (Optional).
Doc. upload	Determines if processors can attach additional files to the document in the Web Application.
Recall documents in Web Application	Determines if processors can recall documents in the Web Application.

Agent

Setting	Description
Any email address	Email users can be recipients of the workflow step.
SAP users	SAP users can be recipients of the workflow step.
Internet users	WORK CYCLE users can be recipients of the workflow step.
User groups	User groups can be recipients of the workflow step.
Pre-assign processors	<p>Determines which users can be recipients and if any are pre-allocated. For a full matrix of how this setting works, see...</p> <ul style="list-style-type: none"> Default assigned processors only Only processors listed in /COCKPIT/WUM2 (or specified in a User Exit) can be recipients. Default processor(s) are pre-assigned to the workflow step. X - All assigned processors Only processors listed in /COCKPIT/WUM2 (or specified in a User Exit) can be recipients. Default and non-default processor(s) are pre-assigned to the workflow step. A -Default assigned, any other processor Processors listed in /COCKPIT/WUM2 (or specified in a User

Setting	Description
	<p>Exit) and any other users can be recipients. Default processor(s) are pre-assigned to the workflow step.</p> <ul style="list-style-type: none"> • B - All assigned, any other processor Processors listed in /COCKPIT/WUM2 (or specified in a User Exit) and any other users can be recipients. Default and non-default processor(s) are pre-assigned to the workflow step.
Assignment of processors	<ul style="list-style-type: none"> • In PROCESS DIRECTOR Accounts Payable The processor can only be assigned manually in PROCESS DIRECTOR Accounts Payable. • 1 - In WORK CYCLE* The processor can only be assigned manually in WORK CYCLE. • 2 - In PROCESS DIRECTOR Accounts Payable or WORK CYCLE The processor can only be assigned manually in PROCESS DIRECTOR Accounts Payable or WORK CYCLE. • 3 - In background* (automatic, without manual intervention) The processor is assigned automatically. Use for automatic workflow starts and for workflow steps in the 2nd or subsequent position where the previous workflow step processor must not select the recipient(s) of the next step. <p>* Workflow step recalls are not possible when this option is active.</p>

User Exits

You can activate User Exits at the following points to perform some action(s):

- Check if the WORK CYCLE step can be started
- Define possible processors and parallel steps
- Logic after the step action has been performed
- Logic after the step has been released
- Check recipients of the step

Optional settings for workflow steps

/COCKPIT/WI17

Setting	Description
Workflow step	The workflow step ID.

Note settings

Setting	Description
Note required	<p>Specifies when a note must be created before performing the following steps:</p> <ul style="list-style-type: none"> • Before replying to workflow step • Before querying workflow step • Before forwarding workflow step • Before releasing workflow step (approving step) • Before rejecting workflow step <p>Note: Mandatory notes cannot be applied to workflow steps of type 4 - For information purposes.</p>

Cover sheet settings

Setting	Description
Print cover sheet?	<p>This setting displays a Print cover sheet button when the document is opened in the Web Application. When clicked, a PDF is opened in a popup window that displays a cover sheet for the document.</p> <p>Cover sheets can be used to attach subsequent documents to a document using the ReadSoft DOCUMENTS Rescan function. Cover sheets contain the PROCESS DIRECTOR document number, as well as a barcode, which are used to identify documents.</p>
Form name	The name of the PDF form to use for the cover sheet.

Recipient settings

Setting	Description
Single recipient of workflow step	Only one user can be the recipient of the document. Other processors cannot be added.
Permitted recipient check	<p>Restrictions on which users can be recipients of a document in the workflow step:</p> <ul style="list-style-type: none"> • S – New recipient (not the current processor) • X – Principle of dual control (recipient not previous processor) • – None • F – None, forwarding permitted to oneself • I – Sender/initiator cannot be processor of the workflow
Any user for forwarding	<p>The document can be forwarded to users not listed in /COCKPIT/WUM2 (non-default users).</p> <p>Only applicable if the Pre-assign processors setting in /COCKPIT/WI3 is set to All assigned processors or Default assigned processors only.</p>
Any user for queries	<p>The document can be forwarded to users not listed in /COCKPIT/WUM2 (non-default users).</p> <p>Only applicable if the Pre-assign processors setting in /COCKPIT/WI3 is set to All assigned processors or Default assigned processors only.</p>
PD message type start/continue	<p>Determines whether unassigned steps are checked when a workflow is started or continued in PROCESS DIRECTOR.</p> <p>When a workflow is started or continued, if no recipient has been assigned to certain steps and step customizing only allows a PROCESS DIRECTOR user to assign steps, the user can be informed of these missing step recipients by a pop-up:</p>

Setting	Description
	<p>If a warning pop-up appears, the user can decide whether he/she wants to send the workflow anyway or correct the assignment.</p> <p>If an error pop-up appears, he/she must correct the assignment.</p> <p>The first character of this flag refers to the workflow start, the second line refers to the workflow continuation.</p> <p>If the line is empty or it contains an "S", no check is carried out.</p> <p>If "W" is entered, a warning pop-up will appear.</p> <p>If "E" is entered, an error pop-up will appear.</p> <p>Note: Recipients must be entered in the first item when a workflow is started, and in the next item when a workflow is continued. If this is not done, an error message will appear, which cannot be overruled by any of the settings described here .</p>
<p>No processor takeover for substitution</p>	<p>As a result of setting this flag, automatic processing does not take place if the step of a workflow goes to two processors, and one of the processors is also the substitute of the other processor and takes over processing.</p> <p>Use</p> <p>It makes sense to set this flag if all processors must process the workflow step and, in the case of substitutes, manual take over of processing by the substitute should be enforced, even though the substitute is also a recipient of the workflow step.</p> <p>Dependencies</p> <p>The prerequisite for this is that the workflow step must be processed by all recipients (All recipients must process).</p> <p>Example</p> <p>A workflow step that must be processed by all processors is sent to user A and user B. A is also the active substitute of B.</p> <p>The step is normally automatically processed by A as well, if this flag is not set. Setting the flag has the effect that, after A has processed the workflow step, B must still process the workflow step and thus it could be processed again by A in the capacity of substitute.</p>

Line item/account approval

Setting	Description
Default recipient type	This setting determines the default recipient type. If only one user type is defined in the workflow step settings, this user type is defaulted. If several user types are defined in the step settings, it is possible to define the default user type here.
Show all lines	By default, workflow processors see only those lines that are assigned to them, or the lines that are not assigned to anyone. Via this Show all lines configuration option, it is possible to display the items (in read-only mode) assigned to the other processors, rather than hiding them.

Workflow steps, assign processors

/COCKPIT/WUM2

Workflow processor

In this table, you pre-allocate recipients to workflow steps. To display the table, select a **Workflow ID/Workflow step** combination and double-click **Workflow processors**.

Setting	Description
Workflow ID	The name of the workflow.
Workflow step	The workflow step ID.
Workflow processor	The ID of the user who is a pre-allocated recipient of the workflow step.
User type	<ul style="list-style-type: none"> • I – WORK CYCLE user • S – SAP user • G – User group

Setting	Description
Set default	Indicates the user is a default processor (there can be more than one) for the workflow step. The Pre-assign processors setting in the workflow step configuration determines if non-default and/or default users are pre-allocated to the step when the step is started. See the Processor pre-allocation and assignment matrix for details.

Workflow processes and step conditions

/COCKPIT/WI4

There are two tables in this transaction. The first is to allocate workflow steps to workflow shells. The next, accessed by double-clicking **Define step conditions**, is to specify conditions that the workflow step must meet for it to be executed.

Workflow processes

Setting	Description
Workflow ID	The name of the workflow.
Workflow step ID	The workflow step ID.
Position	The position of the workflow step in the workflow, where 1 is the first step in a workflow, 2 is the second step, and so on. Note: A workflow step can be used in/assigned to more than one workflow.

Step conditions

Setting	Description
Item/Sequence	Multiple conditions can be created. The Item number is the sequence or order the condition is calculated.
Structure	The type of field:

Setting	Description
	<ul style="list-style-type: none"> CHECKDATA (used to identify the vendor) HEADER (header data) ITEM (line item data) TAX (tax data) ACCOUNT (account assignment data) ACCASS (multi-account assignment data) SORDER (purchase order data) CPD (one-time vendor)
Internal field	The name of the PROCESS DIRECTOR field that the condition calculation is based on.
Inclusion/exclusion	Indicates whether the From and To values (below) are included in the calculation or not.
Comparative options	<p>The function to compare the From and To values (below).</p> <ul style="list-style-type: none"> BT – Between from-value and to-value EQ – Same as from-value NE – Different to from-value CP – Same pattern as from-value GE – Greater than or equal to from-value GT – Greater than from-value LE – Less than or equal to from-value LT – Less than from-value
From value/To value	<p>The values used in the calculation of the condition.</p> <p>Note: To avoid errors, enter the values in SAP internal format. For example, for cost center 1000 enter 0000001000, for vendor 2500 enter 0000002500.</p>

Setting	Description
Opening bracket/Closing bracket	If more than two conditions are specified, opening and closing brackets can be used to perform a calculation block of two or more conditions before the next condition is calculated.
Boolean operator	Used to join conditions. Select from AND or OR .

Activate workflows

/COCKPIT/WI7

This table is used to [activate workflows](#).

Setting	Description
Company code	The buying organizational unit.
FI/MM	FI or MM documents.
PD document type	The PROCESS DIRECTOR document type. Note: Workflows to which a document type has been assigned will be available in the Invoice type selection list when users create a new invoice.
Workflow ID	The name of the workflow .

Set up general workflow texts

/COCKPIT/WI9

In this table you specify the **Subjects** and [Texts](#) of workflow emails for the following uses:

Use	Description
Recalling a workflow	Sent when a workflow step is recalled, or the entire workflow is canceled.
Reminders for overdue workflows	Sent when a workflow step, or an entire workflow, is overdue.
Processing by a different user	Sent to the original recipient of a workflow when a substitute takes over processing of a document.
Collective emails	<p>Collective emails are emails that contain links to more than one document, which are sent using the /COCKPIT/DUE_DATE_CHECK program. Collective emails are activated in the workflow step configuration and are a replacement for sending individual emails for every workflow a user receives.</p> <p>In addition, you also specify the Sender of the email, which can be any SAP user.</p>
Active substitutes at workflow start	Sent to active substitutes when a document is sent.
Answering queries	Sent when a user answers a query about a document.
Sending queries	Sent when a user sends a query about a document to another user.
Forwarding a workflow	Sent when a user forwards a workflow to another user for processing.

There are [built-in templates](#) that you can use or modify for the email texts.

The text used for sending emails to workflow recipients is specified in the [workflow step configuration](#) (**Text for the confirmation email**).

Activate authorization checks in WORK CYCLE

/COCKPIT/WI13

Setting	Description
Authorization object	The name of the SAP authorization object employed to permit access to WORK CYCLE. If no authorization object is specified, all SAP users can access WORK CYCLE.

Message transformation for checks

/COCKPIT/WI22

You have the ability change the *type* of messages that are presented for different checks, as well as suppress them completely. This applies to both PROCESS DIRECTOR and SAP messages. It could be useful, for example, if you do not wish to have coding block (COBL) error messages appear for documents where no cost center has been assigned. You can apply such rules for all workflow steps, or restrict them for specific workflow steps.

Setting	Description
Message check time	The time when the check occurs that you wish to change.
<u>Workflow step ID</u>	The workflow step ID.
Type	The type of check that you wish to change.
Message ID	The message class. See /SE91. The message class contains a collection of messages (see Message No. , below). All PROCESS DIRECTOR message classes are saved in /COCKPIT/*.
Message No.	The message ID. The actual message you wish to change or suppress. See /SE91 for a list of message numbers and the message text.
Any message	If active, the rule applies to all messages for the Message ID and the Message No. is ignored.

Setting	Description
Action	The change to the <i>type</i> of message or error that is generated. Or, whether the message is suppressed/ignored.

Limit attachment visibility in applications

/COCKPIT/WI28

Here you can restrict which types of attachments to PROCESS DIRECTOR can be viewed in the Web Application.

Setting	Description
Web application	<p>The part of the Web Application where the attachment is to be hidden:</p> <ul style="list-style-type: none"> • WORK CYCLE (history) When viewing documents that have already been processed. • WORK CYCLE (document selection) When viewing the document detail screen. • WORK CYCLE (worklist selection) When viewing the document list.
<u>Workflow step ID</u>	The workflow step ID.
Document type	A PROCESS DIRECTOR archive document type, which is to be hidden.


Email settings

Email settings

/COCKPIT/WI30

Setting	Description
Format	P - Plain text: Emails are sent in plain text format. The remaining settings in this table are ignored.

Setting	Description
	<p>H - HTML: Emails are sent in HTML. The remaining settings in this table are applied to configure the structure and format of the HTML emails.</p> <p>If no value is specified here (the case if no change is made to this table), plain text is used.</p>
HTML start	<p>The start of the HTML email, from the <HTML> tag to the <BODY> tag.</p> <p>Default: /COCKPIT/HTML_START</p>
HTML end	<p>The end of the HTML email, from the </BODY> tag to the </HTML> tag.</p> <p>Default: /COCKPIT/HTML_END</p>
MOBILE APPROVAL links	<p>The formatting of the MOBILE APPROVAL links for approving, rejecting and adding notes to documents.</p> <p>Default: /COCKPIT/HTML_MOBILE_BUTTONS</p>
Link names	<p>See /COCKPIT/WI31.</p>
Number of fields per row	<p>The number of fields to appear in each table row.</p> <p>A field consists of the field name and the field value. That is, two cells are displayed.</p> <p>Note: This setting is not used if MOBILE APPROVAL is active for a workflow step. In this case, only one field/row is displayed.</p>
Add multi acc. ass. to items	<p>Determines if multi-account assignment fields (for MM documents) are included as part of the line-item table, or is displayed as a separate table.</p>

Setting	Description
Ignore MOBILE APPROVAL	If MOBILE APPROVAL is active for a workflow step, only one field is displayed per table row and the Field numbers per row setting <i>is not</i> used. By selecting Ignore MOBILE APPROVAL , the Number of fields per row setting <i>is</i> used.
Field selection	See /COCKPIT/WI32 .
Disable email background	If you do not want to use a background image in the email, check this check box.
Background	The ID of the image to use for the background of the email. If no background image is specified, the default (backgrnd.gif) is used: 

HTML email link names

/COCKPIT/WI31

Use this table to specify the display names for the document URLs. That is, instead of displaying the URL, a display name is used for the hyperlink.

Setting	Description
Alias	<ul style="list-style-type: none"> • &WEB_CYCLE_DIRECT_DOCUMENT_LINK& The URL of the Web Application to the list of documents to approve. • &WEB_CYCLE_DOCUMENT_LIST_LINK& Same as above: The URL of the Web Application to the list of documents to approve. (Two aliases/variables exist to provide backward compatibility with previous versions of PROCESS DIRECTOR Accounts Payable.) • &WEB_CYCLE_SINGLE_DOCUMENT_LINK& The URL of the Web Application to a single document. • &WEB_CYCLE_SINGLE_SIGN_ON_LINK& The URL of the Web Application logon page.

Setting	Description
	<ul style="list-style-type: none"> • &WEB_CYCLE_SUBST_DOC_LIST_LINK& The URL of the list of documents from a person of whom another person is a substitute.
Value	The display name for the hyperlink.

Email field selection

/COCKPIT/WI32

Use this table to specify which fields are displayed in HTML workflow emails.

Setting	Description
Structure	<p>The type of field/the table in which a field is located:</p> <ul style="list-style-type: none"> • HEADER - Header data • ITEM - Line item data • ACCOUNT - Account assignments for FI items • ACCASS - Account assignments for MM items
Internal field name	The name of the field in PROCESS DIRECTOR Accounts Payable.

Presentation and interface

Maximum number of fields in the Web Application

/COCKPIT/WI11

This table lists the fields that can be displayed in the Web Application. If a field is not listed here, it cannot be displayed in the Web Application.

Setting	Description
Structure	<p>The type of field/the table in which a field is located:</p> <ul style="list-style-type: none"> • HEADER - Header data

	<ul style="list-style-type: none"> • ITEM - Line item data • ACCOUNT - Account assignments for FI items • ACCASS - Account assignments for MM items • TAX - Tax fields • CHECKDATA - Bank and other data fields. • SORDER - Purchase order fields* • CPD - One-time vendor fields
Internal field name	The name of the field in PROCESS DIRECTOR.

* You can extend the /COCKPIT/SORDER table using fields from the BAPIEKPO (purchase order) and BAPIEBES (purchase order history) tables using the CI_COCKPIT_ORDER include.

Creating field status and assigning field characteristics

/COCKPIT/C23

Field status identification

Setting	Description
Field status	The name/ID of the field status.
Header data can only be displayed	Display all header fields as read-only.
Display invoice items only	Display all line-item fields as read-only.
Only display account assignment	Display all account assignment fields as read-only.
No account assignment line with MM invoices	The account assignment fields for FI items in MM documents are hidden.
Display withholding tax only	Display withholding tax fields as read-only.

Setting	Description
Display tax only (no entry)	Display tax fields as read-only.

Screen variants

Here you can assign screen variants for the **Invoice items**, **Account Assignments**, **PO Account Assignments** and **PO Data** grids. See the SAP documentation for information on creating screen variants.

Characteristic value of status

Setting	Description
Structure	<p>The type of field:</p> <ul style="list-style-type: none"> • CHECKDATA (used to identify the vendor) • HEADER (header data) • ITEM (line item data) • TAX (tax data) • ACCOUNT (account assignment data) • ACCASS (multi-account assignment data) • SORDER (purchase order data)
Internal field name	The name of the field in PROCESS DIRECTOR.
Display	<ul style="list-style-type: none"> • D Only display. Display the field as read-only. • H Hide. Do not display the field • M Mandatory field. Force a value to be entered for the field before the document can be saved. • Normal field. A field whose value can be changed.

Maintain default layouts for the WORK CYCLE transaction overview screen

/COCKPIT/WI12

Here you can specify the default layout, using variants, of the following sections in the WORK CYCLE document list:

- Layout of heading list
- Layout of MM invoice items
- Layout of FI coding items

Activate WORK CYCLE customer-specific functions

/COCKPIT/WI14

Displays menu items to execute custom functions. Use the PROCESS DIRECTOR User Exit 12 (/COCKPIT/USEX_CUSTFCT_PROCESS) to link menu items to functions.

Setting	Description
Workflow step	The workflow step ID.
Activate customer functions	Enables the additional menu in /COCKPIT/WC.
Menu description	The name of the menu.
Setting	Description
Description	The name of the menu item.
Icon	An icon to use for the menu item. (Optional)
Op. mode	Specifies whether the function should lock the document (no other changes permitted while locked) or not. <ul style="list-style-type: none"> • _ - Lock and update document • 1 - Lock but do not update document

Setting	Description
	<ul style="list-style-type: none"> 2 - No lock and no update of document
Process several documents	Specifies whether the function can be executed on more than one document simultaneously.

Archive document types for document upload in the Web Application

/COCKPIT/WI15

In this table you can specify the permitted document types that can be uploaded in the Web Application. The document types are the ones created for PROCESS DIRECTOR during installation, in /OAC2. Document types must be listed here in order for Web Application users to upload files of that type in the Web Application.

Define forms for workflow steps for the Web Application

/COCKPIT/WI16

In this table you list the archive document types to use when Web Application users fill in and submit forms. If this table is empty, the first matching entry in [/COCKPIT/C15](#) is used.

Setting	Description
Workflow step ID	The workflow step ID.
Language	The language of the form.
File name of form	The filename (as it appears in the Web Application) of the form.
Name of form	The name of the form.
Document type	The archive document type to use for the form. The document types are the ones created for PROCESS DIRECTOR during installation, in /OAC2.

Extend selection criteria for workflow history

/COCKPIT/WI24

This table contains additional fields displayed on the **History > New invoice selection** tab, when searching for processed documents. These selection fields are also displayed in the SAP GUI **Workflow > Display releases (history)** popup. The default fields are:

- Workflow name
- Last approval/action from/to
- Display approvals only
- Maximum number of rows

Setting	Description
Table name	<p>The type of field:</p> <ul style="list-style-type: none"> • HEADER – Header fields • WEB_CYCLE – WORK CYCLE workflow fields (workflow step ID, due date, read/unread status).
Field name	The name of the field.
Selection type	<p>The type of selection for the field:</p> <ul style="list-style-type: none"> • 1 – Single parameter provides one field for entry of a single value. • 2 – From/To parameter provides two fields for entry of a range, for example, between document number 1000 to 2000. • 3 – Checkbox allows multiple selection of the available options. • 4 – Radio button allows selection of only one of the available options. <p>Warning: Use the Radio button selection type only with fields with an applicable type. Using it with fields whose types are CHARACTER or INTEGER will result in incorrect search results.</p>

Setting	Description
Status description	The display text for the field in the Web Application. If no text is entered, the standard field name from the data dictionary is used.
Sequence	The order in which the fields are displayed (lowest to highest value).

Note: The remaining configured fields are available via the **Other selection fields** button. Only simple From-To selections are allowed; it is not possible to define ranges or single values.

Web Application search help

Insert or adapt search helps

/COCKPIT/WI19

In these tables you can override and add additional [search helps provided by the system](#). This however only applies to the Web Application.

Setting	Description
Structure	<p>The type of field:</p> <ul style="list-style-type: none"> • CHECKDATA (used to identify the vendor) • HEADER (header data) • ITEM (line item data) • TAX (tax data) • ACCOUNT (account assignment data) • ACCASS (multi-account assignment data) • SORDER (purchase order data) • CPD (one-time vendor)
Internal field name	The name of the field in PROCESS DIRECTOR
Function module	<p>The function module that provides the search help for the specified field.</p> <p>To suppress a search help provided by default, leave this field blank.</p>

Search help fields

For each field you add above, you must specify the fields that can be used to search and are displayed in the search results.

Setting	Description
Field name in search help	<p>The name of the field to display in the search results.</p> <p>You must include the field that you added in the above table. It may be the same (PROCESS DIRECTOR) field or the corresponding SAP field.</p> <p>Example: If TAX_CODE (a PROCESS DIRECTOR field) was in the above table, you must add MWSKZ (an SAP field) to this table. If you added FOLLOW_UP (a PROCESS DIRECTOR table) to the above table, you can also add FOLLOW_UP to this table.</p>
Priority	<p>The order of the fields, starting on the left with 1, then 2, 3, and so on.</p> <p>Note: The search field must be assigned to 1. For example, if you added TAX_CODE to the above table, the MWSKZ field must be added to this table and assigned 1 as the Priority.</p>
ABAP type	The data type (for example, Character string, Date, Time, etc.)
No. of characters	The length of the field to display the field values.
Search/display	<p>Determines whether the field can be used as input for searching and/or displayed in the search results.</p> <ul style="list-style-type: none"> • S – Search • D – Display • B – Both
Label	The label of the field in the search form and the header of the result list column.

Setting	Description
	Warning: If the label is not available in the language in which the user is currently logged on, the entire field will not be displayed in the search help.

Optional: SAP search helps

If /COCKPIT/WC_SHLP_GENERAL has been used in the first table, you must define an SAP search help to use here.

Setting	Description
Table name	Any table or structure which contains the field name and where a search help has been provided for that field. Typically this would be either: <ul style="list-style-type: none"> • /COCKPIT/SHDR_DISP • /COCKPIT/SITEM_DISP • /COCKPIT/SACCT_DISP • /COCKPIT/TACCAS
Search help name	An elementary search help with the search help provided in the table/structure above.

Default search helps

/COCKPIT/WI18

This table contains the default search helps for the Web Application. If you want to add/edit/suppress any search help, do not edit this table, use [/COCKPIT/WI19](#) instead.

Setting	Description
Structure	The type of field: <ul style="list-style-type: none"> • CHECKDATA (used to identify the vendor) • HEADER (header data)

	<ul style="list-style-type: none"> • ITEM (line item data) • TAX (tax data) • ACCOUNT (account assignment data) • ACCASS (multi-account assignment data) • SORDER (purchase order data) • CPD (one-time vendor)
Internal field name	The name of the field in PROCESS DIRECTOR
Function module	The function module that provides the search help for the specified field.

Search help fields

Setting	Description
Field name in search help	The name of the field to display in the search results.
Priority	The order of the fields, starting on the left with 1 , then 2 , 3 , and so on.
ABAP type	The data type (for example, Character string, Date, Time, etc.)
No. of characters	The length of the field to display the field values.
Search/display	<p>Determines whether the field can be used as input for searching and/or displayed in the search results.</p> <ul style="list-style-type: none"> • S – Search • D – Display • B – Both
Label	The label of the field in the search form and the header of the result list column.

Optional: SAP search helps

Setting	Description
Table name	Any table or structure which contains the field name and where a search help has been provided for that field.
Search help name	An elementary search help with the search help provided in the table/structure above.

Web Application: Document selection**Web Application: User group for document selection**

/COCKPIT/WI25

Here you specify the user group that is able to view PROCESS DIRECTOR documents in the Web Application (that is, any PROCESS DIRECTOR document, not just ones sent to these users in a workflow). You can only specify one user group.

Setting	Description
Work group	Any WORK CYCLE user group.

Web Application: Criteria for document selection

/COCKPIT/WI26

This table contains the document selection criteria for the **PD documents** tab.

Setting	Description
Table name	The type of field: <ul style="list-style-type: none"> • HEADER – Header fields • WEB_CYCLE – WORK CYCLE workflow fields (workflow step ID, due date, read/unread status).
Field name	The name of the field.

Selection type	<p>The type of selection for the field:</p> <ul style="list-style-type: none"> • 1 – Single parameter provides one field for entry of a single value. • 2 – From/To parameter provides two fields for entry of a range, for example, between document number 1000 to 2000. • 3 – Checkbox allows multiple selection of the available options. • 4 – Radio button allows selection of only one of the available options. <p>Warning: Use the Radio button selection type only with fields with an applicable type. Using it with fields whose types are CHARACTER or INTEGER will result in incorrect search results.</p>
Alternative assignment	The display text for the field in the Web Application. If no text is entered, the standard field name from the data dictionary is used.
Sequence	The order in which the fields are displayed (lowest to highest value).

Maintain default values for document creation

/COCKPIT/WBI7

When the ability to create invoices in the WORK CYCLE Web Application has been given (by activating the **wb_create** parameter in `webcycle-app.properties`), you can list default values for header fields.

Setting	Description
PD document type	The PROCESS DIRECTOR document type. A blank entry here will make a value the default for all documents unless an entry exists with a specific document type.
Internal field name	The name of the PROCESS DIRECTOR header field.
Field value	The value that is displayed for the field when creating a new invoice.

Web Application: Configuring fields for one-time vendors

/COCKPIT/WI29

This table lists the one-time vendor fields that are displayed for the vendor record in the Web Application.

Setting	Description
Vendor	The name of the vendor. Can be used to apply different field settings to different vendors. If left blank, the field setting is applied to all vendors.
Field name	The name of the field in PROCESS DIRECTOR.
Display	<ul style="list-style-type: none"> • D - Only display Display the field as read-only. • H - Hide Do not display the field. • M - Mandatory field Force a value to be entered for the field before the document can be saved. • Normal field A field whose value can be changed. <p>Note: The NAME1 (Name) and OTR01 (City) fields are displayed as mandatory fields in the Web Application and do not need to be entered here.</p>
Priority	The row position of the field, with 0 being the highest row. If more than one field has the same row number, the fields are sorted alphabetically.

User management

Mapping of LDAP attributes to user master data

/COCKPIT/WI27

This is the mapping table used by [/COCKPIT/WC_USER_UPDATE](#) to import users from an LDAP directory to WORK CYCLE.

Setting	Description
Attribute name	The name of the field in the LDAP directory.
Internal field name	A WORK CYCLE user field. Use the Search Help for possible fields (from the /COCKPIT/TWC_UMP table).
Function module	Optional. Use a function module to modify the import data before it is saved in /COCKPIT/TWC_UMP. No standard function module exists—you must write your own to modify the data as you wish.

Set WORK CYCLE user management

/COCKPIT/WI6

This table contains various settings regarding the creation of new WORK CYCLE users.

Setting	Description
User Management Customizing	
User generation	<p>The method used to create WORK CYCLE usernames (if one is not specified).</p> <ul style="list-style-type: none"> • – Random name Random characters are used to compose usernames. • 1 – Generate name from email The first part of email address are used to compose usernames.

Setting	Description
Mapping module	<p>The function module used to import user data from a file.</p> <p>/COCKPIT/WC_MAP_IMP_EXAMPLE is a built-in example that can be used to import users from CSV files.</p>
Initial password	<p>The initial password for all users. Each user must change this initial password when they first log on.</p> <p>If no initial password is specified here, the system automatically generates a random password.</p> <p>Note: This password is stored in encrypted form on the database.</p>
Use eMails	
Create or delete	Sends an email to newly created or deleted users.
Create Mail Txt	The email text to send to newly created users.
Delete Mail Text	The email text to send to deleted users.
Mail Text to Subs	The email text to send to substitutes for newly created or deleted users.
Lock or unlock	Sends an email to users who have been locked or unlocked.
Mailtext	The email text to send to users who have been locked or unlocked.
Change password	Sends an email to users when their password changes.
Mailtext	The email text to send to users when their password changes.




Setting	Description
Duplicate check	
Check user ID	Validates whether an SAP user with the same user ID already exists.
Check mail address	Validates whether an SAP user with the same mail address already exists.
Check name (first name/last name)	Validates whether an SAP user and/or a WORK CYCLE user with the same first name and last name already exists (for example: John Smith).
Check name (last name/first name)	Validates whether an SAP user and/or a WORK CYCLE user with the same last name and first name already exists (for example: Smith John).









WORK CYCLE user management


/COCKPIT/WUM

You can create, edit and delete users, as well as perform other tasks described below.

To perform most of these actions, you must first enter the username in the **Workflow processor** field.

Icon	Action	Description
	Create	Opens the User data dialog to enter details of the new user.
	Change	Opens the User data dialog to change the details of an existing user.
	Display	Opens the User data dialog to display details of an existing user.

Icon	Action	Description
	Lock	<p>Locks the user. If the user is logged on when you apply the lock, they can continue to work in the current session.</p> <p>Warning: Locking or deleting users may result in unfinished workflows. For example, if the locked or deleted user is the sole user assigned to the last workflow step, the workflow cannot be completed. In this case, the workflow must be recalled.</p>
	Unlock	<p>Unlocks the user.</p>
	Delete	<p>Deletes the user.</p> <p>Warning: Locking or deleting users may result in unfinished workflows. For example, if the locked or deleted user is the sole user assigned to the last workflow step, the workflow cannot be completed. In this case, the workflow must be recalled.</p>
	Initialize password	<p>Generates a new password for the user.</p> <p>The user must change this initial password when they log on. You can define this initial password in /COCKPIT/WI6.</p> <p>Use the WC UMA PASSWD INIT program to initialize passwords for more than one user at the same time.</p>
	Change password	<p>Manually specify a new password for the user.</p>
	Import	<p>Opens the Import user dialog, where you can specify the file to import users from. The function module for performing the import is specified in /COCKPIT/WI6.</p>
	User group	<p>Opens /COCKPIT/WUM1 to manage user groups.</p>
	Assign users	<p>Opens /COCKPIT/WUM2 to assign users to workflow steps.</p>

Icon	Action	Description
	PROCESS DIRECTOR authorization roles	Opens /EBY/ICWC_UM3 to assign authorization roles. This option only appears if you have PROCESS DIRECTOR installed (not just PROCESS DIRECTOR Accounts Payable). See the <i>PROCESS DIRECTOR SAP Configuration Guide</i> for details.

User group management

/COCKPIT/WUM1

You can create and manage user groups in this table.

Setting	Description
Workgroup	The unique ID of the user group.
Description	A descriptive text of the user group.
Assigned processors	
User type	<p>There are three kinds of users that can be included in user groups:</p> <ul style="list-style-type: none"> • I – WORK CYCLE user • S – SAP user • G – User group <p>Email users/addresses cannot be included in user groups.</p>
Workflow processor	The user name.

Define search help for workflow processor

/COCKPIT/WI5

When search help is used inside SAP to select users for a workflow (for example, when a PROCESS DIRECTOR user starts a workflow), the search help for finding users looks at all users of the specified user type (SAP, WEB CYCLE, and User Group). However, you can restrict which users are searched by:

1. Writing a function for the specific user search you wish to implement.
2. Specifying the **User type** for which this search will be used in the above table.

Note: This configuration only affects user search helps for WEB CYCLE in the SAP GUI. It does not affect user search helps in the Web Application.

Setting	Description
User type	The type of user for which the search help function will be used. <ul style="list-style-type: none">• I – WORK CYCLE user• S – SAP user• G – User group
Search help name	The search help function to find users.

Define substitute profile

/COCKPIT/WI33

Here you specify the substitute profile in SAP that takes precedence when allocating substitutes. The profile is also assigned to new substitutes created using the Web Application.

See [Using a substitute profile](#) for a full explanation.

Set notes

Use WORK CYCLE notes

/COCKPIT/WI8

Here you can restrict which types of attachments to PROCESS DIRECTOR can be viewed in the Web Application.

Setting	Description
Use notes	Enables the creation of WORK CYCLE notes.
Document type WORK CYCLE notes	The document type to use for archiving WORK CYCLE notes. The document type must be listed in /OAC2. If PDF is used, a form must be entered for the creation of the PDF (see Form for creating PDFs , below). The /COCKPIT/TEXT form is available but can be changed if a new form is to be used.
Archive as text document	Archives notes in TXT format.
Archive as PDF document	Archive notes in PDF format.
Form for creating PDFs	The form to use to create PDFs from WORK CYCLE notes. Mandatory if archiving as PDFs.
Archive as HTML	Archive notes in HTML format.
Document type internal notes	The document type to use for archiving internal notes
Notes in list	Enables notes to be displayed in the document worklist.
Notes in detail	Enables notes to be displayed when viewing documents. A separate tab appears in the document header.

Setting	Description
Comment symbol for not title	<p>The character to use to denote comments in the note's title (which displays the note's metadata, such as Subject, Creator, etc.). For example, using * will result in:</p> <pre>*** 24 / 24 ***** * Note type : Email for workflow start * Subject : Please approve * Creator : John SMITH (SAP User: SMITH) * Date / Time : 16.06.2011 / 15:01:14 (CET) *****</pre>

Maintain WORK CYCLE note types

/COCKPIT/WI10

These settings are system based and may not be changed. They are supplied as default WORK CYCLE settings. However, further note types can be defined for individual extensions, which must exist in the customer's own SAP area, meaning they begin with Z* or Y*.

Schedule background processing

Schedule reminder emails

/SM36

A shortcut to /SM36 to define a background job for the [DUE DATE CHECK](#) program.

Schedule archiving of other notes


/SM36

A shortcut to /SM36 to define a background job for the [ARCHIV NOTE LATE](#) program.

Amendments

Activate User Exits

/COCKPIT/WI23

Setting	Description
User Exits	The ID of the PROCESS DIRECTOR template the User Exit is based on. It is necessary for the correct connection of the User Exit to the processes to be adjusted.
Function module	The name of the User Exit.
No standard	Indicates the User Exit replaces standard functionality in PROCESS DIRECTOR. It means that all code after this User Exit is called is not executed.
	Shortcut to view and edit the User Exit.

Appendix B – User Exits

WORK CYCLE comes with over 60 User Exit interfaces that you can use to customize the application to suit business requirements.

Function module templates for the User Exits can be found in the /COCKPIT/WC_EXIT_SAMPLE function group.

These function modules can be copied and subsequently modified in order to guarantee a stable interface.

Interface structure

The interface structures and the tables in the local interface of the User Exit function templates start with I, E, and C.


Prefix	Description
E	Data is exported only. Changes are possible.

Prefix	Description
I	Data is imported only. Changes are not incorporated.
C	Data can be changed. Changes are possible.

Developing User Exits


1. Select a [User Exit template](#) to use.

The User Exit templates are saved in various /COCKPIT/* function groups.

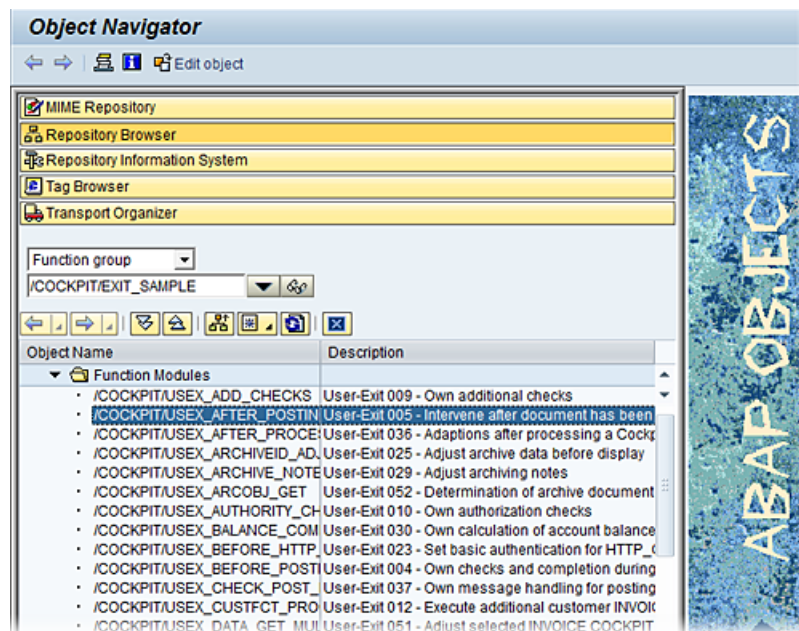

2. Copy template to your own function module.

Use /SE37 to copy and create a new function module.

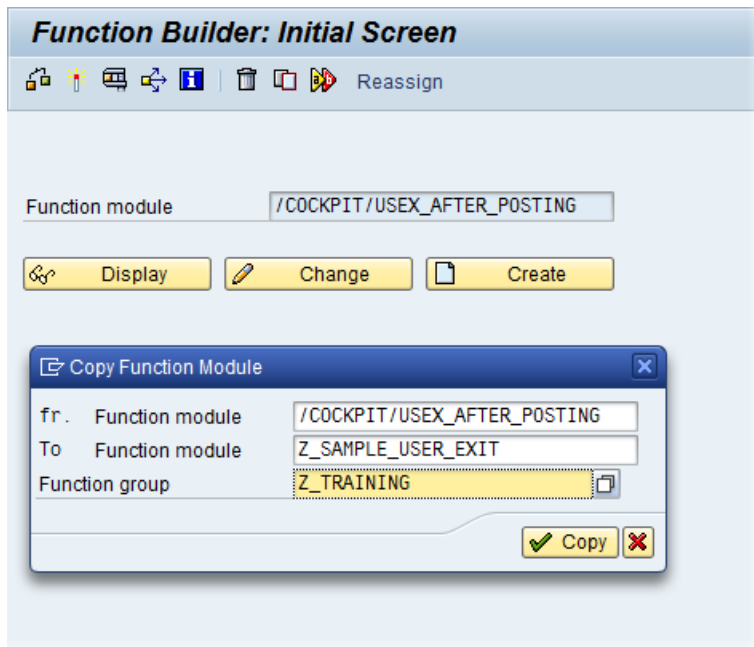

Note: Be sure to copy the function module to your own custom function group.

3. Develop your User Exit code.
4. Activate the User Exit in [/COCKPIT/WI23](#).

Display View "INVOICE COCKPIT user exits": Overview

INVOICE COCKPIT user exits			
User exits	Function Module	No standard	
1	YICS_DEMO_USEX_001	<input type="checkbox"/>	
6	YICS_DEMO_USEX_006	<input type="checkbox"/>	
7	YICS_DEMO_USEX_007	<input type="checkbox"/>	
9	YICS_DEMO_USEX_009	<input type="checkbox"/>	
11	YICS_DEMO_USEX_011	<input type="checkbox"/>	
12	YICS_DEMO_USEX_012	<input type="checkbox"/>	
20	YICS_DEMO_USEX_020	<input type="checkbox"/>	

List of User Exits

Note: This list only includes User Exit interfaces available in the standard transport. Other transports, such as the Business Solution Package (BSP), contain their own fully-developed User Exits. For details on these, refer to the BSP documentation.

User Exit	Name
900	Before starting/continuing a workflow
901	Change WORK CYCLE message texts
902	Determine all WORK CYCLE workflows for one processor
903	Change WORK CYCLE notes and releases to be archived
904	Change subjects of WORK CYCLE messages
905	Own reminder function in WORK CYCLE
906	After starting/continuing a workflow and before saving
907	Custom behavior after workflow reminder
908	Own logic for email at workflow start
909	Define further or different substitutions
910	Own logic for determining user type and email
911	Define further or other substitutes
912	Own or additional logic when sending an email

User Exit	Name
913	When finishing a workflow
914	Adjust call of SAP API for sending emails
915	Adjust/Replace general account assignment block check
916	Adjust/Replace account assignment block check for vendor Ps
917	Data check in the Web Application
918	File upload via the Web Application
919	Calculate workflow validity period (due date)
920	Amend work item creation for SAP Business Workflow
921	Adapt what data the Web Application gets
922	Read the overview data in WORK CYCLE
923	User check during logon to the Web Application
924	Set substitutes for the workflow
925	Set substitutes for SAP users
926	Adapt search help determination for check tables
927	After saving the logon timestamp

User Exit	Name
928	CPD data get
929	CPD data set
930	Reset WORK CYCLE user password
931	Get user data
932	Get user data
933	Get approved documents
934	Manipulate WORK CYCLE flow definition
935	Note check
936	List of possible substitutes
LDAP User Exit 1	Assign LDAP attribute to WORK CYCLE user field
Search help User Exit	Search help for a field in the Web Application
Step User Exit 1	Check step conditions
Step User Exit 2	Determine processor of step
Step User Exit 3	After performing an action

User Exit	Name
Step User Exit 4	After full release
Step User Exit 5	Check step recipient

User Exit 900 – Before starting/continuing a workflow

This User Exit is called before a workflow is started or continued from PROCESS DIRECTOR in the SAP GUI, and is called twice:

- After a user has started the **Send** to workflow action and before the **Start Workflow in WORK CYCLE** dialog appears.

In this case, the User Exit is used to adjust the list of workflows available in the popup window.

- After a user clicks the **Start** button to start a workflow.

In this case, the User Exit is used to prevent a workflow from being started.

Template

```

FUNCTION /COCKPIT/WC_USEX_BEFORE_START.
*''-----
*''*''Local interface:
*'' IMPORTING
*''   REFERENCE(IB_ONLINE) LIKE BOOLE-BOOLE DEFAULT 'X'
*'' EXPORTING
*''   REFERENCE(EC_PROC_WC) LIKE /COCKPIT/THIST-PROCESS
*'' TABLES
*''   IT_ITEM STRUCTURE /COCKPIT/SITEM_IF
*''   IT_ACCOUNT STRUCTURE /COCKPIT/SACCT_IF
*''   IT_TAX STRUCTURE /COCKPIT/STAX_IF
*''   ET_WEBCYCLE STRUCTURE /COCKPIT/SWC_WEBCYCLE
*''   ET_MESSAGE STRUCTURE BAPIRET2
*'' CHANGING

```

Template

```

*"  REFERENCE(EC_WEBCYCLE_ID) LIKE  /COCKPIT/SWC_WEBCYCLE-WC_ID
*"  REFERENCE(ES_HEADER) LIKE  /COCKPIT/SHDR_IF
*"  STRUCTURE      /COCKPIT/SHDR_IF
*"  EXCEPTIONS
*"  ERROR_OCCURED
ENDFUNCTION.

```

Example

The following example prevents the workflow **TestWorkflow** from being started:

```

FUNCTION Z_BL872_WC_USEX_BEFORE_START.
*"-----
***LOCAL INTERFACE:
**      IMPORTING
**          REFERENCE(IB_ONLINE) LIKE  BOOLE-BOOLE DEFAULT 'X'
**      EXPORTING
**          REFERENCE(EC_PROC_WC) LIKE  /COCKPIT/THIST-PROCESS
**      TABLES
**          IT_ITEM STRUCTURE  /COCKPIT/SITEM_IF
**          IT_ACCOUNT STRUCTURE  /COCKPIT/SACCT_IF
**          IT_TAX STRUCTURE  /COCKPIT/STAX_IF
**          ET_WEBCYCLE STRUCTURE  /COCKPIT/SWC_WEBCYCLE
**          ET_MESSAGE STRUCTURE  BAPIRET2
**      CHANGING
**          REFERENCE(EC_WEBCYCLE_ID)
**      LIKE  /COCKPIT/SWC_WEBCYCLE-WC_ID
**          REFERENCE(ES_HEADER) LIKE  /COCKPIT/SHDR_IF
**      STRUCTURE  /COCKPIT/SHDR_IF
**      EXCEPTIONS
**          ERROR_OCCURED

```

[illegible]

User Exit 901 – Change WORK CYCLE message texts

This User Exit is called at the end of all functions which read a text module (for example an email text template) from WORK CYCLE configuration. The User Exit can change the text in any way, with the exception of placeholders, which are replaced with real values before this User Exit is called.

Template
<pre>FUNCTION /COCKPIT/WC_USEX_TEXT_ADAPT. *''----- *''*''Local interface:</pre>

Template

```

*'' IMPORTING
*''  REFERENCE(IS_HEADER) LIKE  /COCKPIT/SHDR_IF STRUCTURE
*''    /COCKPIT/SHDR_IF OPTIONAL
*''  REFERENCE(IS_WEBCYCLE) LIKE  /COCKPIT/SWC_WEBCYCLE STRUCTURE
*''    /COCKPIT/SWC_WEBCYCLE OPTIONAL
*''  REFERENCE(IS_TWC) LIKE  /COCKPIT/TWC STRUCTURE  /COCKPIT/TWC
*''    OPTIONAL
*''  REFERENCE(IS_WC_STEP) LIKE  /COCKPIT/SWC_STEP STRUCTURE
*''    /COCKPIT/SWC_STEP OPTIONAL
*''  REFERENCE(IS_WC_FLOW) LIKE  /COCKPIT/TWCF STRUCTURE
*''    /COCKPIT/TWCF OPTIONAL
*''  REFERENCE(IC_SENDER) LIKE  /COCKPIT/SWC_IF-WC_USER OPTIONAL
*''  REFERENCE(IC_SENDER_TYPE) LIKE  /COCKPIT/TWCS-WC_USERTYPE
*''    OPTIONAL
*''  REFERENCE(IC_DOCU_OBJECT) LIKE  DOKHL-OBJECT OPTIONAL
*''  REFERENCE(IC_FUNCTION) LIKE  TFDIR-FUNCNAME OPTIONAL
*''  REFERENCE(IC_ACTION) LIKE  /COCKPIT/SWC_DUMMY-ACTION_TYPE
*''    OPTIONAL
*'' EXPORTING
*''  REFERENCE(EB_EXIT) LIKE  BOOLE-BOOLE
*'' TABLES
*''  ET_NOTE STRUCTURE  /COCKPIT/SWC_NOTE
ENDFUNCTION.

```

User Exit 902 – Determine all WORK CYCLE workflows for one processor

This User Exit is called at the end of the API function that determines the list of documents that are in WORK CYCLE for a specific user.

Template

```
FUNCTION /cockpit/wc_usex_docs_for_user.
*''-----
*'''' Local interface:
*'' IMPORTING
*''   REFERENCE(IC_USER_TYPE) LIKE  /COCKPIT/TWCS-WC_USERTYPE
*''   REFERENCE(IC_USER) LIKE  /COCKPIT/SWC_IF-WC_USER
*''   REFERENCE(IC_NO_SUBSTITUTION) LIKE  BOOLE-BOOLE
*'' TABLES
*''   CT_WEBCYCLE STRUCTURE  /COCKPIT/SWC_IF
*''   CT_HEADER STRUCTURE  /COCKPIT/SHDR_IF
ENDFUNCTION.
```

User Exit 903 – Change WORK CYCLE notes and releases to be archived

This User Exit is called immediately before the WORK CYCLE workflow log is written to the archive. If the **No standard** flag is set, the standard print functionality that creates an archive document from the actual lines of text is skipped.

Template

```
FUNCTION /cockpit/wc_usex_docs_for_user.
*''-----
*'' IMPORTING
*''   REFERENCE(IS_HEADER) LIKE  /COCKPIT/THDR STRUCTURE
*''   /COCKPIT/THDR
*''   REFERENCE(IB_UPDATETASK) LIKE  BOOLE-BOOLE
*''   REFERENCE(IB_CONNECT_FURTHER) LIKE  BOOLE-BOOLE
```

Template

```

**  REFERENCE(IS_NOTES_CUST) LIKE  /COCKPIT/CNOTES STRUCTURE
**    /COCKPIT/CNOTES
**  EXPORTING
**  REFERENCE(EC_ARC_DOC_TYPE) LIKE  TOADD-DOC_TYPE
**  REFERENCE(EN_LENGTH) LIKE  SAPB-LENGTH
**  REFERENCE(EB_NO_STANDARD) LIKE  BOOLE-BOOLE
**  TABLES
**    CT_TEXT STRUCTURE  /COCKPIT/SWC_NOTE
**    ET_CONTENT STRUCTURE  TBL1024
**    ET_MESSAGES STRUCTURE  BAPIRET2
**  EXCEPTIONS
**    ERROR_OCCURED
ENDFUNCTION.

```

User Exit 904 – Change subjects of WORK CYCLE messages

This User Exit is called during the process of email generation in order to change the email subject. It is called before placeholders in the email subject are replaced.

Template

```

FUNCTION /COCKPIT/WC_USEX_SUBJ_ADAPT.
**  -----
***"Local interface:
**  IMPORTING
**  REFERENCE(IS_HEADER) LIKE  /COCKPIT/SHDR_IF STRUCTURE
**    /COCKPIT/SHDR_IF OPTIONAL
**  REFERENCE(IC_SENDER) LIKE  /COCKPIT/SWC_IF-WC_USER OPTIONAL
**  REFERENCE(IC_SENDER_TYPE) LIKE  /COCKPIT/SWC_IF-WC_USERTYPE
**  OPTIONAL

```

Template

```

** REFERENCE(IC_WC_NAME) LIKE /COCKPIT/SWC_WEBCYCLE-WC_NAME
** OPTIONAL
** REFERENCE(IC_WC_STEP_NAME) LIKE /COCKPIT/SWC_STEP-WC_STEP_NAME
** OPTIONAL
** REFERENCE(IC_RECEIVER) LIKE /COCKPIT/SWC_IF-WC_USER OPTIONAL
** REFERENCE(IC_RECEIVER_TYPE) LIKE /COCKPIT/SWC_IF-WC_USERTYPE
** OPTIONAL
** REFERENCE(IS_WC_FLOW) LIKE /COCKPIT/TWCF STRUCTURE
** /COCKPIT/TWCF OPTIONAL
** REFERENCE(IN_DUE_DAYS) LIKE /COCKPIT/SWC_STEP-WC_DUE_DAYS
** OPTIONAL
** EXPORTING
** REFERENCE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
** CHANGING
** REFERENCE(EC_EMAIL_SUBJ) LIKE /COCKPIT/CWC_STT-WC_EMAIL_SUBJ
ENDFUNCTION.

```

User Exit 905 – Own reminder function in WORK CYCLE

This User Exit makes it possible to implement a specific due date check on a workflow step. If the **No standard** flag is set, the standard send email functionality is skipped.

Template

```

FUNCTION /COCKPIT/WC_USEX_REMINDER.
** -----
*** Local interface:
** IMPORTING
** REFERENCE(IS_WC_STEP) LIKE /COCKPIT/TWCS STRUCTURE
** /COCKPIT/TWCS

```

Template
<pre> ** REFERENCE(IS_HEADER) LIKE /COCKPIT/THDR STRUCTURE ** /COCKPIT/THDR ** REFERENCE(IS_WEBCYCLE) LIKE /COCKPIT/SWC_WEBCYCLE STRUCTURE ** /COCKPIT/SWC_WEBCYCLE ** REFERENCE(IS_WC_STEP_CUST) LIKE /COCKPIT/SWC_STEP STRUCTURE ** /COCKPIT/SWC_STEP ** REFERENCE(IS_WC_DATE_SEL) LIKE /COCKPIT/SWC_DATE_SELECTION ** STRUCTURE /COCKPIT/SWC_DATE_SELECTION OPTIONAL ** REFERENCE(IB_COLL_MAIL_SEL) LIKE BOOLE-BOOLE OPTIONAL ** REFERENCE(IC_REC_USER_SEL) LIKE /COCKPIT/TWC_CML-WC_REC_USR ** OPTIONAL ** REFERENCE(IC_REC_USERTYPE_SEL) LIKE ** /COCKPIT/TWC_CML-WC_REC_USR_TYPE OPTIONAL ** REFERENCE(IC_SUBMIT) LIKE BOOLE-BOOLE DEFAULT SPACE ** EXPORTING ** REFERENCE(EB_NO_STANDARD) LIKE BOOLE-BOOLE ** TABLES ** ET_MESSAGES STRUCTURE BAPIRET2 ENDFUNCTION.</pre>

User Exit 906 – After starting/continuing a workflow and before saving

This User Exit is called after a workflow step has been started but before the workflow information changed by the start procedure has been written to the database. If the **No standard** flag is set, the standard database update is skipped.

Template
<pre> FUNCTION /COCKPIT/WC_USEX_AFTER_START. ** -----</pre>

Template

```

*** Local interface:
** IMPORTING
**   REFERENCE(IB_ONLINE) LIKE BOOLE-BOOLE DEFAULT CON_TRUE
** TABLES
**   ET_WC_FLOW STRUCTURE /COCKPIT/TWCF OPTIONAL
**   ET_WC_FLOW_NOTE STRUCTURE /COCKPIT/TWCFN OPTIONAL
**   IT_WC_STEP_DEF STRUCTURE /COCKPIT/SWC_STEP OPTIONAL
**   ET_MESSAGE STRUCTURE BAPIRET2 OPTIONAL
** CHANGING
**   REFERENCE(ES_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
**     /COCKPIT/SHDR_IF OPTIONAL
**   REFERENCE(ES_WEBCYCLE) LIKE /COCKPIT/TWC STRUCTURE
**     /COCKPIT/TWC OPTIONAL
** EXCEPTIONS
**   ERROR_OCCURED
ENDFUNCTION.

```

User Exit 907 – Custom behavior after workflow reminder

This User Exit allows the implementation of customer-specific logic for a workflow reminder email. It is possible to define rules to control the message dispatch.

Template

```

FUNCTION /COCKPIT/WC_USEX_AFTER_REMIND.
** -----
*** Local interface:
** IMPORTING
**   REFERENCE(IC_SUBMIT) LIKE BOOLE-BOOLE DEFAULT SPACE

```

Template

```

*" TABLES
*"   ET_MESSAGES STRUCTURE BAPIRET2 OPTIONAL
ENDFUNCTION.

```

User Exit 908 – Own logic for email at workflow start

This User Exit is called before a workflow email is sent out when a workflow step is started. If the **No standard** flag is set, the standard send email function is skipped.

Template

```

FUNCTION /COCKPIT/WC_USEX_START_MAIL.
*" -----
*"**"Local interface:
*" IMPORTING
*"   REFERENCE(IB_ONLINE) LIKE BOOLE-BOOLE DEFAULT CON_TRUE
*" EXPORTING
*"   REFERENCE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
*" TABLES
*"   IT_ITEM STRUCTURE /COCKPIT/SITEM_IF OPTIONAL
*"   IT_ACCOUNT STRUCTURE /COCKPIT/SACCT_IF OPTIONAL
*"   IT_TAX STRUCTURE /COCKPIT/STAX_IF OPTIONAL
*"   ET_NOTE STRUCTURE /COCKPIT/SWC_NOTE OPTIONAL
*"   ET_MESSAGE STRUCTURE BAPIRET2 OPTIONAL
*" CHANGING
*"   REFERENCE(ES_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
*"   /COCKPIT/SHDR_IF OPTIONAL
*"   REFERENCE(ES_WEBCYCLE) LIKE /COCKPIT/TWC STRUCTURE
*"   /COCKPIT/TWC OPTIONAL
*"   REFERENCE(ES_WC_FLOW) LIKE /COCKPIT/TWCF STRUCTURE

```

Template

```

**      /COCKPIT/TWCF OPTIONAL
**      REFERENCE(ES_WC_STEP_DEF) LIKE  /COCKPIT/SWC_STEP STRUCTURE
**      /COCKPIT/SWC_STEP OPTIONAL
**      EXCEPTIONS
**      ERROR_OCCURED
ENDFUNCTION.

```

User Exit 909 – Define further or different substitutions

This User Exit is called at the beginning of the function that determines the substitution definitions of a workflow processor. If the **No standard** flag is set, the standard substitution determination procedure is skipped.

Template

```

FUNCTION /COCKPIT/WC_USEX_SUBST_GET.
** -----
**"Local interface:
**  IMPORTING
**    REFERENCE(I_USER) LIKE  /COCKPIT/TWCS-WC_USER
**    REFERENCE(I_USER_TYPE) LIKE  /COCKPIT/TWCS-WC_USERTYPE
**    REFERENCE(I_DATE) LIKE  SY-DATUM OPTIONAL
**    REFERENCE(IB_INACTIVE) LIKE  BOOLE-BOOLE OPTIONAL
**  EXPORTING
**    REFERENCE(EB_NO_STANDARD) LIKE  BOOLE-BOOLE
**    REFERENCE(ES_MESSAGE) LIKE  BAPIRET2 STRUCTURE BAPIRET2
**  TABLES
**    ET_SUBSTITUTION STRUCTURE  /COCKPIT/S_SUBSTITUTION
**  EXCEPTIONS
**    NOT_FOUND

```

Template

```
ENDFUNCTION.
```

User Exit 910 – Own logic for determining user type and email

This User Exit is called at the beginning of the function that determines the user type from a user ID or the user type and the user ID from an email address. If the **No standard** flag is set, the standard procedure for user (type) determination is skipped.

Template

```
FUNCTION /COCKPIT/WC_USEX_USRTYPE_GET.
*''-----
*''*''Local interface:
*'' IMPORTING
*''   REFERENCE(I_USER_EMAIL) LIKE /COCKPIT/TWC_UMP-EMAIL
*''   REFERENCE(I_USER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE OPTIONAL
*'' EXPORTING
*''   REFERENCE(ES_MESSAGE) LIKE BAPIRET2 STRUCTURE BAPIRET2
*''   REFERENCE(EC_USER_TYPE) LIKE /COCKPIT/SIF-US_TYPE
*''   REFERENCE(EC_WC_USER) LIKE /COCKPIT/TWC_UMP-WC_USER
*''   REFERENCE(EC_SAP_USER) LIKE USR02-BNAME
*''   REFERENCE(EC_EMAIL) LIKE /COCKPIT/TWC_UMP-EMAIL
*''   REFERENCE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
*'' EXCEPTIONS
*''   USER_DOESNT_EXIST
*''   NO_EMAIL_ADDRESS
ENDFUNCTION.
```

User Exit 911 – Define further or other substitutes

This User Exit is called at the beginning of the function that determines the substitutes of a workflow processor. If the **No standard** flag is set, the standard procedure for substitute determination is skipped.

Template

```

FUNCTION /COCKPIT/WC_USEX_SUBTE_GET.
*''-----
*''*''Local interface:
*'' IMPORTING
*''   REFERENCE(I_USER) LIKE /COCKPIT/TWCS-WC_USER
*''   REFERENCE(I_USER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE
*''   REFERENCE(I_DATE) LIKE SY-DATUM OPTIONAL
*''   REFERENCE(IC_READ_ACTIVE) LIKE /COCKPIT/S_SUBSTITUTION-ACTIVE
*''   DEFAULT CON_WC_SUBST_ACTIVE
*'' EXPORTING
*''   REFERENCE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
*''   REFERENCE(ES_MESSAGE) LIKE BAPIRET2 STRUCTURE BAPIRET2
*'' TABLES
*''   ET_SUBSTITUTION STRUCTURE /COCKPIT/S_SUBSTITUTION
*'' EXCEPTIONS
*''   NOT_FOUND
ENDFUNCTION.

```

User Exit 912 – Own or additional logic when sending an email

This User Exit is called at the beginning of the function that sends emails during workflow processing. If the **No standard** flag is set, the standard procedure for sending emails is skipped.

Template

```

FUNCTION /COCKPIT/WC_USEX_SEND_MAIL.
*''-----

```

Template

```

***"Local interface:
** EXPORTING
**  REFERENCE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
** TABLES
**  CT_NOTE STRUCTURE /COCKPIT/SWC_NOTE OPTIONAL
**  CT_MAILTEXT STRUCTURE SOLISTI1 OPTIONAL
**  CT_MESSAGES STRUCTURE BAPIRET2
** CHANGING
**  REFERENCE(CC_SENDER) LIKE SOXDA-ADDRESS
**  REFERENCE(CC_SENDER_TYPE) LIKE SOEXTRECI1-ADR_TYP
**  REFERENCE(CC_RECEIVER) LIKE BAPIADDR1-E_MAIL
**  REFERENCE(CC_RECEIVER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE
**  REFERENCE(CC_WC_REC_USR) LIKE /COCKPIT/TWC_CML-WC_REC_USR
**  REFERENCE(CC_WC_REC_USR_TYPE) LIKE
**    /COCKPIT/TWC_CML-WC_REC_USR_TYPE
**  REFERENCE(CC_MAILOBJECT) LIKE MCMAILOBJ-OBJNAM
**  REFERENCE(CC_MAILDESCRIPTION) LIKE MCMAILOBJ-OBJDES
**  REFERENCE(CC_ATTACHMENT_GUID) LIKE /COCKPIT/THDR-INVOICE_GUID
**  REFERENCE(CC_WC_STEP_ID) LIKE /COCKPIT/CWC_STP-WC_STEP_ID
**  REFERENCE(CC_TEXT_TYPE) LIKE /COCKPIT/CTXTYP-TEXT_TYPE
**  REFERENCE(CC_USER) LIKE /COCKPIT/TTXTHDR-CR_USER
**  REFERENCE(CC_USERTYPE) LIKE /COCKPIT/TTXTHDR-CR_USERTYPE
**  REFERENCE(CB_ATTACHMENT) LIKE BOOLE-BOOLE
**  REFERENCE(CB_CREATE_NOTE) LIKE BOOLE-BOOLE
**  REFERENCE(CB_SUBSTITUTE) LIKE BOOLE-BOOLE
ENDFUNCTION.

```

User Exit 913 – When finishing a workflow

This User Exit is called after a workflow is completed, that is, when the document is released (or rejected) and is no longer in the **In workflow** status.

Template

```

FUNCTION /COCKPIT/WC_USEX_FINISHED.
*'' -----
*''*'' Local interface:
*'' IMPORTING
*''   REFERENCE(IS_WC_DATA) LIKE  /COCKPIT/SWC_IF STRUCTURE
*''   /COCKPIT/SWC_IF
*''   REFERENCE(IS_WEBCYCLE) LIKE /COCKPIT/SWC_WEBCYCLE STRUCTURE
*''   /COCKPIT/SWC_WEBCYCLE
*''   REFERENCE(IS_WC_STEP) LIKE /COCKPIT/SWC_STEP STRUCTURE
*''   /COCKPIT/SWC_STEP
*''   REFERENCE(IB_ONLINE) LIKE  BOOLE-BOOLE OPTIONAL
*'' TABLES
*''   ET_MESSAGE STRUCTURE  BAPIRET2
*'' CHANGING
*''   REFERENCE(ES_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
*''   /COCKPIT/SHDR_IF
*''   REFERENCE(ES_WEBCYCLE) LIKE /COCKPIT/TWC STRUCTURE
*''   /COCKPIT/TWC
*'' EXCEPTIONS
*''   ERROR_OCCURED
ENDFUNCTION.

```

User Exit 914 – Adjust call of SAP API for sending emails

With this user exit it is possible to adjust almost every parameter of the email (for example, the subject and sender).

Template

```

FUNCTION /COCKPIT/WC_USEX_API_MAIL.
*''-----
*'''' Local interface:
*'' TABLES
*''   CT_PACKING_LIST STRUCTURE  SOPCKLST11 OPTIONAL
*''   CT_OBJECT_HEADER STRUCTURE  SOLIST11 OPTIONAL
*''   CT_CONTENTS_BIN STRUCTURE  SOLIX OPTIONAL
*''   CT_CONTENTS_TXT STRUCTURE  SOLIST11 OPTIONAL
*''   CT_RECEIVERS STRUCTURE  SOMLREC11 OPTIONAL
*''   CT_MESSAGES STRUCTURE  BAPIRET2
*'' CHANGING
*''   REFERENCE(CS_DOCUMENT_DATA) LIKE  SODOCCHG11 STRUCTURE
*''       SODOCCHG11
*''   REFERENCE(CC_PUT_IN_OUTBOX) LIKE  SONV-FLAG DEFAULT SPACE
*''   REFERENCE(CC_SENDER_ADDRESS) LIKE  SOEXTREC11-RECEIVER OPTIONAL
*''   REFERENCE(CC_SENDER_ADDRESS_TYPE) LIKE  SOEXTREC11-ADR_TYP
*''   DEFAULT 'B'
ENDFUNCTION.
*''-----
* !! IMPORTANT !!
* For TABLES parameter CT_CONTENTS_BIN you can use
* - on systems lower than 4.7 - STRUCTURE SOLIST11 or STRUCTURE SOLIX
* - on systems 4.7 and higher - STRUCTURE SOLIX

```


User Exit 915 – Adjust/Replace general account assignment block check

This User Exit provides an interface to disable or adjust the General Account Assignment Block check (COBL check). The main purpose for this user exit is to disable the COBL check under certain circumstances. For example, in the case when posted and unposted documents are sent into the same workflow but only unposted documents must be checked according to COBL rules. In addition, this user exit can be used to adjust COBL checks and also created messages.

Template

```

FUNCTION /COCKPIT/WC_USEX_CHECK_COBL.
*''-----
*''** Local interface:
*'' IMPORTING
*''   REFERENCE(IS_ACCOUNT) LIKE /COCKPIT/SACCT_IF STRUCTURE
*''   /COCKPIT/SACCT_IF
*''   REFERENCE(IS_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
*''   /COCKPIT/SHDR_IF
*'' EXPORTING
*''   REFERENCE(EC_NO_STANDARD) LIKE BOOLE-BOOLE
*'' TABLES
*''   CT_MESSAGES STRUCTURE BAPIRET2
*''   CT_COBL_MSEG STRUCTURE MSEG
*'' CHANGING
*''   REFERENCE(CS_COBL) LIKE COBL STRUCTURE COBL
ENDFUNCTION.

```

User Exit 916 – Adjust/Replace account assignment block check for vendor

This User Exit provides an interface to disable or adjust the Accounts Payable Coding Block check (COBL_INT check). The main purpose for this user exit is to disable this check under certain circumstances or to modify the data before the checking is performed. If the **No standard** flag is set, the standard check is replace. If the flag is not set, the User Exit is executed in addition to (and before) the standard check.

Template

```
FUNCTION /COCKPIT/WC_USEX_CHECK_APCOBL.  
*''-----  
  
*''*' Local interface:  
  
*'' IMPORTING  
  
*''   REFERENCE(IS_ACCOUNT) LIKE  /COCKPIT/SACCT_IF STRUCTURE  
*''       /COCKPIT/SACCT_IF  
  
*''   REFERENCE(IS_HEADER) LIKE  /COCKPIT/SHDR_IF STRUCTURE  
*''       /COCKPIT/SHDR_IF  
  
*'' EXPORTING  
  
*''   REFERENCE(EC_NO_STANDARD) LIKE  BOOLE-BOOLE  
  
*'' TABLES  
  
*''   CT_COBL_AP STRUCTURE ACIDLPAYCK  
*''   CT_MESSAGES STRUCTURE BAPIRET2  
*''   CT_COBL_MSEG STRUCTURE MESG  
  
ENDFUNCTION.  
*''-----  
  
*>>> START OF IMPLEMENTATION >>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>*  
  
* This example implementation removes the message 'Transaction CO  
* Through-postings from FI has been locked' ('Der Vorgang  
* CO-Durchbuchung aus FiBu wurde gesperrt') from ct_cobl_mseg  
  
DATA:  
  
    ls_txt LIKE tj01t-txt,
```

Template

[illegible]

User Exit 917 – Data check in the Web Application

This User Exit provides an interface to disable, modify or replace the standard data checks which are performed when a user saves a document in the Web Application. If the **No standard** flag is set, the User Exit replaces the standard checks. If the flag is not set, it is executed in addition to and after the standard checks.

Template

```

FUNCTION /cockpit/wc_usex_data_check.

**-----
**
*** Local interface:
**
** IMPORTING
**
** REFERENCE(IS_WEBCYCLE) LIKE /COCKPIT/SWC_IF STRUCTURE
**
** /COCKPIT/SWC_IF
**
** REFERENCE(IS_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE

```

Template

[illegible]

User Exit 918 – File upload via the Web Application

This User Exit is called when a user uploads an attachment from the detail view of a document in the Web Application. In the user exit it is possible to perform some action on the attachment data, for example, evaluating the attachment data to update the document. If the **No standard** flag is set, the upload is cancelled. If it is not set, the uploaded attachment is archived and connected to the current document.

Template

```

FUNCTION /COCKPIT/WC_USEX_FILE_UPLOAD .
*''-----
*''*''Local interface:
*'' IMPORTING
*''  REFERENCE(IC_AR_OBJECT) LIKE /COCKPIT/SWC_UPLOADS-AR_OBJECT
*''  REFERENCE(IC_GUID) LIKE /COCKPIT/SIF-INVOICE_GUID
*''  REFERENCE(IC_DOCNO) LIKE /COCKPIT/SIF-DOCNO
*''  REFERENCE(IN_CONTENT_LENGTH) LIKE SAPB-LENGTH
*''  REFERENCE(IB_INVOICE_IMAGE) LIKE BOOLE-BOOLE OPTIONAL
*'' EXPORTING
*''  REFERENCE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
*''  REFERENCE(EB_COMMIT_WORK) LIKE BOOLE-BOOLE
*'' TABLES
*''  IT_CONTENT STRUCTURE TBL1024
*''  IT_TEXT STRUCTURE DOCS OPTIONAL
*''  ET_MESSAGES STRUCTURE BAPIRET2 OPTIONAL
*'' EXCEPTIONS
*''  ERROR_OCCURED
ENDFUNCTION.

```

User Exit 919 – Calculate workflow validity period (due date)

This User Exit provides an interface to calculate the validity period (due date) of a workflow step. The purpose of the validity date is to check it against the configuration of the workflow in order to declare a workflow step overdue or not. The User Exit is called before the standard calculations are done, so it can either modify the values used for calculation or it can do the calculation completely. In the latter case you must check the **No standard** flag to skip the standard processing.

Template

```

FUNCTION /cockpit/wc_usex_get_due_date.
*''-----
*'''''Local interface:
*'' IMPORTING
*''   REFERENCE(IS_WEBCYCLE) LIKE /COCKPIT/SWC_WEBCYCLE STRUCTURE
*''   /COCKPIT/SWC_WEBCYCLE
*''   REFERENCE(IS_WEBCYCLE_STEP) LIKE /COCKPIT/SWC_STEP STRUCTURE
*''   /COCKPIT/SWC_STEP
*''   REFERENCE(IS_FLOW) LIKE /COCKPIT/TWCF STRUCTURE /COCKPIT/TWCF
*''   REFERENCE(IS_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
*''   /COCKPIT/SHDR_IF
*''   VALUE(IB_CONTINUE) LIKE BOOLE-BOOLE
*'' EXPORTING
*''   VALUE(ED_DUE_DATE) LIKE /COCKPIT/TWCS-WC_DUEDATE
*''   VALUE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
*''   VALUE(ED_STEP_DUE_DATE) LIKE /COCKPIT/TWCS-WC_DUEDATE
*'' TABLES
*''   ET_MESSAGES STRUCTURE BAPIRET2
*'' CHANGING
*''   VALUE(CD_DATE) LIKE SY-DATLO DEFAULT SY-DATLO
*''   VALUE(CN_DUE_DAYS) LIKE /COCKPIT/CWC_ID-WC_DUE_DAYS
*''   VALUE(CN_STEP_DUE_DAYS) LIKE /COCKPIT/CWC_STP-WC_DUE_DAYS
*''   VALUE(CD_PROPOSAL) LIKE /COCKPIT/TWCS-WC_DUEDATE

```

Template

```

**  VALUE(CD_STEP_PROPOSAL) LIKE  /COCKPIT/TWCS-WC_DUEDATE
**  EXCEPTIONS
**  DUE_DATE_UNREACHABLE
ENDFUNCTION.

```

User Exit 920 – Amend work item creation for SAP Business Workflow

When a workflow is started, a work item for the SAP Business Workplace is created. This User Exit provides the possibility to modify the data that is used to create this work item. If the **No standard** flag is set, the standard function to create the work item is not called.

Template

```

FUNCTION /COCKPIT/WC_USEX_WORKITEM.
**  -----
**  Local interface:
**  IMPORTING
**  REFERENCE(IB_ONLINE) LIKE  BOOLE-BOOLE DEFAULT CON_TRUE
**  EXPORTING
**  REFERENCE(EB_NO_STANDARD) LIKE  BOOLE-BOOLE
**  TABLES
**  IT_ITEM STRUCTURE  /COCKPIT/SITEM_IF OPTIONAL
**  IT_ACCOUNT STRUCTURE  /COCKPIT/SACCT_IF OPTIONAL
**  IT_TAX STRUCTURE  /COCKPIT/STAX_IF OPTIONAL
**  ET_NOTE STRUCTURE  /COCKPIT/SWC_NOTE OPTIONAL
**  ET_MESSAGE STRUCTURE  BAPIRET2 OPTIONAL
**  CHANGING
**  REFERENCE(ES_HEADER) LIKE  /COCKPIT/SHDR_IF STRUCTURE
**  /COCKPIT/SHDR_IF OPTIONAL
**  REFERENCE(ES_WEBCYCLE) LIKE  /COCKPIT/TWC STRUCTURE

```

Template

```

*'' /COCKPIT/TWC OPTIONAL
*'' REFERENCE(ES_WC_FLOW) LIKE /COCKPIT/TWCF STRUCTURE
*'' /COCKPIT/TWCF OPTIONAL
*'' REFERENCE(ES_WC_STEP_DEF) LIKE /COCKPIT/SWC_STEP STRUCTURE
*'' /COCKPIT/SWC_STEP OPTIONAL
*'' EXCEPTIONS
*'' ERROR_OCCURED
ENDFUNCTION.

```

User Exit 921 – Adapt what data the Web Application gets

This User Exit is called after the complete document data is read upon a “data get” call from the Web Application. All document data is available and can be modified in any way. The User Exit call is the last statement in the “data get” RFC. Therefore, ensure that the messages table is properly filled. And do not raise an exception.

Template

```

FUNCTION /cockpit/wc_usex_rfc_data_get.
*'' -----
*'' Local interface:
*'' IMPORTING
*'' REFERENCE(IC_GUID) LIKE /COCKPIT/SIF-INVOICE_GUID OPTIONAL
*'' REFERENCE(IC_WC_ID) LIKE /COCKPIT/SWC_IF-WC_ID OPTIONAL
*'' REFERENCE(IC_WC_STEP_ID) LIKE /COCKPIT/SWC_IF-WC_STEP_ID
*'' OPTIONAL
*'' REFERENCE(IN_WC_SUBPOS) LIKE /COCKPIT/SWC_IF-WC_SUBPOS DEFAULT
*'' 999
*'' REFERENCE(IC_USER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE OPTIONAL
*'' REFERENCE(IC_USER) LIKE /COCKPIT/SWC_IF-WC_USER OPTIONAL
*'' REFERENCE(IC_GET_CONTENT) LIKE COMMS-COMMIT_SW DEFAULT

```


Template

```

*|| CON_FALSE
*|| REFERENCE(IC_ENQUEUE) LIKE COMMS-COMMIT_SW DEFAULT CON_FALSE
*|| REFERENCE(IB_ALL_NOTES) LIKE BOOLE-BOOLE DEFAULT CON_FALSE
*|| REFERENCE(IB_HISTORY) LIKE BOOLE-BOOLE DEFAULT CON_FALSE
*|| REFERENCE(IC_LANGUAGE) LIKE SY-LANGU DEFAULT SY-LANGU
*|| REFERENCE(IB_CONVERT) LIKE BOOLE-BOOLE DEFAULT CON_FALSE
*|| REFERENCE(IC_WC_APPL) LIKE /COCKPIT/CWC_ID-WC_APPL DEFAULT
*|| SPACE
*|| REFERENCE(IC_ACTION) LIKE /COCKPIT/SWC_DUMMY-ACTION_TYPE
*|| OPTIONAL
*|| REFERENCE(IC_CALLER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE
*|| OPTIONAL
*|| REFERENCE(IC_CALLER) LIKE /COCKPIT/SWC_IF-WC_USER OPTIONAL
*|| REFERENCE(IB_IMAGE_DATA) LIKE BOOLE-BOOLE DEFAULT CON_FALSE
*|| TABLES
*|| ET_ITEM STRUCTURE /COCKPIT/SITEM_IF OPTIONAL
*|| ET_TAX STRUCTURE /COCKPIT/STAX_IF OPTIONAL
*|| ET_ACCOUNT STRUCTURE /COCKPIT/SACCT_IF OPTIONAL
*|| ET_NOTICE STRUCTURE /COCKPIT/SWEBCYCLE_NOTE OPTIONAL
*|| ET_CONTENT STRUCTURE TBL1024 OPTIONAL
*|| ET_MESSAGES STRUCTURE BAPIRET2 OPTIONAL
*|| ET_EMAIL STRUCTURE /COCKPIT/SWC_NOTE OPTIONAL
*|| ET_FORMS STRUCTURE /COCKPIT/CWC_STF OPTIONAL
*|| ET_ARC_DOCS STRUCTURE /COCKPIT/SWC_ARC_DOCS OPTIONAL
*|| ET_ACCAS STRUCTURE /COCKPIT/TACCAS OPTIONAL
*|| ET_NOTE_HDA STRUCTURE /COCKPIT/SWC_NOTE_HDA OPTIONAL
*|| ET_NOTE_BOD STRUCTURE /COCKPIT/SWC_NOTE_BOD OPTIONAL
*|| ET_ACCAS_PO STRUCTURE /COCKPIT/TACCAS OPTIONAL

```

Template

[illegible]

User Exit 922 – Read the overview data in WORK CYCLE

After the user has logged on to the Web Application, an RFC is called to get the list of documents available for the current user. If document GUIDs are passed here, only the documents matching the GUID exactly appear in the list. This User Exit is called at the beginning of the RFC. If the **No standard** flag is set, the User Exit replaces this standard call. If the flag is not set, the User Exit can be used to modify some changeable parameters

Template

```

FUNCTION /cockpit/wc_usex_get_multi.
*''-----
*'''' Local interface:
*'' TABLES
*''   ET_HEADER STRUCTURE /COCKPIT/SHDR_IF
*''   ET_WEBCYCLE STRUCTURE /COCKPIT/SWC_IF
*''   ET_MESSAGES STRUCTURE BAPIRET2
*'' CHANGING
*''   REFERENCE(CC_USER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE OPTIONAL
*''   REFERENCE(CC_USER) LIKE /COCKPIT/SWC_IF-WC_USER OPTIONAL
*''   REFERENCE(CC_GUID) LIKE /COCKPIT/SIF-INVOICE_GUID OPTIONAL
*''   REFERENCE(CC_LANGUAGE) LIKE SY-LANGU OPTIONAL
*''   REFERENCE(CB_CONVERT) LIKE BOOLE-BOOLE DEFAULT CON_FALSE
*''   REFERENCE(CB_SUBSTITUTE) LIKE BOOLE-BOOLE DEFAULT CON_FALSE
*''   REFERENCE(CB_NO_STANDARD) LIKE BOOLE-BOOLE OPTIONAL
*'' EXCEPTIONS
*''   ERROR_OCCURED
ENDFUNCTION.

```

User Exit 923 – User check during logon to the Web Application

This User Exit provides the possibility to authenticate a user when logging on to the Web Application using the user ID and password. The user ID is passed as IC_USER_EMAIL and the password as IC_PASSWORD. If the **No standard** flag is set, the User Exit replaces the standard authentication. If so, the User Exit must not only verify the existence of the user and the correctness of the password, but also must determine the user ID, the user type and the user language.

The User Exit is also called when a user changes the password in the Web Application. In this case, user ID and type are already known, so they are passed instead of IC_USER_EMAIL. IC_NEWPASSWORD is filled with the new password specified by the user.

If you are using the PROCESS DIRECTOR (blue) Web Application, you must also activate the **User logon** BAdI implementation /EBY/ICWC_USER_LOGON. See the *PROCESS DIRECTOR Advanced Configuration Guide* for information on this BAdI.

Template

```

FUNCTION /COCKPIT/WC_USEX_RFC_USER_CHK.
*''-----
*'''' Local interface:
*'' IMPORTING
*''   VALUE(IC_USER_EMAIL) LIKE /COCKPIT/TWC_UMP-EMAIL
*''   VALUE(IC_USER) LIKE /COCKPIT/TWCS-WC_USER OPTIONAL
*''   VALUE(IC_USER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE OPTIONAL
*''   VALUE(IC_PASSWORD) LIKE /COCKPIT/SWC_DUMMY-PWD
*''   VALUE(IC_NEWPASSWORD) LIKE /COCKPIT/SWC_DUMMY-PWD OPTIONAL
*'' EXPORTING
*''   VALUE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
*''   VALUE(EC_USER) LIKE /COCKPIT/TWCS-WC_USER
*''   VALUE(EC_USER_TYPE) LIKE /COCKPIT/SIF-US_TYPE
*''   VALUE(EC_USER_LANGUAGE) LIKE T002-LAISO
*''   VALUE(ES_MESSAGE) LIKE BAPIRET2 STRUCTURE BAPIRET2
*''   VALUE(ED_LDATE) LIKE BAPIUSW01-LDATE
*''   VALUE(ED_LTIME) LIKE BAPIUSW01-LTIME

```

Template

```
ENDFUNCTION.
```

```
*"-----
```

```
* IC_NEWPASSWORD is the flag to check whether the user exit is called
```

```
* from /COCKPIT/WC_RFC_USER_CHECK or /COCKPIT/WC_USER_PW_CHANGE
```

User Exit 924 – Set substitutes for the workflow

This User Exit is called when a user creates/changes/deletes a substitution setting using the Web Application. A substitution setting consists of User ID, User Type, From data, To data and a flag to indicate if the substitution type is passive or active. If the **No standard** flag is set, the standard processing for setting substitutes is skipped.

Template

```
FUNCTION /COCKPIT/WC_USEX_WEB_SUB_SET.
```

```
*"-----
```

```
*"*** Local interface:
```

```
*" IMPORTING
```

```
*" REFERENCE(I_USER) LIKE /COCKPIT/TWCS-WC_USER
```

```
*" REFERENCE(I_USER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE
```

```
*" REFERENCE(I_SUBS_USER_EMAIL) LIKE /COCKPIT/TWC_UMP-EMAIL
```

```
*" REFERENCE(I_SUBS_USER) LIKE /COCKPIT/TWCS-WC_USER OPTIONAL
```

```
*" REFERENCE(I_SUBS_USER_TYPE) LIKE /COCKPIT/TWCS-WC_USERTYPE
```

```
*" OPTIONAL
```

```
*" REFERENCE(I_VALID_FROM) LIKE /COCKPIT/TWC_UMS-VALID_TO
```

```
*" REFERENCE(I_VALID_TO) LIKE /COCKPIT/TWC_UMS-VALID_TO
```

```
*" REFERENCE(I_ACTIVE) LIKE /COCKPIT/TWC_UMS-ACTIVE
```

```
*" REFERENCE(I_DELETE) LIKE BOOLE-BOOLE DEFAULT SPACE
```

```
*" REFERENCE(IB_CURRENT_ONLY) LIKE BOOLE-BOOLE DEFAULT CON_TRUE
```

```
*" REFERENCE(LB_NO_STANDARD) LIKE BOOLE-BOOLE
```

```
*" TABLES
```

Template
<pre> ** ET_MESSAGES STRUCTURE BAPIRET2 OPTIONAL ** ** EXCEPTIONS ** ** OTHERS ENDFUNCTION.</pre>

User Exit 925 – Set substitutes for SAP users

This User Exit is called when an SAP user creates/changes/deletes a substitution setting using WORK CYCLE in the SAP GUI. If the **No standard** flag is set, the standard procedure for setting substitutes is skipped.

[illegible]

User Exit 926 – Adapt search help determination for check tables

This User Exit is called when a “check table”-based value search is called from the Web Application. The User Exit can override settings from the search help configuration in order to influence the search behavior.

Template

```
FUNCTION /COCKPIT/WC_USEX_SHLP_BYTABLE.
*''-----
*''*'' Local interface:
*'' IMPORTING
*''   REFERENCE(IC_STRUCTURE) LIKE /COCKPIT/SFIELDS-STRUCTURE
*''   REFERENCE(IC_FIELD_NAME) LIKE /COCKPIT/SFIELDS-FIELD_SAP
*''   REFERENCE(IC_INVOICE_GUID) LIKE /COCKPIT/THDR-INVOICE_GUID
*''   OPTIONAL
*''   REFERENCE(IC_COMP_CODE) LIKE /COCKPIT/SHDR_IF-COMP_CODE
*''   OPTIONAL
*'' EXPORTING
*''   REFERENCE(EC_TABNAME) LIKE DFIES-TABNAME
*''   REFERENCE(ES_SHLP_TAB) LIKE /COCKPIT/CWCSHSH STRUCTURE
*''   /COCKPIT/CWCSHSH
ENDFUNCTION.
```

User Exit 927 – After saving the logon timestamp

This User Exit is called after the logon date/time for a Web Application user has been saved.

Template

```
FUNCTION /COCKPIT/WC_USEX_LOGON_SET.
*''-----
*''*'' Local interface:
*'' IMPORTING
```

Template

```

*'' REFERENCE(IC_USER) LIKE /COCKPIT/TWCS-WC_USER
*'' REFERENCE(IC_USER_TYPE) LIKE /COCKPIT/SIF-US_TYPE
*'' REFERENCE(ID_LDATE) LIKE BAPIUSW01-LDATE
*'' REFERENCE(ID_LTIME) LIKE BAPIUSW01-LTIME
*'' CHANGING
*'' REFERENCE(CS_MESSAGE) LIKE BAPIRET2 STRUCTURE BAPIRET2
*'' OPTIONAL
*'' REFERENCE(CD_LDATE) LIKE BAPIUSW01-LDATE OPTIONAL
*'' REFERENCE(CD_LTIME) LIKE BAPIUSW01-LTIME OPTIONAL
*'' -----
ENDFUNCTION.

```

User Exit 928 – CPD data get

This User Exit is executed at the end of the RFC that is called by the Web Application to get the data of a CPD (one-time) vendor. You can use it to modify all relevant vendor data.

Template

```

FUNCTION /cockpit/wc_usex_cpd_get.
*'' -----
*'' *'' Local interface:
*'' IMPORTING
*'' REFERENCE(IS_HEADER) LIKE /COCKPIT/THDR STRUCTURE
*'' /COCKPIT/THDR
*'' TABLES
*'' ET_VENDOR_FIELDS STRUCTURE /COCKPIT/CWC_CPD
*'' ET_MESSAGES STRUCTURE BAPIRET2
*'' CHANGING
*'' REFERENCE(CS_CPD_DATA) LIKE /COCKPIT/TCPPDK STRUCTURE

```


Template

```

**      /COCKPIT/TCPDK
ENDFUNCTION.

```

User Exit 929 – CPD data set

This User Exit is executed at the beginning of the RFC that is called by the Web Application when a CPD (one-time) vendor data is saved. The User Exit can be used to modify and save the vendor data.

Template

```

FUNCTION /COCKPIT/WC_USEX_CPD_SET.
** -----
** "Local interface:
** IMPORTING
**   REFERENCE(IS_HEADER) LIKE /COCKPIT/THDR STRUCTURE
**   /COCKPIT/THDR
**   REFERENCE(IS_CPD_DATA) LIKE /COCKPIT/TCPDK STRUCTURE
**   /COCKPIT/TCPDK
** EXPORTING
**   REFERENCE(EB_NO_STANDARD) LIKE BOOLE-BOOLE
** TABLES
**   ET_MESSAGES STRUCTURE BAPIRET2
ENDFUNCTION.

```

User Exit 930 – Reset WEB CYCLE user password

This User Exit is executed at the beginning of the RFC that is called by the Web Application when a user resets his/her password. For this User Exit you must set the **No standard** flag, as the values returned by the User Exit are not used in standard processing.

Template

```
FUNCTION /COCKPIT/WC_USEX_USER_PW_RESET.
*''-----
*'''''Local interface:
*'' IMPORTING
*''   REFERENCE(IC_USER) LIKE /COCKPIT/TWB_UMA-WB_USER
*'' EXPORTING
*''   REFERENCE(EC_PASSWORD) LIKE BAPIUID-PASSWORD
*''   REFERENCE(ES_USER) LIKE /COCKPIT/TWB_UMP STRUCTURE
*''   /COCKPIT/TWB_UMP
*''   REFERENCE(ES_MESSAGE) LIKE BAPIRET2 STRUCTURE BAPIRET2
*'' CHANGING
*''   REFERENCE(CB_NO_STANDARD) LIKE BOOLE-BOOLE OPTIONAL
ENDFUNCTION.
```

User Exit 931 – Get user data

Template

```
FUNCTION /COCKPIT/WC_USEX_USER_GET.
*''-----
*'''''Local interface:
*'' IMPORTING
*''   VALUE(I_USER) LIKE /COCKPIT/TWCS-WC_USER OPTIONAL
*''   VALUE(I_PLATFORM_USER) LIKE /COCKPIT/TWC_UMP-EMAIL OPTIONAL
*''   VALUE(I_USER_TYPE) LIKE /COCKPIT/SIF-US_TYPE
```

Template

```
*" VALUE(IS_USER_DATA) LIKE /COCKPIT/TWC_UMP STRUCTURE
*" /COCKPIT/TWC_UMP OPTIONAL
*" VALUE(IC_USER_FIELD) LIKE /COCKPIT/SCHK5-XCHECK1 OPTIONAL
*" VALUE(IB_CHECK_FOR_LOCK) LIKE BOOLE-BOOLE DEFAULT CON_FALSE
*" EXPORTING
*" VALUE(EC_EMAIL) LIKE /COCKPIT/TWC_UMP-EMAIL
*" VALUE(EC_NAME) LIKE /COCKPIT/TWC_UMP-NAME
*" VALUE(EC_PHONE) LIKE /COCKPIT/TWC_UMP-PHONE
*" VALUE(EC_LANGUAGE) LIKE T002-LAISO
*" VALUE(EC_USER) LIKE /COCKPIT/TWCS-WC_USER
*" VALUE(EC_DEPARTMENT) LIKE /COCKPIT/SDUMMY-DPRTMNT
*" VALUE(EB_DOC_SEL) LIKE BOOLE-BOOLE
*" VALUE(ES_MESSAGE) LIKE BAPIRET2 STRUCTURE BAPIRET2
*" VALUE(ED_LDATE) LIKE BAPIUSW01-LDATE
*" VALUE(ED_LTIME) LIKE BAPIUSW01-LTIME
*" VALUE(ES_WC_USER) LIKE /COCKPIT/TWC_UMP STRUCTURE
*" /COCKPIT/TWC_UMP
*" -----
*@US@aa      => Signature of Creator, e.g. HH for Harry Hirsch
*@CU@aaa...   => Customer Name
**@K1@ ... *@K9@ => Keywords for Implemented Functionality
* Dummy entry for user exit cross reference check
IF con_wc_usex_user_get IS INITIAL. ENDIF.
*>>> START OF IMPLEMENTATION >>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>*
**SAMPLE CODING
*IF i_platform_user eq 'ALEXANDER.SCHMIDT@READSOFT.COM'.
*ec_user = 'SCHMIDT'.
*ENDIF.
```


Template

```
*" REFERENCE(CC_PHONE) LIKE /COCKPIT/TWC_UMP-PHONE  
*" REFERENCE(CC_DEPARTMENT) LIKE /COCKPIT/SDUMMY-DPRMNT  
*"-----  
  
*@US@aa      => Signature of Creator, e.g. HH for Harry Hirsch  
*@CU@aaa...   => Customer Name  
*@K1 @ ... *@K9@ => Keywords for Implemented Functionality  
* Dummy entry for user exit cross reference check  
IF con_wc_usex_user_get2 IS INITIAL. ENDIF.  
* >>> START OF IMPLEMENTATION >>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>*  
DATA:  
    It_split LIKE TABLE OF /cockpit/twc_ump-name WITH HEADER LINE,  
    lc_firstname LIKE /cockpit/twc_ump-name,  
    lc_lastname LIKE /cockpit/twc_ump-name.  
* Format 'Lastname, Firstname'  
CASE ic_usertype.  
    WHEN con_sap_user.  
        CONCATENATE is_sap_address-name_last ',' INTO cc_name.  
        CONDENSE cc_name NO-GAPS.  
        CONCATENATE cc_name is_sap_address-name_first INTO cc_name  
            SEPARATED BY space.  
    WHEN con_internet_user.  
        SEARCH is_wc_userdata-name FOR ','.  
        IF sy-subrc NE 0.  
            * Convert format from 'Firstname Lastname'  
            *          to 'Lastname, Firstname'  
            * For example: 'Name1 Name2 Name3 Name4' is converted to  
            *          'Name4, Name1 Name2 Name3'  
        SPLIT is_wc_userdata-name AT '' INTO TABLE It_split.
```

Template

```

IF sy-subrc EQ 0.
  CLEAR cc_name.
  LOOP AT lt_split.
    lc_lastname = lt_split.
  AT LAST.
    CONCATENATE lc_lastname ',' INTO lc_lastname.
    CONDENSE lc_lastname NO-GAPS.
    CONCATENATE lc_lastname cc_name INTO cc_name
      SEPARATED BY space.
  EXIT.
ENDAT.
  CONCATENATE cc_name lt_split
    INTO cc_name SEPARATED BY space.
ENDLOOP.
ENDIF.
CONDENSE cc_name.
ENDIF.
WHEN con_partner_user.
*   nothing todo
WHEN OTHERS.
*   nothing todo
ENDCASE.
** Format 'Firstname Lastname'
* CASE ic_usertype.
*   WHEN con_sap_user.
**   nothing todo
*   WHEN con_internet_user.
*   SPLIT is_wc_userdata-name AT ',' INTO lc_lastname lc_firstname.

```

[illegible]

User Exit 933 – Get approved documents

This User Exit lists the approved and rejected documents from another user. This is helpful if someone has more than one user account in SAP. With this User Exit active, clicking Workflow > Display releases (History) lists documents from the currently logged-in user plus any additional accounts configured with this User Exit (and complementary user mapping table).

Template	
FUNCTION /cockpit/wc_usex_approved_get.	
<pre> **"----- **"Local interface: **" IMPORTING **" REFERENCE(IC_WC_USERTYPE) LIKE /COCKPIT/SWC_IF-WC_USERTYPE **" VALUE(IC_WC_USER) LIKE /COCKPIT/SWC_IF-WC_USER **" REFERENCE(IC_LANGUAGE) LIKE SY-LANGU DEFAULT SY-LANGU **" REFERENCE(IB_ALL_WCS) LIKE BOOLE-BOOLE OPTIONAL **" TABLES **" IR_WC_ID STRUCTURE /COCKPIT/RWC_ID </pre>	

Template

```
*|| IR_TIMESTAMP STRUCTURE /COCKPIT/RTSTMP
*|| IT_INPUT_SEL STRUCTURE /COCKPIT/SWB_SELTAB
*|| CT_HEADER STRUCTURE /COCKPIT/SHDR_IF
*|| CT_WEBCYCLE STRUCTURE /COCKPIT/swc_if
*|| CT_APPROVED STRUCTURE /COCKPIT/swc_approved
*|| CT_APPROVER STRUCTURE /COCKPIT/swc_approver
*|| CT_FLAG STRUCTURE /COCKPIT/tflag
*|| CT_MESSAGES STRUCTURE BAPIRET2
*|| EXCEPTIONS
*|| NOT_FOUND
*|| -----
*@US@aa      => Signature of Creator, e.g. HH for Harry Hirsch
*@CU@aaa...   => Customer Name
*@K1@ ... *@K9@ => Keywords for Implemented Functionality
* ICS1435 New User-Exit 933 in /COCKPIT/WC_APPROVED_GET
* Dummy entry for user exit cross reference check
IF con_wc_usex_approved_get IS INITIAL. ENDIF.
*>>> START OF IMPLEMENTATION >>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>*
TYPES:
BEGIN OF ys_user_map,
    new_wc_usertype LIKE /cockpit/swc_if-wc_usertype,
    new_wc_user     LIKE /cockpit/swc_if-wc_user,
    old_wc_usertype LIKE /cockpit/swc_if-wc_usertype,
    old_wc_user     LIKE /cockpit/swc_if-wc_user,
END OF ys_user_map.

STATICS:
sb_old_user LIKE boole-boole.

DATA:
```


Template

```

lt_user_map TYPE TABLE OF ys_user_map,
ls_user_map TYPE ys_user_map,
lt_header  LIKE TABLE OF /cockpit/shdr_if,
lt_webcycle LIKE TABLE OF /cockpit/swc_if,
lt_approved LIKE TABLE OF /cockpit/swc_approved,
lt_approver LIKE TABLE OF /cockpit/swc_approver,
lt_flag    LIKE TABLE OF /cockpit/tflag,
lt_messages LIKE TABLE OF bapiret2.
CHECK sb_old_user IS INITIAL.
sb_old_user = con_true.
* >>> User mapping
ls_user_map-new_wc_usertype = con_sap_user.
ls_user_map-new_wc_user = 'GERKE'.
ls_user_map-old_wc_usertype = con_sap_user.
ls_user_map-old_wc_user = 'GERKE2'.
APPEND ls_user_map TO lt_user_map.
READ TABLE lt_user_map INTO ls_user_map
      WITH KEY new_wc_usertype = ic_wc_usertype
            new_wc_user      = ic_wc_user.
* <<< User mapping
IF sy-subrc EQ 0.
  CALL FUNCTION '/COCKPIT/WC_APPROVED_GET'
    EXPORTING
      ic_wc_usertype = ls_user_map-old_wc_usertype
      ic_wc_user      = ls_user_map-old_wc_user
      ic_language      = ic_language
      ib_all_wcs       = ib_all_wcs
TABLES

```

Template

[illegible]

User Exit 934 – Manipulate WORK CYCLE flow definition

This User Exit provides the possibility to dynamically add a parallel step to a workflow.

Template

[illegible]

User Exit 935 – Note check

Template

```
FUNCTION /COCKPIT/WC_USEX_NOTE_CHECK.  
*''-----  
*''*''Local interface:  
*'' IMPORTING
```

Template

[illegible]

User Exit 936: List of possible substitutes

This User Exit provides the possibility to limit the list of users that can be selected as a substitute.

Template

```
FUNCTION /COCKPIT/WC_USEX_SUBS_LIST.

**-----

***"Local interface:

**  IMPORTING

**    VALUE(I_USER) LIKE  /COCKPIT/TWCS-WC_USER

**    VALUE(I_USER_TYPE) LIKE  /COCKPIT/TWCS-WC_USERTYPE

**    VALUE(I_EMAIL_SEARCH) LIKE  /COCKPIT/TWC_UMP-EMAIL OPTIONAL
```

[illegible]

LDAP User Exit 1 - Assign LDAP attribute to WORK CYCLE user field

Template
<pre>FUNCTION /cockpit/wc_usex_ldapsimplemap. *"----- **" Local interface:</pre>

Template

```

** IMPORTING
**   REFERENCE(INPUT) TYPE C
** EXPORTING
**   REFERENCE(OUTPUT) TYPE C
ENDFUNCTION.

```

Search help User Exit – Search help for a field in the Web Application

This User Exit is called when a value is searched (using search help) in the Web Application. The User Exit can override settings from the search help configuration in order to influence the search behavior.

Template

```

FUNCTION /cockpit/wc_usex_shlp.
** -----
** ** Local interface:
** IMPORTING
**   REFERENCE(IC_STRUCTURE) LIKE /COCKPIT/SFIELDS-STRUCTURE
**   REFERENCE(IC_FIELD_NAME) LIKE /COCKPIT/SFIELDS-FIELD_SAP
**   REFERENCE(IC_INVOICE_GUID) LIKE /COCKPIT/SINV_GUID-INVOICE_GUID
**   OPTIONAL
**   REFERENCE(II_MAX_ROWS) LIKE BAPIF4A-MAX_ROWS DEFAULT 500
** TABLES
**   IT_INPUT_FIELDS STRUCTURE /COCKPIT/SWC_SHLP_NAMEVAL
**   ET_RESULTS STRUCTURE /COCKPIT/SWC_SHLP_GRPDMVL
** EXCEPTIONS
**   NO_SHLP_FOUND
**   INVALID_GUID
ENDFUNCTION.
** -----

```

Template

[illegible]

Step User Exit 1 – Check step conditions

With this User Exit it is possible to control whether a workflow step should be triggered or not (by raising the NOT_VALID exception). This User Exit is activated per workflow step, and must be specified in **Check if the WORK CYCLE sep can be started** in the workflow step definition ([/COCKPIT/WI3](#)).

Template

```

FUNCTION /cockpit/wc_usex_conditions.

  "-----
  " " " Local interface:
  " IMPORTING
  "   REFERENCE(IS_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
  "   /COCKPIT/SHDR_IF
  "   REFERENCE(IS_WEBCYCLE) LIKE /COCKPIT/SWC_WEBCYCLE STRUCTURE
  "   /COCKPIT/SWC_WEBCYCLE
  "   REFERENCE(IS_WC_STEP) LIKE /COCKPIT/SWC_STEP STRUCTURE
  "   /COCKPIT/SWC_STEP
  "   REFERENCE(IS_WC_FLOW) LIKE /COCKPIT/SWC_FLOW STRUCTURE
  "   /COCKPIT/SWC_FLOW OPTIONAL
  " TABLES
  "   IT_ITEM STRUCTURE /COCKPIT/SITEM_IF
  "   IT_ACCOUNT STRUCTURE /COCKPIT/SACCT_IF
  "   IT_TAX STRUCTURE /COCKPIT/STAX_IF
  "   ET_MESSAGES STRUCTURE BAPIRET2
  " EXCEPTIONS
  "   NOT_VALID
ENDFUNCTION.
```


Step User Exit 2 – Determine processor of step

Use this User Exit to determine the receivers of a workflow step. Receivers are transferred to the ET_RECEIVER table. This User Exit is activated per workflow step, and must be specified in **Define possible processors and parallel steps** in the workflow step definition ([/COCKPIT/WI3](#)).

In addition to determining the recipient of a document, you can also use this User Exit to assign line and accounting items to processors. Use the ET_ITM_RCVR structure for this purpose.

Template

```

FUNCTION /cockpit/wc_usex_receivers.
*''-----
*''
*'' Local interface:
*''
*'' IMPORTING
*''
*'' REFERENCE(IB_CONTINUE) LIKE BOOLE-BOOLE
*'' REFERENCE(IS_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
*''   /COCKPIT/SHDR_IF
*'' REFERENCE(IS_WEBCYCLE) LIKE /COCKPIT/SWC_WEBCYCLE STRUCTURE
*''   /COCKPIT/SWC_WEBCYCLE
*'' REFERENCE(IS_WC_STEP) LIKE /COCKPIT/SWC_STEP STRUCTURE
*''   /COCKPIT/SWC_STEP
*'' REFERENCE(IS_WC_FLOW) LIKE /COCKPIT/SWC_FLOW STRUCTURE
*''   /COCKPIT/SWC_FLOW
*''
*'' TABLES
*''
*'' IT_ITEM STRUCTURE /COCKPIT/SITEM_IF
*'' IT_ACCOUNT STRUCTURE /COCKPIT/SACCT_IF
*'' IT_TAX STRUCTURE /COCKPIT/STAX_IF
*'' ET_RECEIVER STRUCTURE /COCKPIT/SWC_RECEIVER
*'' ET_ITM_RCVR STRUCTURE /COCKPIT/SWC_LIA_RECEIVER OPTIONAL
*'' ET_MESSAGES STRUCTURE BAPIRET2
*''
*'' EXCEPTIONS
*''
*'' NOT_FOUND

```

Template

[illegible]

Step User Exit 3 – After performing an action

This User Exit is called after all process-related actions (for example, save and approve) from within the SAP GUI or the Web Application. If the current process is interrupted the ERROR_OCCURED exception should be raised.

This User Exit is activated per workflow step, and must be specified in **Logic after the step action has been performed** in the workflow step definition ([/COCKPIT/WI3](#)).

Template

```

FUNCTION /COCKPIT/WC_USEX_CHECK_ACTION .
*''-----
*'''''Local interface:
*'' IMPORTING
*''   REFERENCE(IS_WC_DATA) LIKE  /COCKPIT/SWC_IF STRUCTURE
*''   /COCKPIT/SWC_IF
*''   REFERENCE(IS_WEBCYCLE) LIKE  /COCKPIT/SWC_WEBCYCLE STRUCTURE
*''   /COCKPIT/SWC_WEBCYCLE
*''   REFERENCE(IS_WC_STEP) LIKE  /COCKPIT/SWC_STEP STRUCTURE
*''   /COCKPIT/SWC_STEP
*''   VALUE(IC_WC_DYNPRO) LIKE  /COCKPIT/SDUMMY-CHAR1 OPTIONAL
*''   REFERENCE(IS_SUBSTITUTE) LIKE  /COCKPIT/SWC_USER STRUCTURE
*''   /COCKPIT/SWC_USER OPTIONAL
*''   VALUE(IC_ACTION) LIKE  /COCKPIT/SWC_DUMMY-RUN_TYPE OPTIONAL
*''   REFERENCE(IB_UPDATE) LIKE  BOOLE-BOOLE OPTIONAL
*'' TABLES
*''   CT_ITEM STRUCTURE  /COCKPIT/SITEM_IF
*''   CT_ACCOUNT STRUCTURE  /COCKPIT/SACCT_IF
*''   CT_TAX STRUCTURE  /COCKPIT/STAX_IF
*''   CT_ACCOUNT_ASSIGN STRUCTURE  /COCKPIT/TACCAS OPTIONAL
*''   CT_NOTE STRUCTURE  /COCKPIT/SWC_NOTE OPTIONAL
*''   ET_MESSAGES STRUCTURE  BAPIRET2

```

[illegible]

Step User Exit 4 – After full release

This User Exit is called after a workflow step is approved. It can be used to do some post processing. Simply raising an exception here will not change the fact that the step is approved.

This User Exit is activated per workflow step, and must be specified in **Logic after the step has been released** in the workflow step definition ([/COCKPIT/WI3](#)).

Template
<pre> FUNCTION /COCKPIT/WC_USEX_AFTER_EXEC. **----- **" Local interface: ** IMPORTING ** REFERENCE(IS_WC_DATA) LIKE /COCKPIT/SWC_IF STRUCTURE </pre>

Template

```

**      /COCKPIT/SWC_IF
**      REFERENCE(IS_WEBCYCLE) LIKE /COCKPIT/SWC_WEBCYCLE STRUCTURE
**      /COCKPIT/SWC_WEBCYCLE
**      REFERENCE(IS_WC_STEP) LIKE /COCKPIT/SWC_STEP STRUCTURE
**      /COCKPIT/SWC_STEP
**      REFERENCE(IB_ONLINE) LIKE BOOLE-BOOLE OPTIONAL
** TABLES
**      CT_ITEM STRUCTURE /COCKPIT/SITEM_IF
**      CT_ACCOUNT STRUCTURE /COCKPIT/SACCT_IF
**      CT_TAX STRUCTURE /COCKPIT/STAX_IF
**      ET_MESSAGES STRUCTURE BAPIRET2
** CHANGING
**      REFERENCE(CS_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
**      /COCKPIT/SHDR_IF
** EXCEPTIONS
**      ERROR_OCCURED
ENDFUNCTION.

```

Step User Exit 5 – Check step recipient

This User Exit checks recipients of a workflow step. This User Exit is activated per workflow step, and must be specified in **Check recipients of the step** in the workflow step definition ([/COCKPIT/WI3](#)).

Template

```

FUNCTION /COCKPIT/WC_USEX_USER_CHECK.
** -----
**"Local interface:
** IMPORTING

```

Template

```

*'' REFERENCE(IC_WC_ID) LIKE /COCKPIT/TWC-WC_ID
*'' REFERENCE(IC_WC_STEP_ID) LIKE /COCKPIT/TWCS-WC_STEP_ID
*'' REFERENCE(IS_HEADER) LIKE /COCKPIT/SHDR_IF STRUCTURE
*'' /COCKPIT/SHDR_IF
*'' REFERENCE(IC_USER_EMAIL) LIKE /COCKPIT/TWC_UMP-EMAIL
*'' REFERENCE(IC_USER_TYPE) LIKE /COCKPIT/SWC_USERS-WC_USERTYPE_GRP
*'' REFERENCE(IC_ACTION) LIKE /COCKPIT/SWC_DUMMY-ACTION_TYPE
*'' OPTIONAL
*'' EXPORTING
*'' REFERENCE(EC_USER) LIKE /COCKPIT/TWCS-WC_USER
*'' REFERENCE(EC_USER_TYPE) LIKE /COCKPIT/SIF-US_TYPE
*'' REFERENCE(ES_MESSAGE) LIKE BAPIRET2 STRUCTURE BAPIRET2
ENDFUNCTION.


```

Appendix C – Other tasks


Copying forms to another client

Forms are imported as separate transports. They can only be imported into client 000. After import, you must copy them to the target client. The following procedure shows how to copy the /COCKPIT/TEXT form from client 000:

1. Log on to the client you wish to copy the form to.
2. Go to /SE71.
3. Go to **Utilities > Copy from Client**.

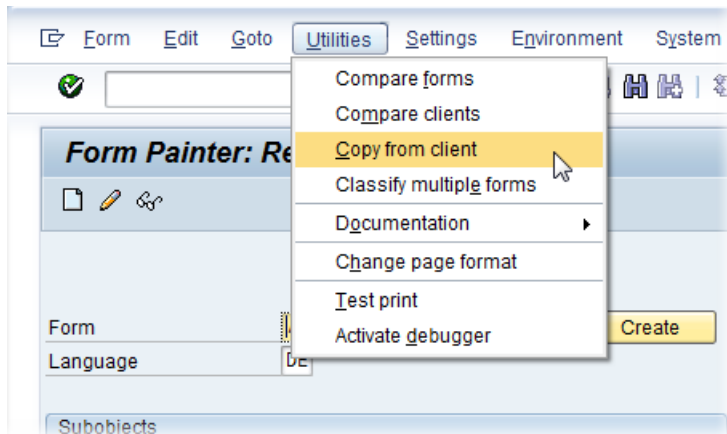

4. Enter the **Form name**, **Source client** and **Target form** (name).

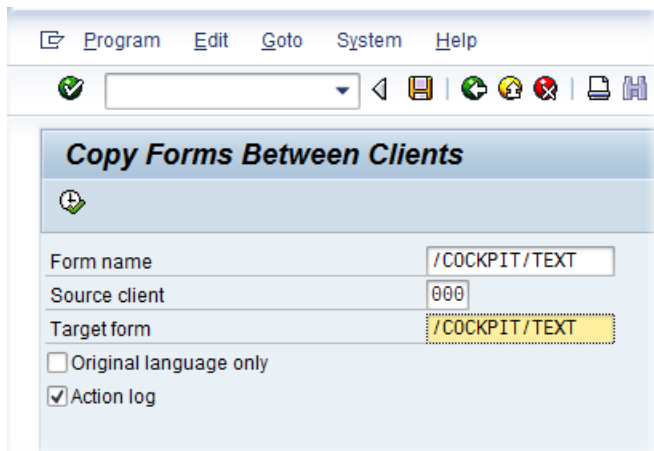

5. Select **Execute**.

Support for other languages

WORK CYCLE is available in many languages. In order to support the creation of workflow notes in Russian and Polish, the following SAP notes must be installed:

- SAP note 322998 (for Russian)
- SAP note 141343 (for Polish)

Index

- /
- /COCKPIT/C31 77
- /COCKPIT/C32 78
- /COCKPIT/WBI7 90
- /COCKPIT/WC_WCID 57
- /COCKPIT/WI1 57
- /COCKPIT/WI10 98
- /COCKPIT/WI11 78
- /COCKPIT/WI12 81
- /COCKPIT/WI13 74
- /COCKPIT/WI14 81
- /COCKPIT/WI16 82
- /COCKPIT/WI17 66
- /COCKPIT/WI19 84
- /COCKPIT/WI22 74
- /COCKPIT/WI24 83
- /COCKPIT/WI25 88
- /COCKPIT/WI26 89
- /COCKPIT/WI27 91
- /COCKPIT/WI28 75
- /COCKPIT/WI29 90
- /COCKPIT/WI3 59
- /COCKPIT/WI30 76
- /COCKPIT/WI33 97
- /COCKPIT/WI4 70
- /COCKPIT/WI5 96
- /COCKPIT/WI6 92
- /COCKPIT/WI7 72
- /COCKPIT/WI8 97
- /COCKPIT/WI9 73
- /COCKPIT/WUM1 95
- /COCKPIT/WUM2 69
- A**
- accounting lines
 - approving individually 10
- activating workflows 8
- appearance
 - HTML email templates 26
- ARCHIV_NOTE_LATE 50
- ARCHIV_WCLOG_REPAIR 50
- archiving
 - notes 50
- attachments
 - supported for upload in Web App 82
- C**
- collective emails
 - sending 51
- conditions 11
 - creating 11
- copying/forms to other clients 158
- D**
- deleting
 - workflows 15
- documents
 - viewing ones not in a workflow 29
- E**
- email templates
 - built-in 21
 - changing HTML styles 26
 - URL 57
 - using HTML 25
- emails

- creating templates 20
- list of variables 22
- templates 20

F

fields

- creating field statuses 29
- for one-time vendors 28, 90
- to display in Web Application 78
- when displaying workflow history 83

forms

- archiving 82
- copying to other clients 158

functions

- executing via menu 81
- overview 49

H

HTML

- images in emails 27
- using for emails 25

I

images

- adding to SAP Web Repository 27
- in HTML emails 27

IMG 56

L

LDAP directory

- importing users from 17, 54

line items

- approving individually 10

line-item approval 10

logs

- RFC 52

M

mandatory notes 57

menus

- adding extra items 81

messages

- change type 74
- suppress 74

N

notes

- archiving 50
- mandatory 57
- Russian and Polish 159
- settings 97

O

one-time vendors

- fields 28, 90

overdue emails

- sending 51

P

passwords

- changing for multiple users 53

Polish

- enabling for notes 159

pre-allocation of users 9

profiles

- for substitutes 18, 97

programs

- ARCHIV_NOTE_LATE 50
- ARCHIV_WCLOG_REPAIR 50
- DUE_DATE_CHECK 51
- overview 49
- WC_CHK_DEL_USRS 52
- WC_DEBUG 52
- WC_RFC_LOG 52
- WC_SET_NOT_ARCHIVED 50
- WC_USER_UPDATE 54
- WC_WEB_LOGGING 56
- XPRA_V720_SP0 56

R

recipient

- determining via User Exit 153

reminder emails 51

Russian

enabling for notes 159

S

SAP Business Workflow 32

SAP Business Workflow integration

activating the workflow definition 44

adding a container operation 38

adding an activity for the WORK CYCLE
workflow step 39

creating a container element 34

creating a new workflow definition 33

overview 32

prerequisites for UWL 45

setting up the workflow start event 36

search help

default settings 87

edit 84

for users in SAP 96

steps

in a workflow 7

styles

HTML email templates 26

substitutes

profiles 18, 97

T

templates

creating for emails 20

for emails 20

text

default for emails 21

in email templates 20

U

upload

supported attachments in Web App 82

URL

Web Application 57

User Exits

900 - Before starting/continuing a workflow
105

901 - Change WORK CYCLE message texts
107

902 - Determine all WEB CYCLE workflows
for one processor 109

902 - Determine all WORK CYCLE workflows
for one processor 109

903 - Change WORK CYCLE notes and
releases to be archived 109

904 - Change subjects of WORK CYCLE
messages 110

905 - Own reminder function in WORK
CYCLE 111

906 - After starting/continuing a workflow and
before saving 112

907 - Custom behaviour after workflow
reminder 113

908 - Own logic for email at workflow start 114

909 - Define further or different substitutions
115

910 - Own logic for determining user type and
email 116

911 - Define further or other substitutes 117
112

Own or additional logic when sending an
email 117

913 - When finishing a workflow 119

914 - Adjust call of SAP API for sending
emails 120

915 - Adjust/Replace general account
assignment block check 121

916 - Adjust/Replace account assignment
block check for vendor Ps 122

917 - Data check in the Web Application 123

918 - File upload via the Web Application 125

919 - Calculate workflow validity period (due
date) 126

920 - Amend work item creation for SAP
Business Workflow 127

921 - Adapt what data the Web Application
gets 128

922 - Read the overview data in WORK
CYCLE 131

- 923 - User check during logon to the Web Application 132
- 924 - Set substitutes for the workflow 133
- 925 - Set substitutes for SAP users 134
- 926 - Adapt search help determination for check tables 135
- 927 - After saving the logon timestamp 135
- 928 - CPD data get 136
- 929 - CPD data set 137
- 930 - Reset WORK CYCLE user password 138
- 931 - Get user data 138
- 932 - Get user data 140
- 933 - Get approved documents 143
- 934 - Manipulate WORK CYCLE flow definition 147
- 935 - Note check 147
- 936 - List of possible substitutes 148
- activating 99
- developing 100
- LDAP User Exit 1 149
- overview 99
- Searchhelp User Exit 150
- Step User Exit 1
 - Step check conditions 152
- Step User Exit 2
 - Determine processor of step 153
- Step User Exit 3
 - After performing an action 155
- Step User Exit 4
 - After full release 156
- Step User Exit 5
 - Check step recipient 157
- user groups 94
 - creating 17
- users
 - creating 16
 - importing from a file 16
 - importing from LDAP directory 17, 54
 - manage 94
 - overview 15
 - pre-allocation matrix 9
- UWL 45

- V**
 - variables
 - within emails 22
- W**
 - WC_CHK_DEL_USRS 52
 - WC_DEBUG 52
 - WC_RFC_LOG 52
 - WC_SET_NOT_ARCHIVED 50
 - WC_UMA_PASSWD_INIT 53
 - WC_USER_UPDATE 54
 - WC_WEB_LOGGING 56
 - Web Application
 - fields 78
 - fields for one-time vendors 90
 - URL 57
 - WORK CYCLE
 - users 94
 - workflow
 - building from steps 7
 - workflow history
 - selection fields 83
 - workflow recipients
 - assigning 8
 - workflow steps 7
 - conditions 11
 - deleting 15
 - pre-allocation user matrix 9
 - using in multiple workflows 7
 - workflows
 - activating 8
 - assigning default recipients 8
 - creating 6
 - deleting 15
 - integrating with SAP Business Workflow 32
 - workflow shells 7
 - workflow steps 7
 - worklist

layout 81

X
XPRA_V720_SP0 56